



# Dimension and Specification Handbook



# Important Safety Instructions-All Models



© 2021 Jacuzzi Hot Tubs. Jacuzzi may make product modifications and enhancements. Therefore, specifications may change without notice.  
Dimensions are approximate and for reference only.



**CAUTION: ALWAYS MEASURE EACH SPA FOR EXACT DIMENSIONS BEFORE DESIGNING ITS FOUNDATIONAL SUPPORT AND/OR DECKING.**



When designing a foundational support, always account for the following load factors:

1. Filled spa weight, plus (+)
2. Combined occupant weight at the maximum seating capacity, plus (+)
3. Weight of the support decking, when applicable.



The technical data given in this publication is for reference only. It implies no warranty of kind.



Dimensions/Specifications subject to change without notice. Spa operation subject to change without notice.

# Table of Contents

<b>Jacuzzi J-500™ Collection Hot Tubs .....</b>	<b>7</b>
<b>J-585™ Specifications .....</b>	<b>7</b>
<b>J-585 Operations .....</b>	<b>8</b>
<b>J-585 Dimensions.....</b>	<b>9</b>
<b>J-575™ Specifications .....</b>	<b>10</b>
<b>J-575 Operations .....</b>	<b>11</b>
<b>J-575 Dimensions.....</b>	<b>12</b>
<b>Jacuzzi J-400™ Collection Hot Tubs .....</b>	<b>13</b>
<b>J-495™ Specifications .....</b>	<b>13</b>
<b>J-495 Operations .....</b>	<b>14</b>
<b>J-495 Dimensions.....</b>	<b>15</b>
<b>J-485™ Specifications .....</b>	<b>16</b>
<b>J-485 Operations .....</b>	<b>17</b>
<b>J-485 dimensions .....</b>	<b>18</b>
<b>J-475™ Specifications .....</b>	<b>19</b>
<b>J-475 Operations .....</b>	<b>20</b>
<b>J-475 Dimensions.....</b>	<b>21</b>
<b>J-445™ Specifications .....</b>	<b>22</b>
<b>J-445 Operations .....</b>	<b>23</b>
<b>J-445 Dimensions.....</b>	<b>24</b>
<b>J-435™ Specifications .....</b>	<b>25</b>
<b>J-435 Operations .....</b>	<b>26</b>
<b>J-435 Dimensions.....</b>	<b>27</b>
<b>Jacuzzi J-LX® Collection Hot Tubs .....</b>	<b>28</b>
<b>J-LXL® Specifications .....</b>	<b>28</b>
<b>J-LXL Operations .....</b>	<b>29</b>
<b>J-LXL Dimensions.....</b>	<b>30</b>
<b>J-LX® Specifications.....</b>	<b>31</b>
<b>J-LX Operations.....</b>	<b>32</b>
<b>J-LX Dimensions .....</b>	<b>33</b>

# Table of Contents

<b>J-LXS® Specifications .....</b>	<b>34</b>
<b>J-LXS Operations .....</b>	<b>35</b>
<b>J-LXS Dimensions.....</b>	<b>36</b>
<b>Jacuzzi J-300™ Collection Hot Tubs .....</b>	<b>37</b>
<b>J-385™ Specifications .....</b>	<b>37</b>
<b>J-385 Operations .....</b>	<b>38</b>
<b>J-385 Dimensions.....</b>	<b>39</b>
<b>J-375™ Specifications .....</b>	<b>40</b>
<b>J-375 Operations .....</b>	<b>41</b>
<b>J-375 Dimensions.....</b>	<b>42</b>
<b>J-365™ Specifications .....</b>	<b>43</b>
<b>J-365 Operations .....</b>	<b>44</b>
<b>J-365 Dimensions.....</b>	<b>45</b>
<b>J-355™ Specifications .....</b>	<b>46</b>
<b>J-355 Operations .....</b>	<b>47</b>
<b>J-355 Dimensions.....</b>	<b>48</b>
<b>J-345™ Specifications .....</b>	<b>49</b>
<b>J-345 Operations .....</b>	<b>50</b>
<b>J-345 Dimensions.....</b>	<b>51</b>
<b>J-335™ Specifications .....</b>	<b>52</b>
<b>J-335 Operations .....</b>	<b>53</b>
<b>J-335 Dimensions.....</b>	<b>54</b>
<b>J-325™ Specifications .....</b>	<b>55</b>
<b>J-325 Operations .....</b>	<b>56</b>
<b>J-325 Dimensions.....</b>	<b>57</b>
<b>J-315™ Specifications .....</b>	<b>58</b>
<b>J-315 Operations .....</b>	<b>59</b>
<b>J-315 Dimensions.....</b>	<b>60</b>

# Table of Contents

<b>Jacuzzi J-200™ Collection Hot Tubs .....</b>	<b>61</b>
<b>J-280™ Specifications .....</b>	<b>61</b>
<b>J-280 Operations .....</b>	<b>62</b>
<b>J-280 Dimensions.....</b>	<b>63</b>
<b>J-275™ Specifications .....</b>	<b>64</b>
<b>J-275 Operations .....</b>	<b>65</b>
<b>J-275 Dimensions.....</b>	<b>66</b>
<b>J-245™ Specifications .....</b>	<b>67</b>
<b>J-245 Operations .....</b>	<b>68</b>
<b>J-245 Dimensions.....</b>	<b>69</b>
<b>J-235™ Specifications .....</b>	<b>70</b>
<b>J-235 Operations .....</b>	<b>71</b>
<b>J-235 Dimensions.....</b>	<b>72</b>
<b>J-225™ Specifications .....</b>	<b>73</b>
<b>J-225 Operations .....</b>	<b>74</b>
<b>J-225 Dimensions.....</b>	<b>75</b>
<b>J-210™ Specifications .....</b>	<b>76</b>
<b>J-210 Operations .....</b>	<b>77</b>
<b>J-210 Dimensions.....</b>	<b>78</b>
<b>Play™ Collection .....</b>	<b>79</b>
<b>Soul™ 40 Jets Square Lounge Specifications .....</b>	<b>79</b>
<b>Soul 40 Jets Square Lounge Operation/Seat Depths .....</b>	<b>80</b>
<b>Soul 40 Jets Square Lounge Portable Dimensions .....</b>	<b>81</b>
<b>Soul™ 30 Jets Square Lounge Specifications .....</b>	<b>82</b>
<b>Soul 30 Jets Square Lounge Operation/Seat Depths .....</b>	<b>83</b>
<b>Soul 30 Jets Square Lounge Portable Dimensions .....</b>	<b>84</b>
<b>Echo™ 40 Jets Square Specifications .....</b>	<b>85</b>
<b>Echo 40 Jets Square Operation/Seat Depths .....</b>	<b>86</b>
<b>Echo 40 Jets Square Portable Dimensions .....</b>	<b>87</b>

<i>Echo™ 30 Jets Square Specifications .....</i>	88
<i>Echo 30 Jets Square Operation/Seat Depths .....</i>	89
<i>Echo 30 Jets Square Portable Dimensions .....</i>	90
<i>Mood™ 20 Jets Rectangle Specifications.....</i>	91
<i>Mood 20 Jets Rectangle Operation/Seat Depths.....</i>	92
<i>Mood 20 Jets Rectangle Portable Dimensions.....</i>	93
<b><i>Complete Dimensions - J500™ Collection Models .....</i></b>	<b>94</b>
<b><i>Complete Dimensions -J 400™ Collection Models .....</i></b>	<b>95</b>
<b><i>Complete Dimensions - J-LX® Collection Models .....</i></b>	<b>96</b>
<b><i>Complete Dimensions - J300™ Collection Models .....</i></b>	<b>97</b>
<b><i>Complete Dimensions - J200™ Collection Models .....</i></b>	<b>98</b>

# Jacuzzi J-585

## Specifications


<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....91" x 91" x 37.5" Front/42" Side, (231.0 cm x 231.0 cm x 95.25 cm Front/107.0 cm Side); <b>For complete dimensions, See page 94</b>
<b>Perimeter</b>	.....364 in. (924.6 cm)
<b>Dry Weight</b>	.....897 lbs (407 kg)
<b>Filled Weight (Spa Volume)</b>	.....5,403 lbs (2,451 kg)
<b>Filled Weight (Average Fill)</b>	.....4,569 lbs (2,072 kg)
<b>Water Capacity (Spa Volume)</b>	.....540 US gallons (2,044 Liters)
<b>Water Capacity (Average Fill)</b>	.....440 US gallons (1,666 Liters)
<b>Electronic Controls</b>	.....ProTouch™ Glass user interface. Touch-screen LCD displays temperature, time, cycles and jet control. Offers customizing of filtration cycles, CLEARRAY on demand, cleaning cycles and water temperature setting.
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-Hour
<b>Total PowerPro® Jets</b>	.....46
<b>Seat A Jets</b>	.....4 PowerPro® FX Rotational, 3 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....6 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX
<b>Seat C Jets</b>	.....2 PowerPro® RX, 2 PowerPro® FX
<b>Seat D Jets</b>	.....6 PowerPro® RX, 2 PowerPro® FX Directional
<b>Seat E Jets</b>	.....2 PowerPro® FX Large Rotational
<b>Seat F Jets</b>	.....3 PowerPro® MX
<b>Footwell (G)</b>	.....8 PowerPro® FX Small
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4
<b>Water Management System</b>	.....One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz):</b> ..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....Exterior corner lights, ProEdge™ interior lighting, two waterfall lights, one footwell light
<b>Synthetic Cabinet Colors</b>	.....Silverwood, Roasted Chestnut
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz):</b> ..... <b>230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz):</b> ..... <b>10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features</b>	.....Factory installed SmartTub™ Module
<b>Audio System (Optional)</b>	.....BLUEWAVE® Wireless Spa Stereo System with Aux 3.5 mm jack port and Bluetooth capability; 4 single driver speakers and a powered subwoofer



# Jacuzzi J-585

## Operation/Seat Depths

- Jets C are powered at all times when pump 1 is running

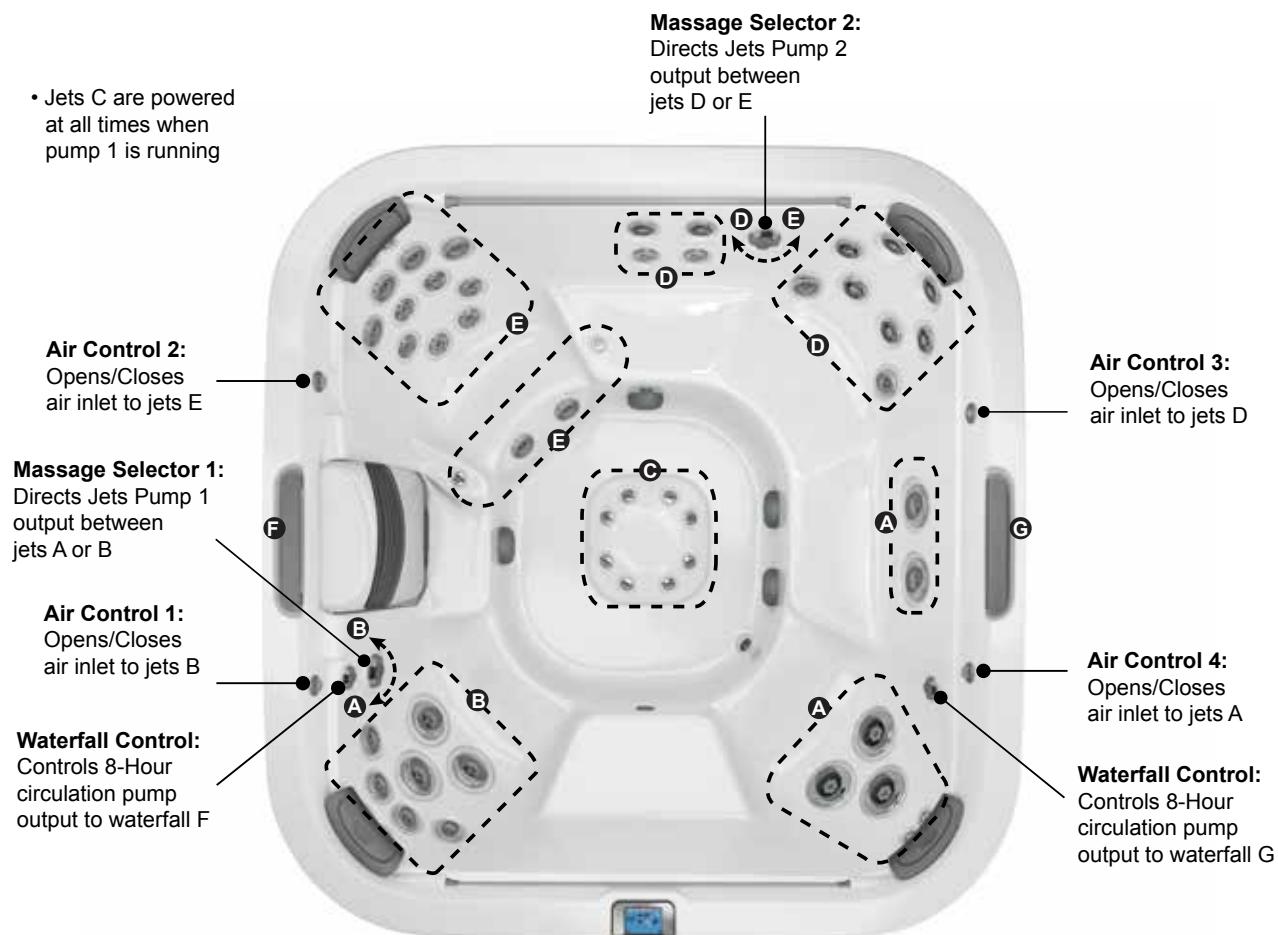

### 46 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 26.63" (67.64 cm)**  
**B = 21.00" (53.34 cm)**  
**C = 27.00" (68.58 cm)**  
**D = 20.00" (50.80 cm)**  
**E = 23.00" (58.42 cm)**  
**F = 21.38" (54.31 cm)**

**G = 24.50" (62.23 cm)**  
**H = 20.13" (51.13 cm)**  
**I = 33.00" (83.82 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-585


## Dimensions

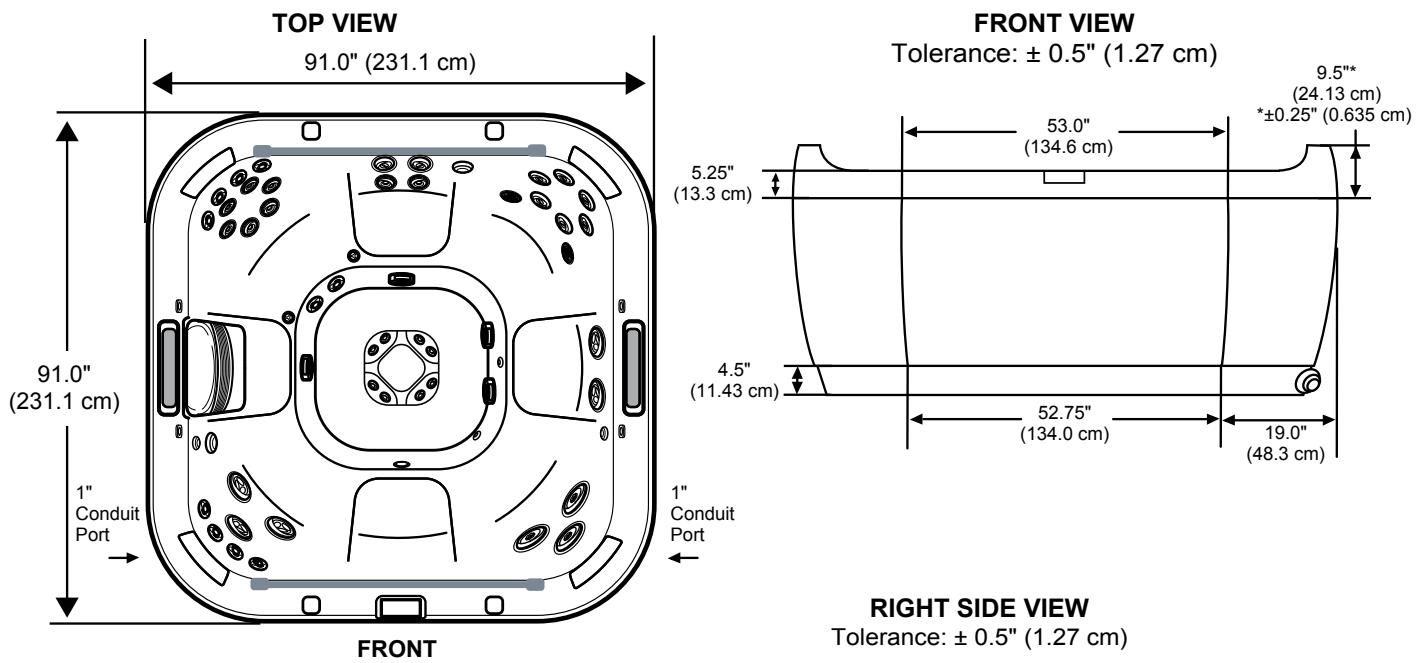

**FRONT**  
Behind the cabinet  
Equipment Bay/Pump Access  
(Location of Controller, CLEARRAY,  
QuickDrain, SmartTub system  
and Optional BLUEWAVE)

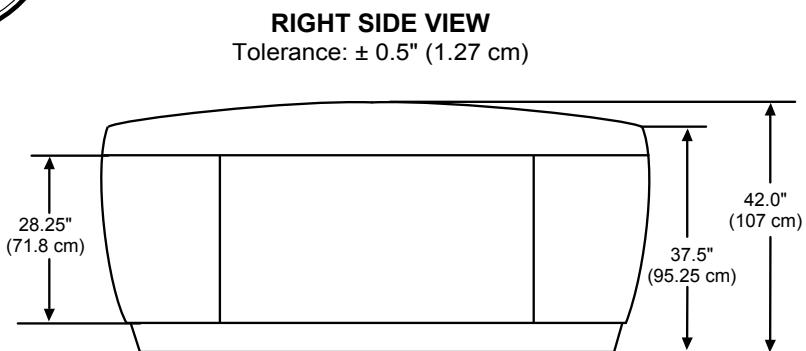

**IMPORTANT!** Always measure  
each hot tub for exact dimensions  
**BEFORE** designing its foundational  
support and/or decking.

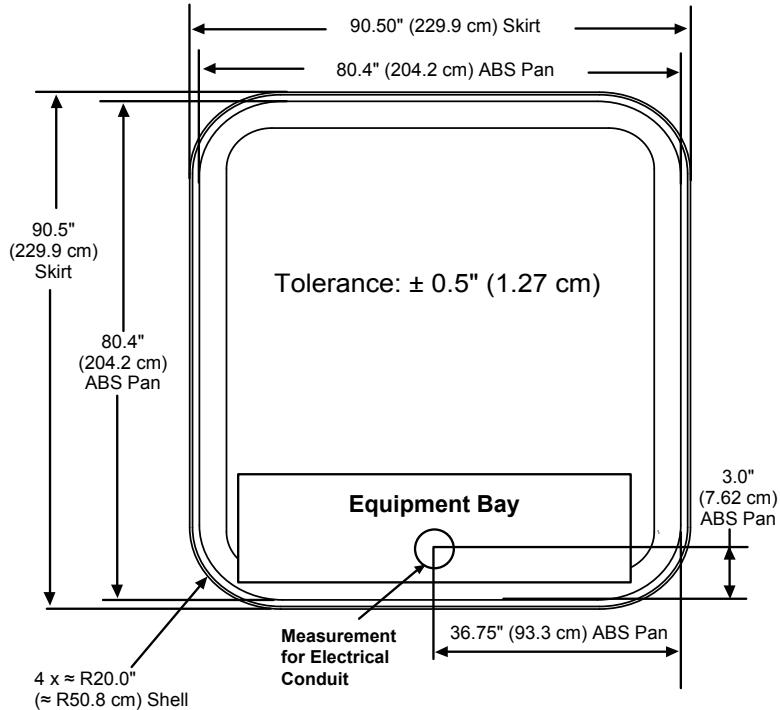


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-575


## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	91" x 91" x 37.5" Front/42" Side, (231.0 cm x 231.0 cm x 95.25 cm Front/107.0 cm Side); <b>For complete dimensions, See page 94</b>
<b>Perimeter</b>	364 in. (924.6 cm)
<b>Dry Weight</b>	898 lbs (407 kg)
<b>Filled Weight (Spa Volume)</b>	5,446 lbs (2,470 kg)
<b>Filled Weight (Average Fill)</b>	4,612 lbs (2,092 kg)
<b>Water Capacity (Spa Volume)</b>	545 US gallons (2,063 Liters)
<b>Water Capacity (Average Fill)</b>	445 US gallons (1,685 Liters)
<b>Electronic Controls</b>	ProTouch™ Glass user interface. Touch-screen LCD displays temperature, time, cycles and jet control. Offers customizing of filtration cycles, CLEARRAY® on demand, cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	49
<b>Seat A Jets</b>	6 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat B Jets</b>	6 PowerPro® FX Rotational, 2 PowerPro® FX Large Rotational
<b>Seat C Jets</b>	6 PowerPro® RX, 2 PowerPro® FX directional, 8 PowerPro® PX, 2 PowerPro® FX Large Rotational
<b>Seat D Jets</b>	2 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	3 PowerPro® MX, 2 PowerPro® NX2, 2 PowerPro® FX Rotational
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	Exterior corners lights, ProEdge™ interior lighting, two waterfall lights, one footwell light
<b>Synthetic Cabinet Colors</b>	Silverwood, Roasted Chestnut
<b>Acrylic Colors</b>	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b>	4
<b>Waterfalls</b>	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@2x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features</b>	Factory installed SmartTub™ Module
<b>Audio System (Optional)</b>	BLUEWAVE® Wireless Spa Stereo System with Aux 3.5 mm jack port and Bluetooth capability; 4 single driver speakers and a powered subwoofer



# Jacuzzi J-575

## Operation/Seat Depths

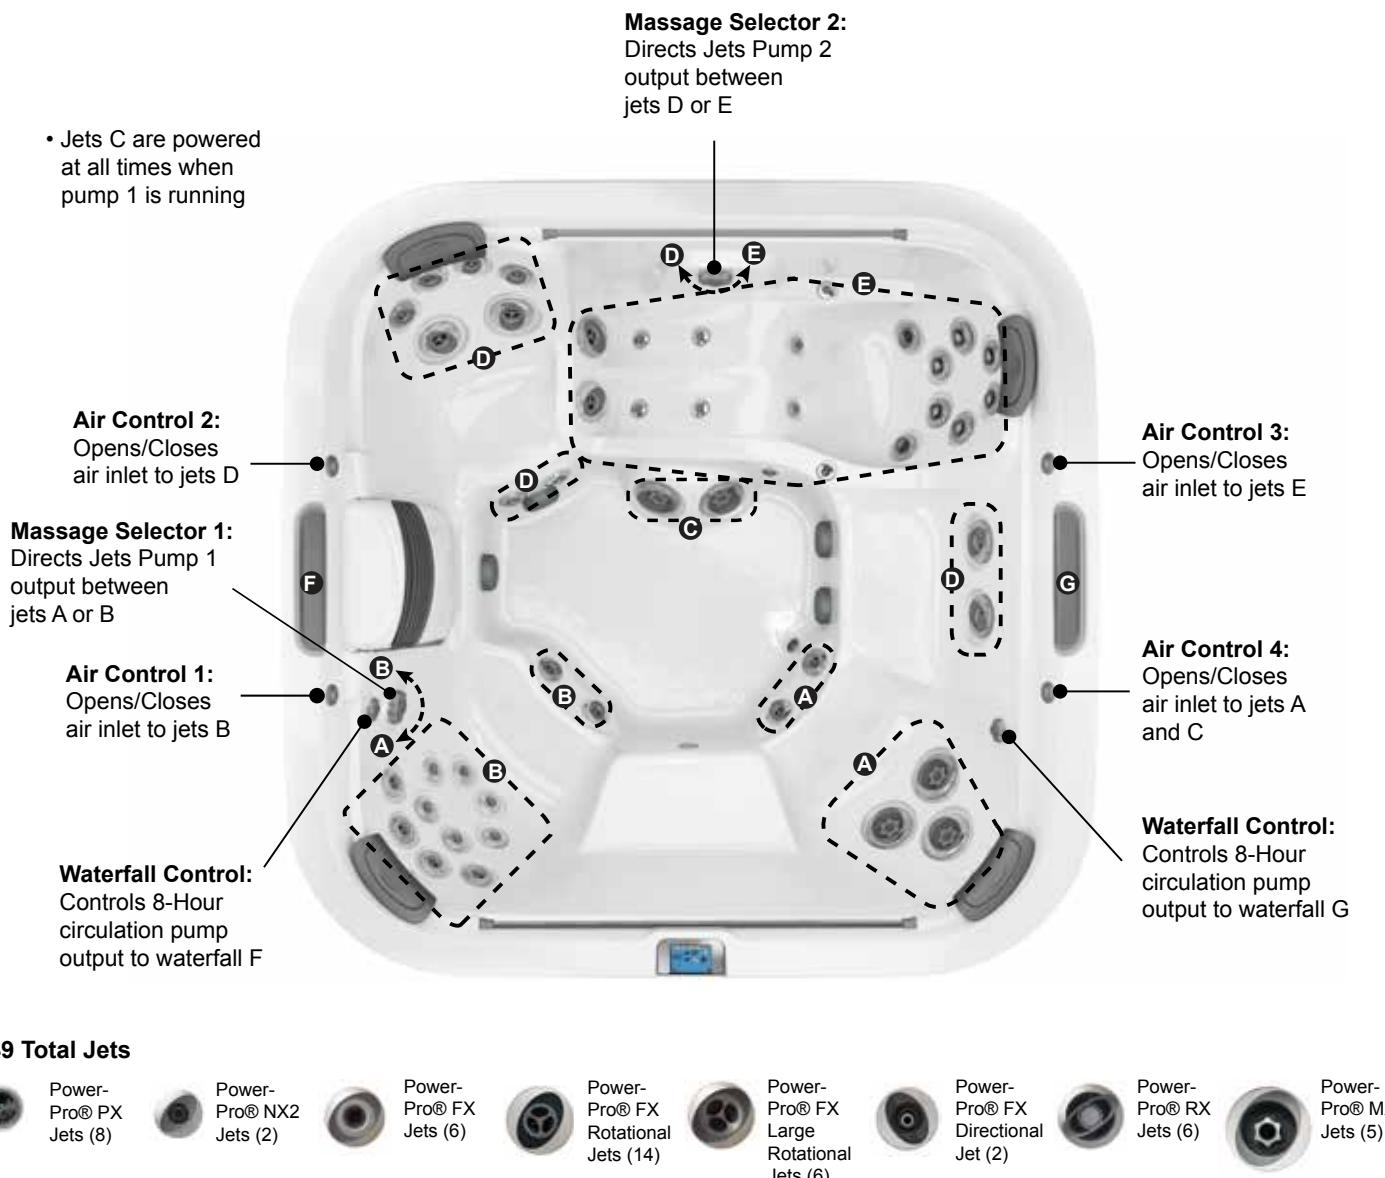


Spa Operation Subject to Change without Notice

**A = 27.50"** (69.85 cm)  
**B = 23.50"** (59.69 cm)  
**C = 27.00"** (68.58 cm)  
**D = 21.50"** (54.61 cm)  
**E = 24.75"** (62.87 cm)  
**F = 18.25"** (46.36 cm)

**G = 33.25"** (84.46 cm)  
**C1 = 17.75"** (45.09 cm)  
**C2 = 24.75"** (62.87 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

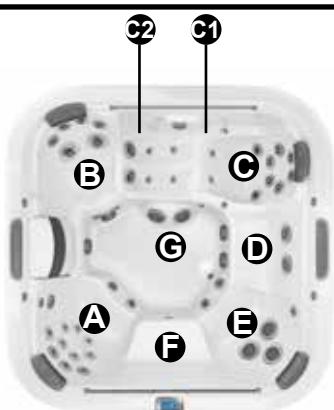

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-575


## Dimensions

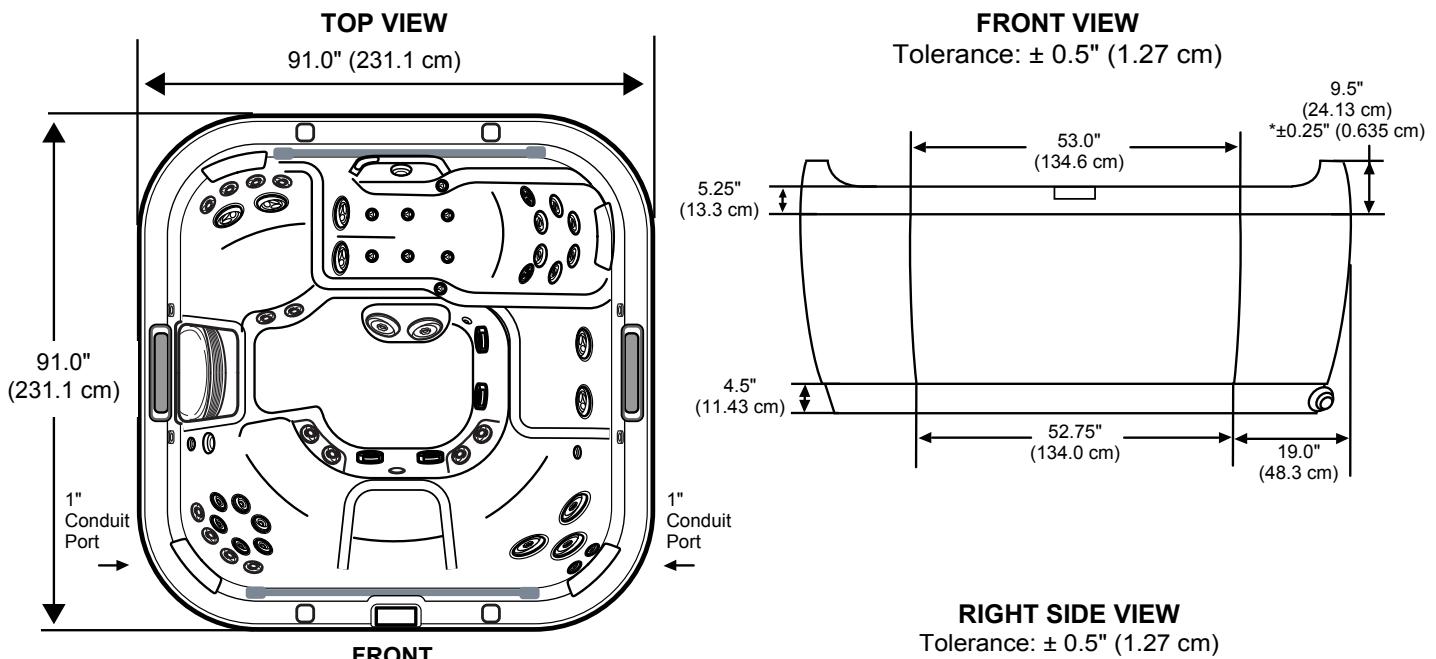


**FRONT**

Behind the cabinet  
Equipment Bay/Pump Access  
(Location of Controller, CLEARRAY,  
QuickDrain, SmartTub system and  
Optional BLUEWAVE)

**RIGHT SIDE VIEW**  
Tolerance:  $\pm 0.5"$  (1.27 cm)

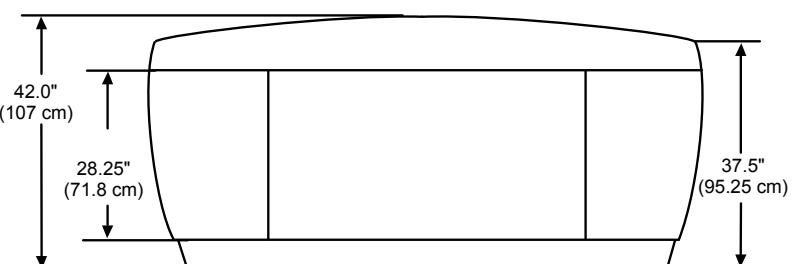

**IMPORTANT!** Always measure  
each hot tub for exact dimensions  
BEFORE designing its foundational  
support and/or decking.

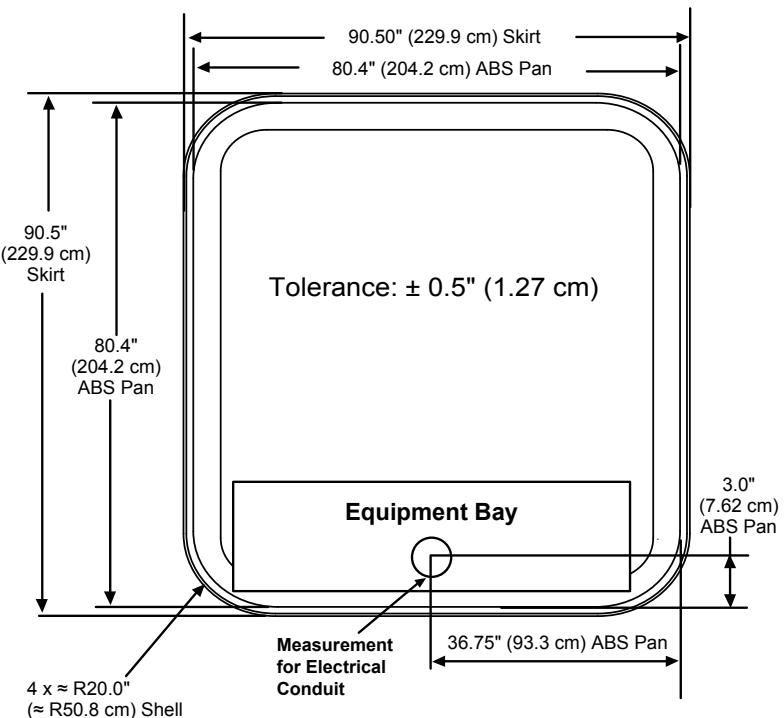

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)


# Jacuzzi J-495

## Specifications

<b>Seating Capacity</b>	8-9 Adults
<b>Dimensions</b>	91" x 110" x 38.5" Front/45.5" Back, (231.1 cm x 279.4 cm x 97.79 cm Front/115.57 cm Back); <b>For complete dimensions, See page 95</b>
<b>Perimeter</b>	402 in. (1021.1 cm)
<b>Dry Weight</b>	1,091 lbs (495 kg)
<b>Filled Weight (Spa Volume)</b>	6,679 lbs (3,030 kg)
<b>Filled Weight (Average Fill)</b>	5,261 lbs (2,386 kg)
<b>Water Capacity (Spa Volume)</b>	670 US gallons (2,536 Liters)
<b>Water Capacity (Average Fill)</b>	500 US gallons (1,893 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 3</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	71
<b>Seat A Jets</b>	2 PowerPro® NX2, 2 PowerPro® FX, 5 PowerPro® RX
<b>Seat B Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat C Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® FX Directional, 2 PowerPro® PX, 4 PowerPro® FX
<b>Seat D Jets</b>	2 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX, 2 PowerPro® FX Directional
<b>Seat F Jets</b>	4 PowerPro® FX, 4 PowerPro® RX
<b>Seat G Jet</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Footwell (H)</b>	14 PowerPro® FX Small
<b>Massage Selectors</b>	2
<b>Air Controls</b>	5
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARARRAY® Active Oxygen System <b>Export (50 Hz):</b> <b>Factory installed CLEARARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl (Gypsum), Sahara, Midnight, Monaco, Porcelain
<b>Headrests</b>	4
<b>Waterfalls</b>	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@50A or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x40A, 1x32A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

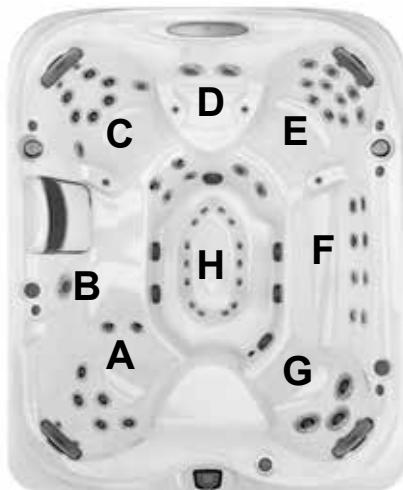

# Jacuzzi J-495

## Operation/Seat Depths

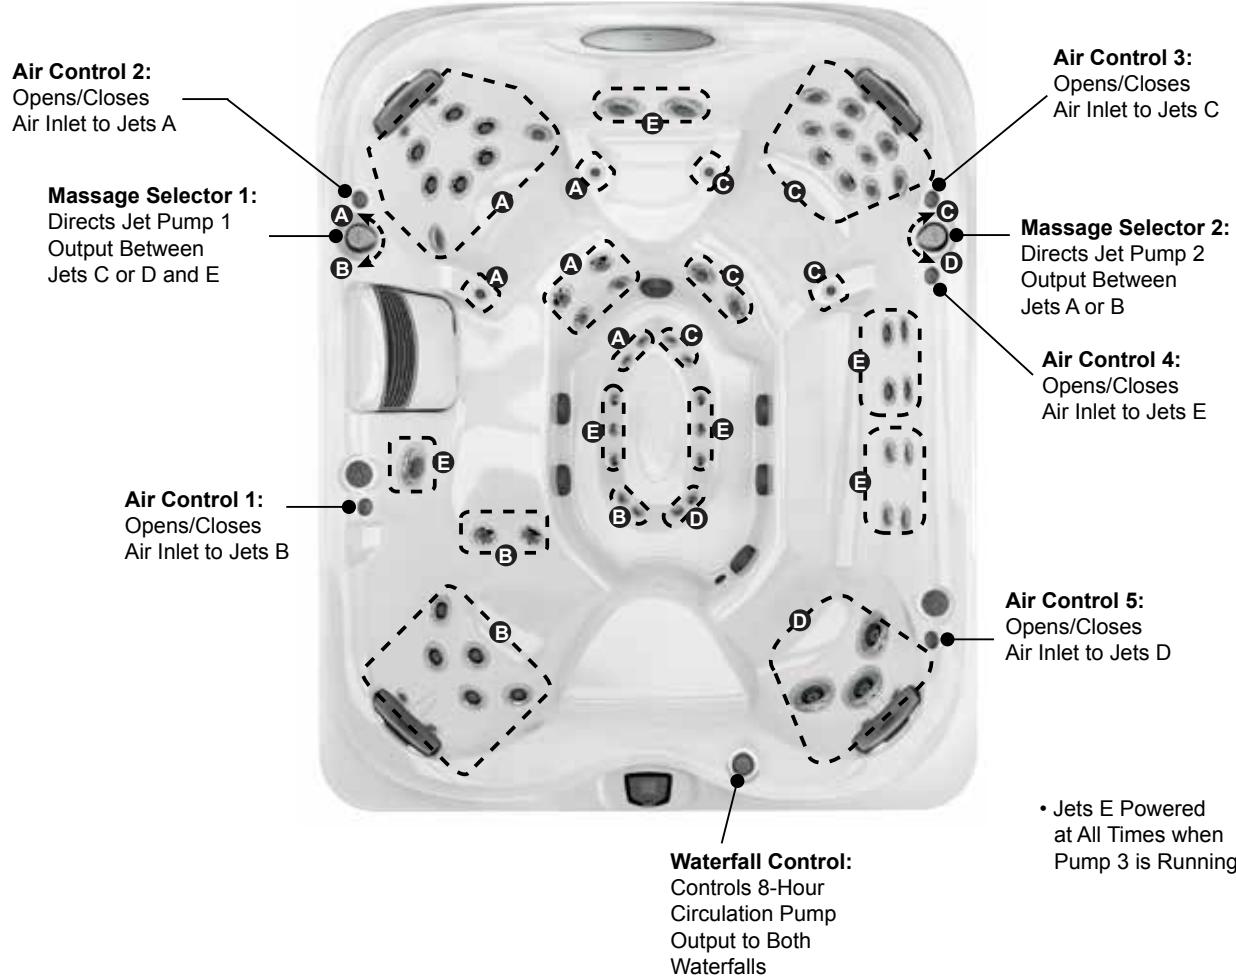

**71 Total Jets**





Spa Operation Subject to Change without Notice

## Seat Depths

**A = 27.75" (70.49 cm)**  
**B = 18.75" (47.63 cm)**  
**C = 29.00" (73.66 cm)**  
**D = 19.00" (73.03 cm)**  
**E = 27.00" (68.58 cm)**  
**F = 23.00" (58.42 cm)**

**G = 25.50" (64.77 cm)**  
**H = 17.75" (45.09 cm)**  
**I = 30.75" (78.11 cm)**  
**J = 33.00" (83.82 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

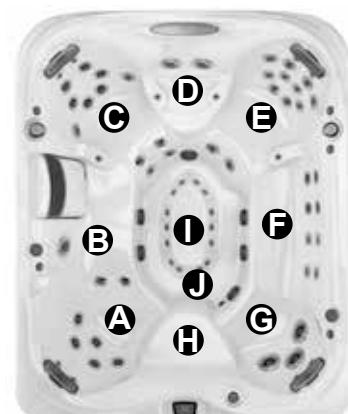

Dimensions/Specifications are Subject to Change Without Notice



# Jacuzzi J-495

## Dimensions

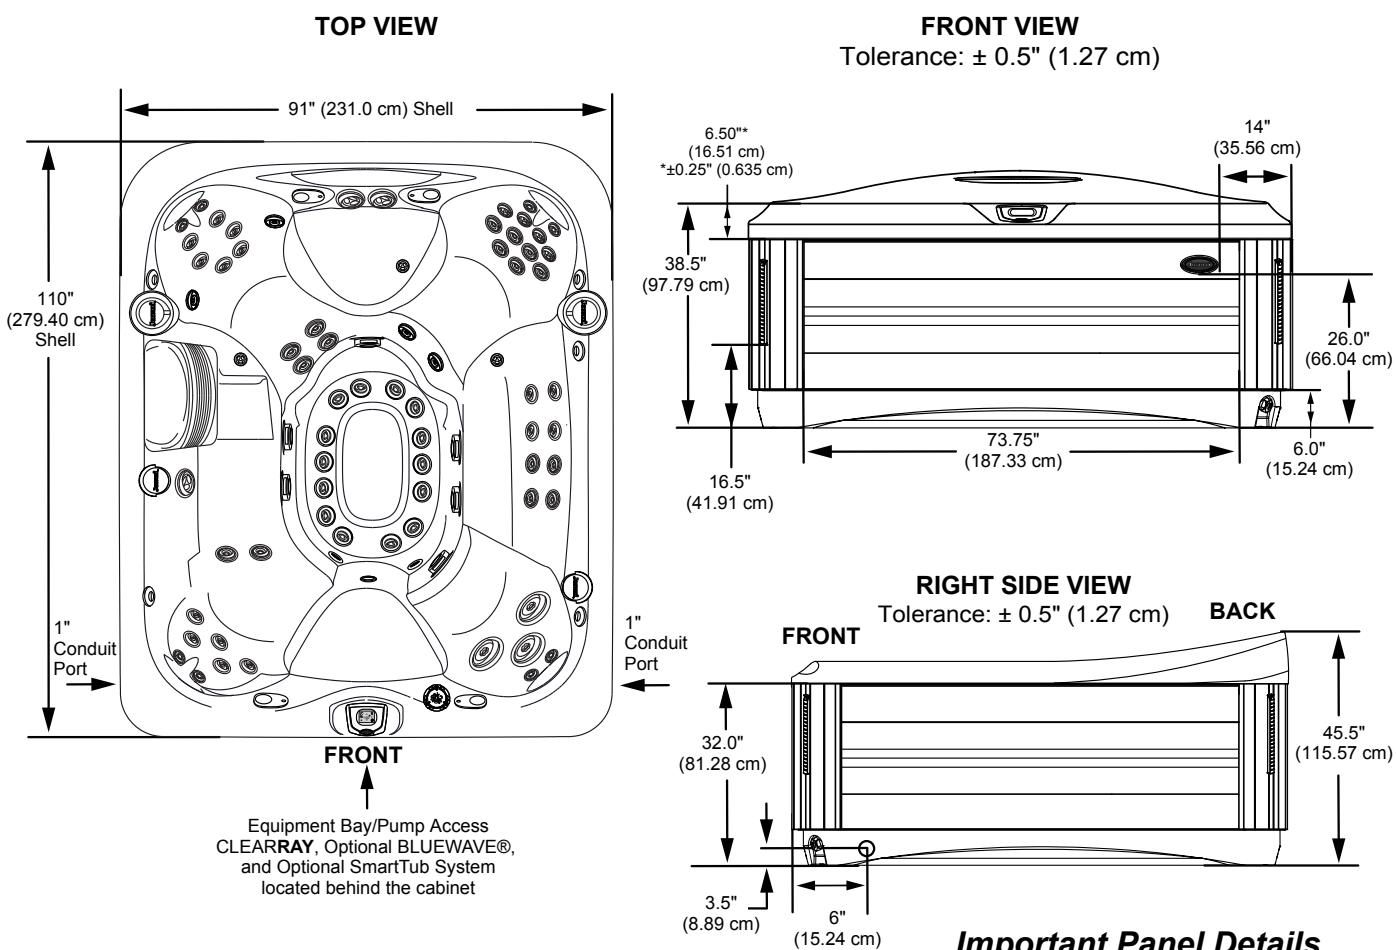

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

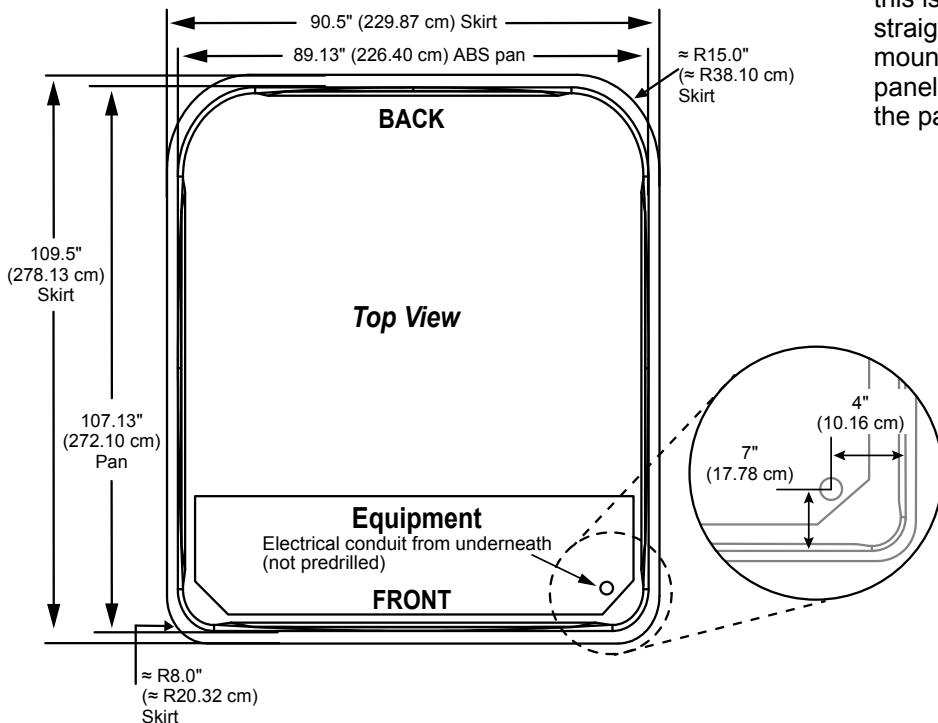

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)


# Jacuzzi J-485

## Specifications

<b>Seating Capacity</b>	..... 6-7 Adults
<b>Dimensions</b>	..... 91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); <b>For complete dimensions, See page 95</b>
<b>Perimeter</b>	..... 364 in. (924.6 cm)
<b>Dry Weight</b>	..... 916 lbs (415 kg)
<b>Filled Weight (Average Fill)</b>	..... 4,544 lbs (2,061 kg)
<b>Water Capacity (Average Fill)</b>	..... 435 US gallons (1,647 Liters)
<b>Filled Weight (Spa Volume)</b>	..... 5,336 lbs (2,421 kg)
<b>Water Capacity (Spa Volume)</b>	..... 530 US gallons (2,006 Liters)
<b>Electronic Controls</b>	..... ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	..... Yes, 8-Hour
<b>Total PowerPro® Jets</b>	..... 49
<b>Seat A Jets</b>	..... 2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	..... 2 PowerPro® NX2, 6 PowerPro® RX
<b>Seat C Jets</b>	..... 2 PowerPro® FX Large
<b>Seat D Jets</b>	..... 2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX, 2 PowerPro® PX
<b>Seat E Jets</b>	..... 2 PowerPro® RX, 2 PowerPro® FX
<b>Seat F Jets</b>	..... 4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	..... 8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b>	..... 2
<b>Air Controls</b>	..... 4, On/Off rocker switch air controller
<b>Water Management System</b>	..... One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	..... Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	..... Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl (Gypsum), Midnight, Monaco, Porcelain, Sahara, Sandstone
<b>Headrests</b>	..... 4
<b>Waterfall</b>	..... One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	..... North America (60 Hz): 240 VAC@40A, 50A, or 60A Export (50 Hz): <b>230-240 VAC@ 1x32A, 1x20A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; Export (50 Hz): <b>10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	..... SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b>	..... BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

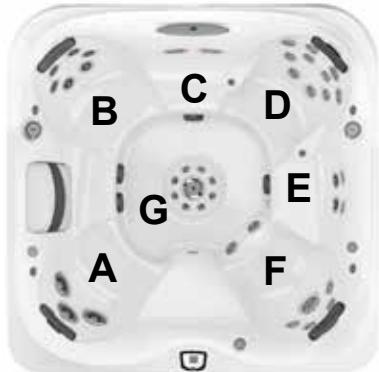

# Jacuzzi J-485

## Operation/Seat Depths

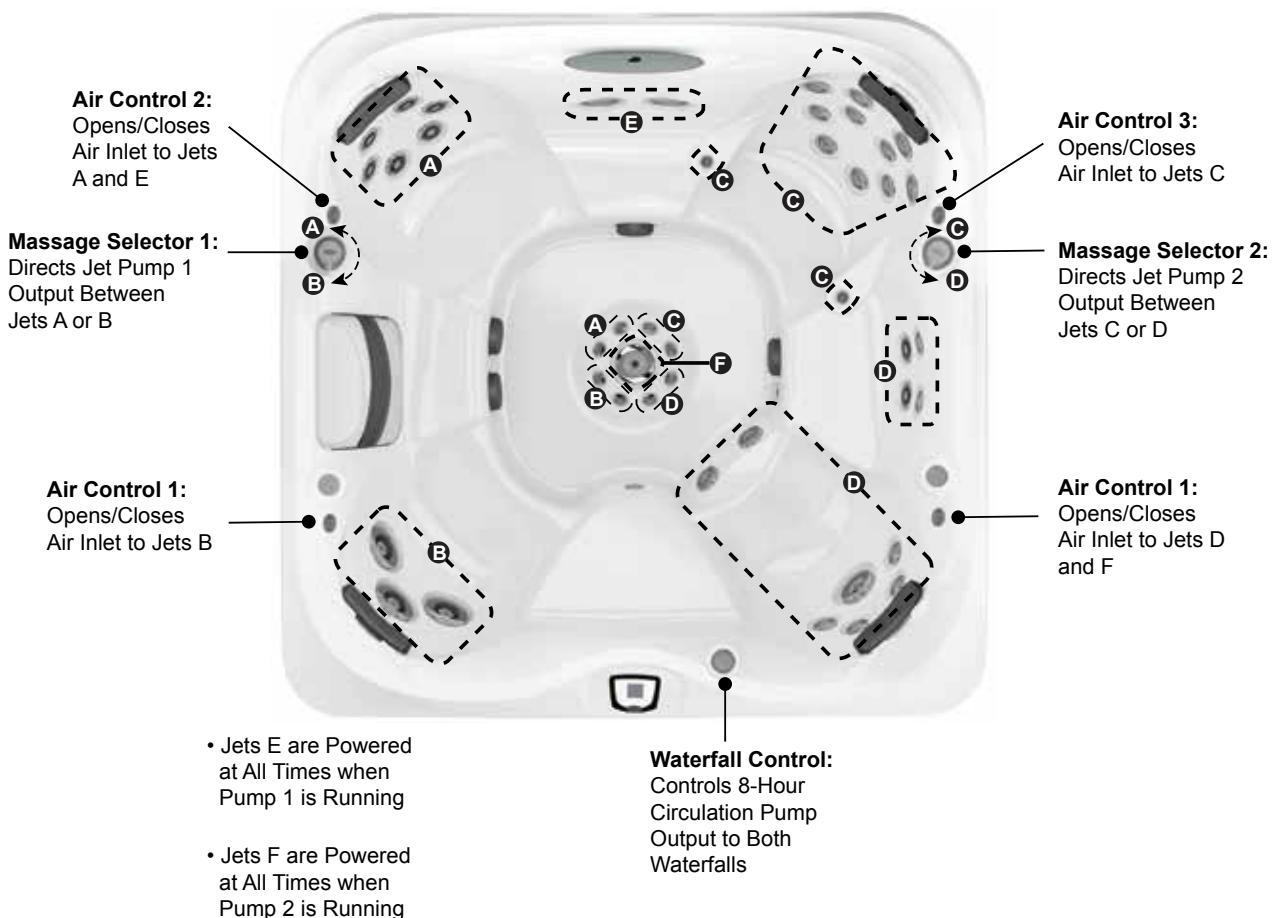

### 49 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.14 cm)**  
**B = 23.00" (58.42 cm)**  
**C = 29.50" (74.93 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 29.25" (74.30 cm)**  
**F = 21.00" (53.34 cm)**

**G = 27.38" (69.55 cm)**  
**H = 17.25" (43.82 cm)**  
**I = 32.50" (82.55 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-485


## Dimensions

**TOP VIEW**

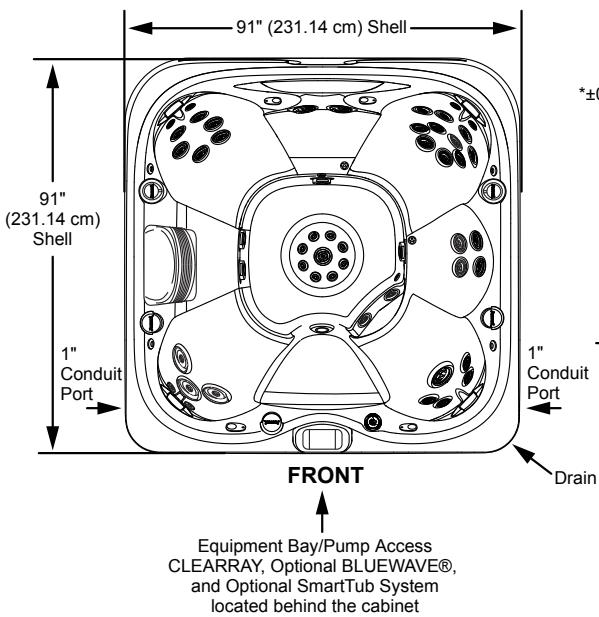

**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

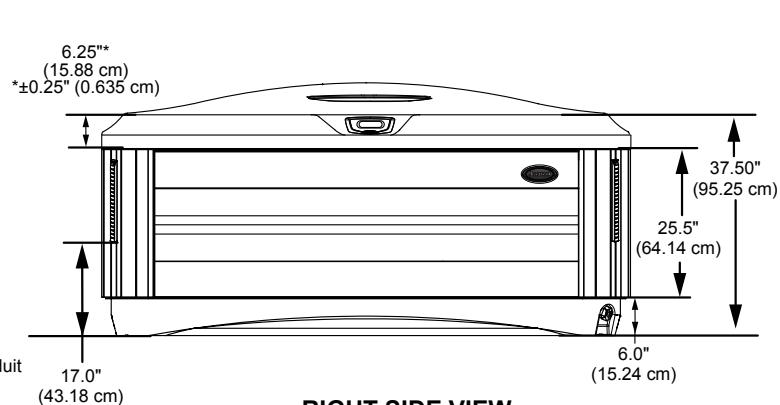


**RIGHT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

**FRONT**

**BACK**

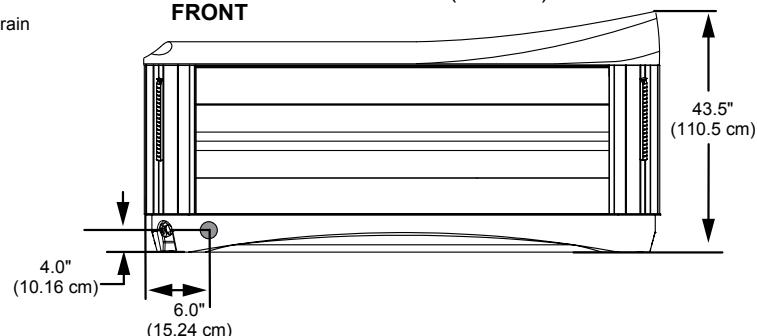


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

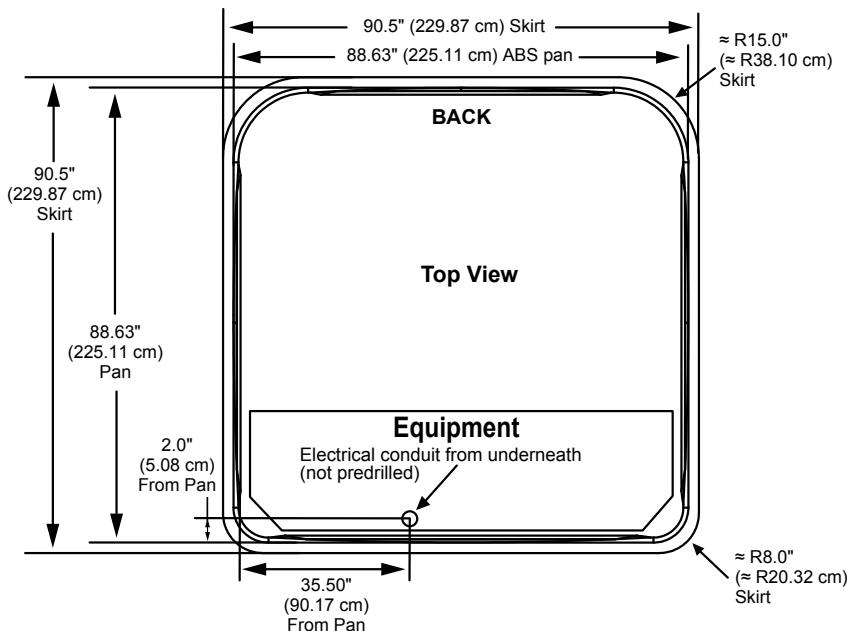


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-475


## Specifications

<b>Seating Capacity</b>	6-7 Adults
<b>Dimensions</b>	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.49 cm Back); <b>For Complete Dimensions, See page 95</b>
<b>Perimeter</b>	364 in. (924.6 cm)
<b>Dry Weight</b>	925 lbs (419.5 kg)
<b>Filled Weight (Average Fill)</b>	4,595 lbs (2,084 kg)
<b>Water Capacity (Average Fill)</b>	440 US gallons (1,666 Liters)
<b>Filled Weight (Spa Volume)</b>	5,387 lbs (2,444 kg)
<b>Water Capacity (Spa Volume)</b>	535 US gallons (2,025 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	55
<b>Seat A Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Seat B Jets</b>	2 PowerPro® NX2, 6 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat C Jets</b>	2 PowerPro® FX Large
<b>Seat D Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX, 8 PowerPro® PX, 2 PowerPro® FX Large
<b>Seat E Jet</b>	4 PowerPro® FX, 1 PowerPro® FX Large Rotational
<b>Footwell (F)</b>	8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4, On/Off rocker switch air controller
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	Waterfall light, massage selectors, cupholders, underwater, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b>	4
<b>Waterfall</b>	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer

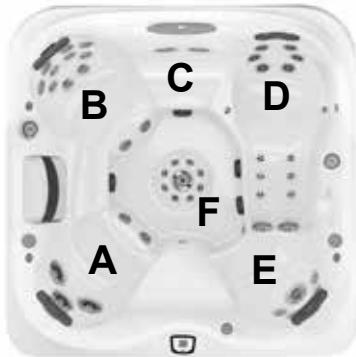

# Jacuzzi J-475

## Operation/Seat Depths

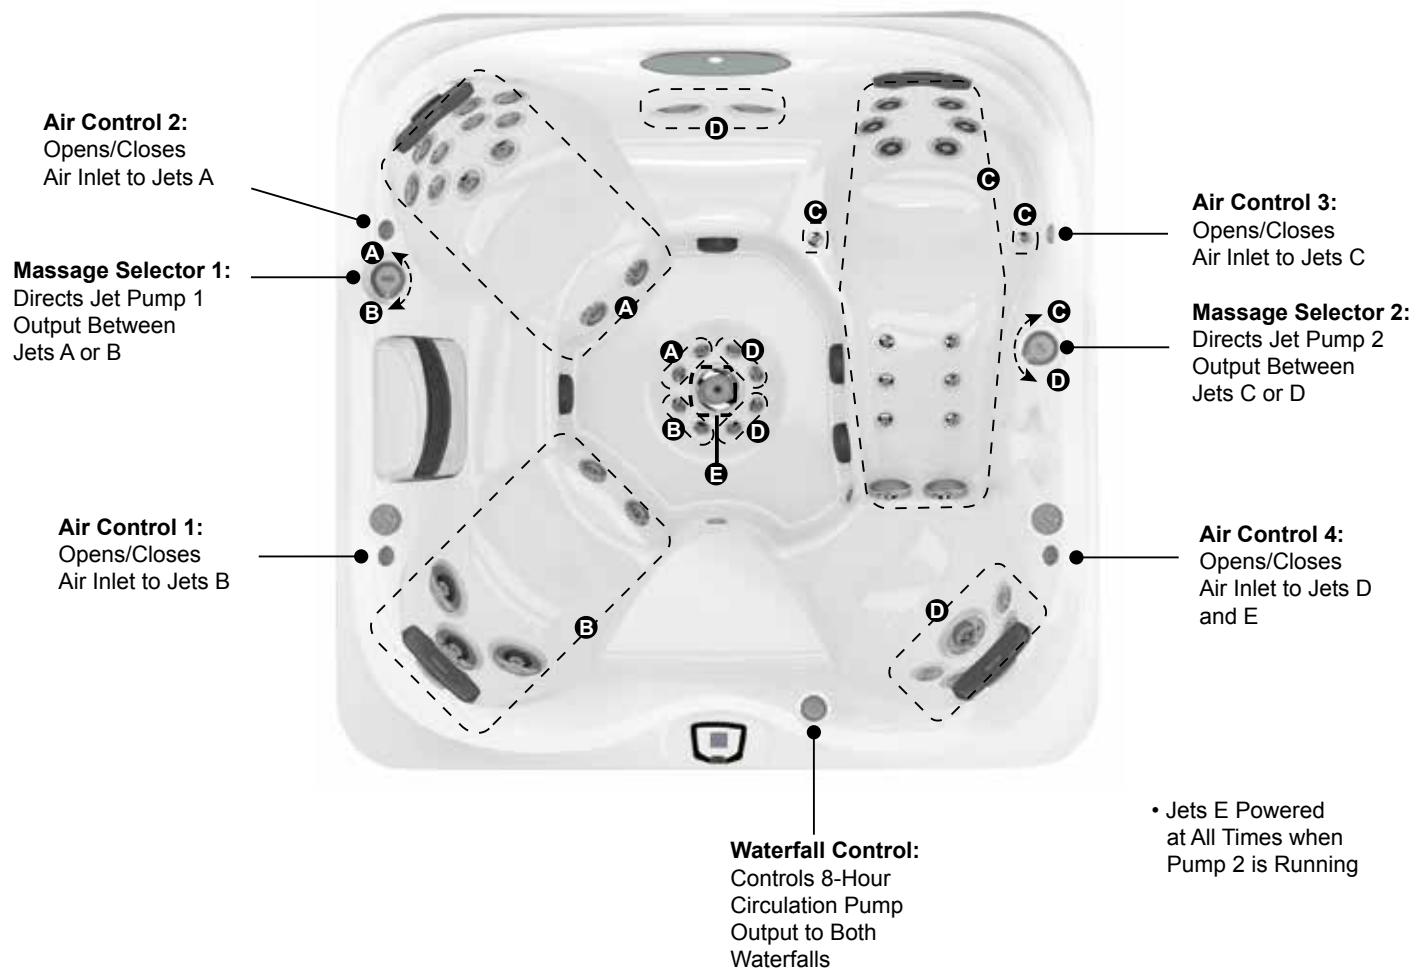

### 55 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.14 cm)**

**B = 23.00" (58.42 cm)**

**C = 29.50" (74.93 cm)**

**D = 23.25" (59.06 cm)**

**E = 29.25" (74.30 cm)**


**F = 25.25" (64.14 cm)**

**G = 17.25" (43.82 cm)**

**H = 32.50" (82.55 cm)**


**I = 19.75" (50.17 cm)**

**J = 28.50" (72.39 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat.


**Tolerance ± 0.5"**  
**(1.27 cm).**

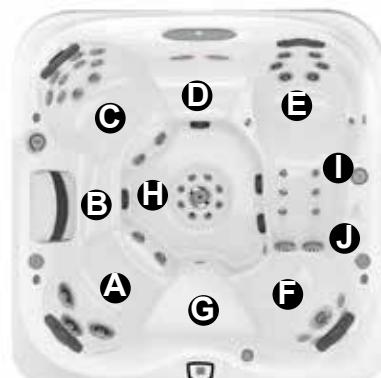

Dimensions/Specifications are Subject to Change Without Notice



# Jacuzzi J-475

## Dimensions

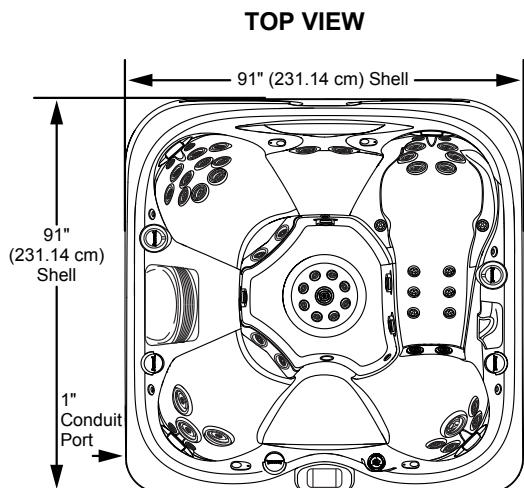

FRONT

Equipment Bay/Pump Access  
CLEARARRAY, Optional BLUEWAVE®,  
and Optional SmartTub System  
located behind the cabinet

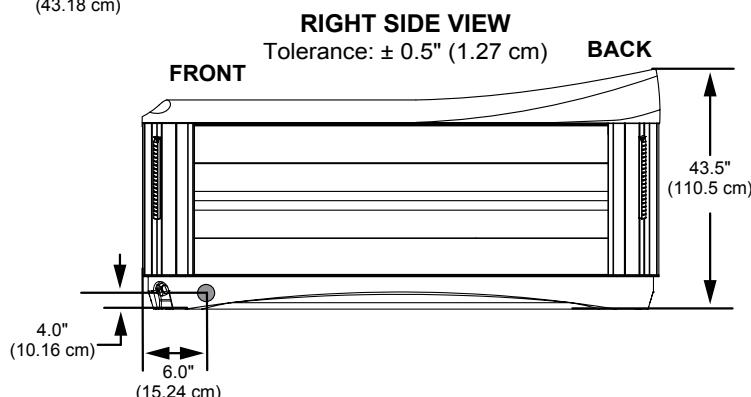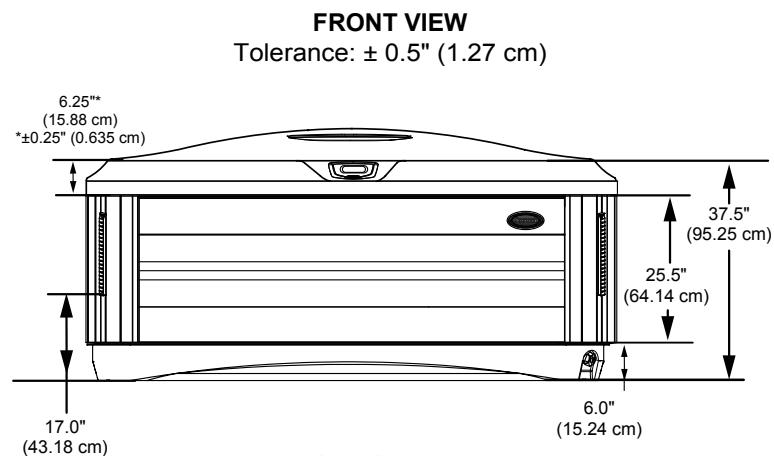


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

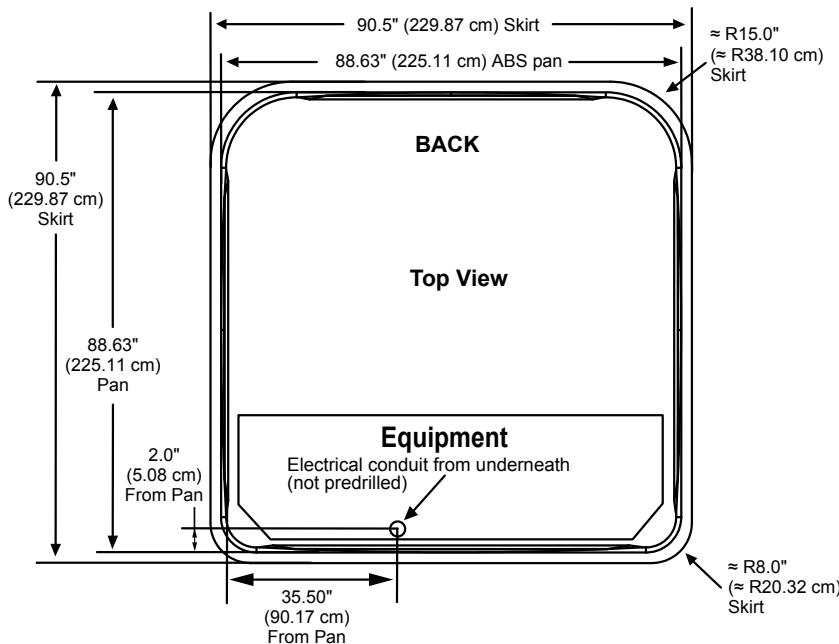


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-445


## Specifications

<b>Seating Capacity</b>	..... 6 Adults
<b>Dimensions</b>	..... 84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 95</b>
<b>Perimeter</b>	..... 336 in. (853.4 cm)
<b>Dry Weight</b>	..... 855 lbs (388 kg)
<b>Filled Weight (Average Fill)</b>	..... 4,024 lbs (1,825 kg)
<b>Water Capacity (Average Fill)</b>	..... 380 US gallons (1,438 Liters)
<b>Filled Weight (Spa Volume)</b>	..... 4,525 lbs (2,052 kg)
<b>Water Capacity (Spa Volume)</b>	..... 440 US gallons (1,666 Liters)
<b>Electronic Controls</b>	..... ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	..... Yes, 8-Hour
<b>Total PowerPro® Jets</b>	..... 45
<b>Seat A Jets</b>	..... 2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	..... 2 PowerPro® RX
<b>Seat C Jets</b>	..... 2 PowerPro® FX, 6 PowerPro® RX, 2 PowerPro® FX Rotational
<b>Seat D Jets</b>	..... 1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	..... 2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat F Jets</b>	..... 4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	..... 8 PowerPro® FX Small
<b>Massage Selectors</b>	..... 2
<b>Air Controls</b>	..... 4, On/Off rocker switch air controller
<b>Water Management System</b>	..... One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	..... One waterfall with light, one underwater light, cupholders, massage selector lights, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	..... Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl, Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b>	..... 4
<b>Waterfall</b>	..... One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	..... North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	..... SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b>	..... BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer



# Jacuzzi J-445

## Operation/Seat Depths

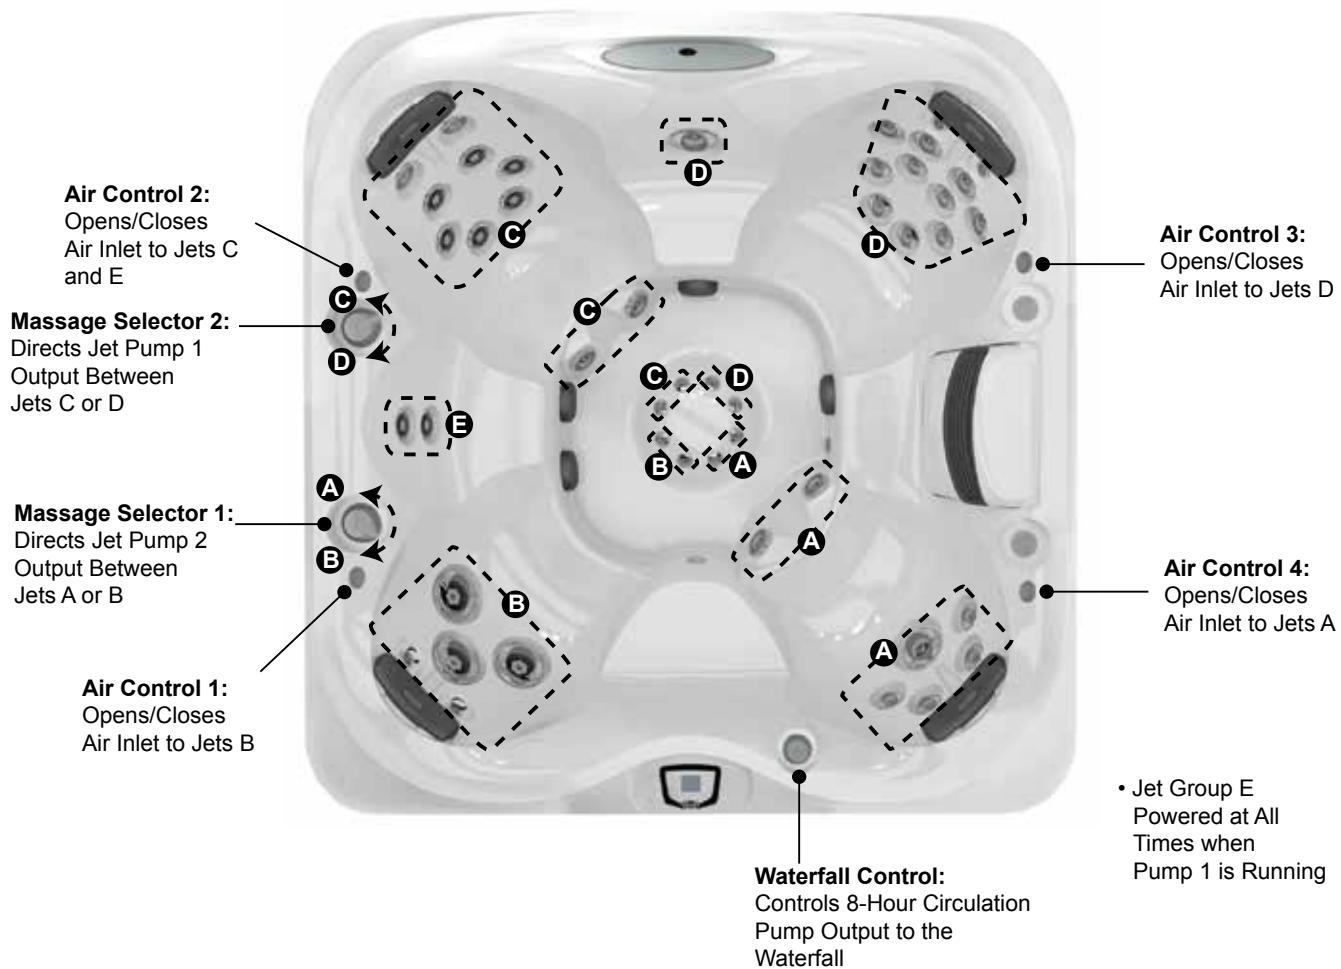


**45 Total Jets**



Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.50" (64.77 cm)**
- B = 21.00" (53.34 cm)**
- C = 30.00" (76.20 cm)**
- D = 23.00" (58.42 cm)**
- E = 29.00" (73.66 cm)**
- F = 23.00" (58.42 cm)**



- G = 25.50" (64.77 cm)**
- H = 18.00" (45.72 cm)**
- I = 34.00" (86.36 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-445

## Dimensions

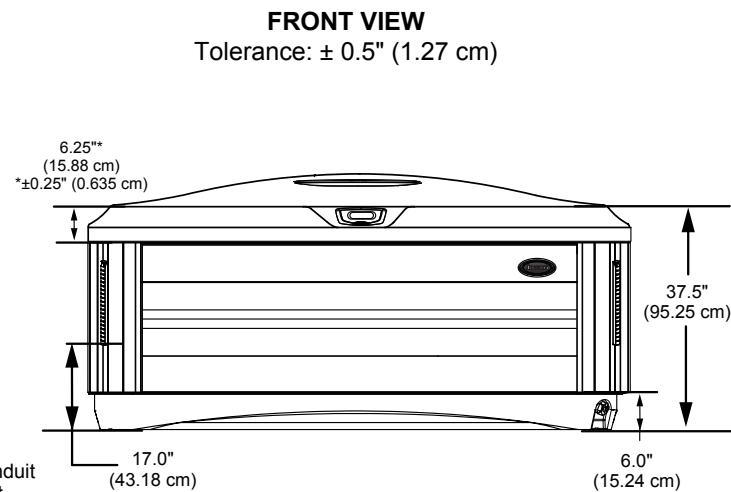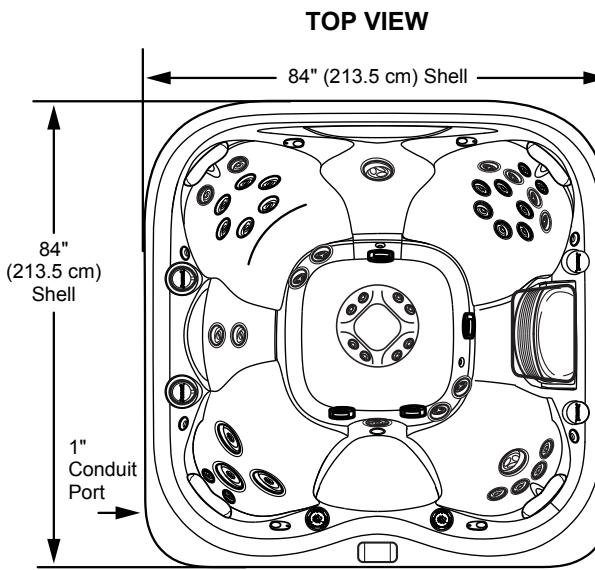



Equipment Bay/Pump Access  
**CLEARRAY**, Optional **BLUEWAVE®**,  
and Optional SmartTub System  
located behind the cabinet

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

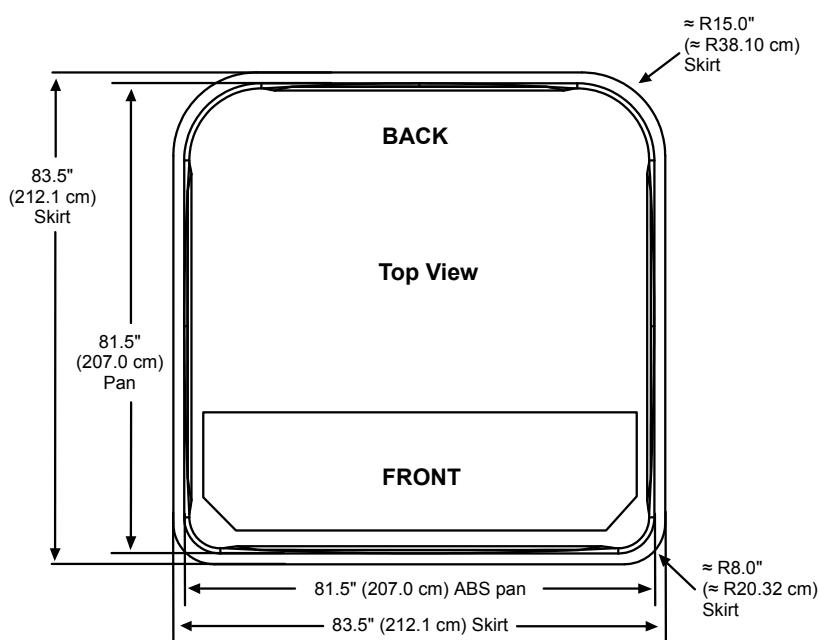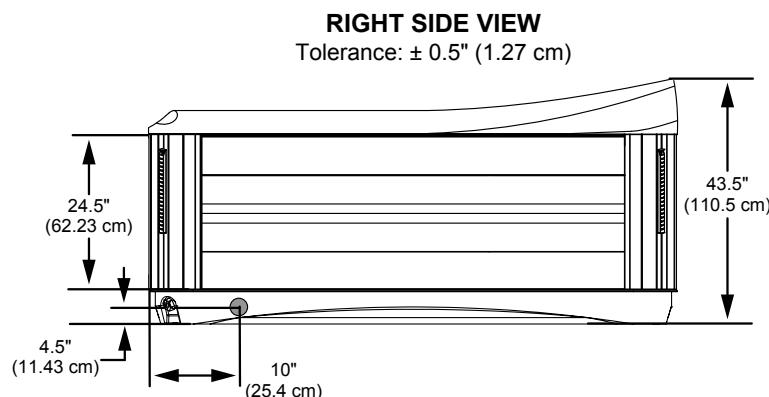

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-435


## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 95</b>
<b>Perimeter</b>	336 in. (853.4 cm)
<b>Dry Weight</b>	822 lbs (373 kg)
<b>Filled Weight (Average Fill)</b>	3,824 lbs (1,735 kg)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Filled Weight (Spa Volume)</b>	4,492 lbs (2,037 kg)
<b>Water Capacity (Spa Volume)</b>	440 US gallons (1,666 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	47
<b>Seat A Jets</b>	3 PowerPro® FX
<b>Seat B Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® PX, 6 PowerPro® FX Small, 2 PowerPro® FX Rotational
<b>Seat C Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat E Jets</b>	2 PowerPro® RX
<b>Seat F Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	4 PowerPro® FX Small
<b>Massage Selectors</b>	2
<b>Air Controls</b>	3, On/Off rocker switch air controller
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	One waterfall with light, one underwater light, cupholder, massage selector lights, indicator light, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	3
<b>Waterfall</b>	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@ 1x32A, 1x20A/1x16A, or 1x16A/1x16A/1x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer



# Jacuzzi J-435

## Operation/Seat Depths

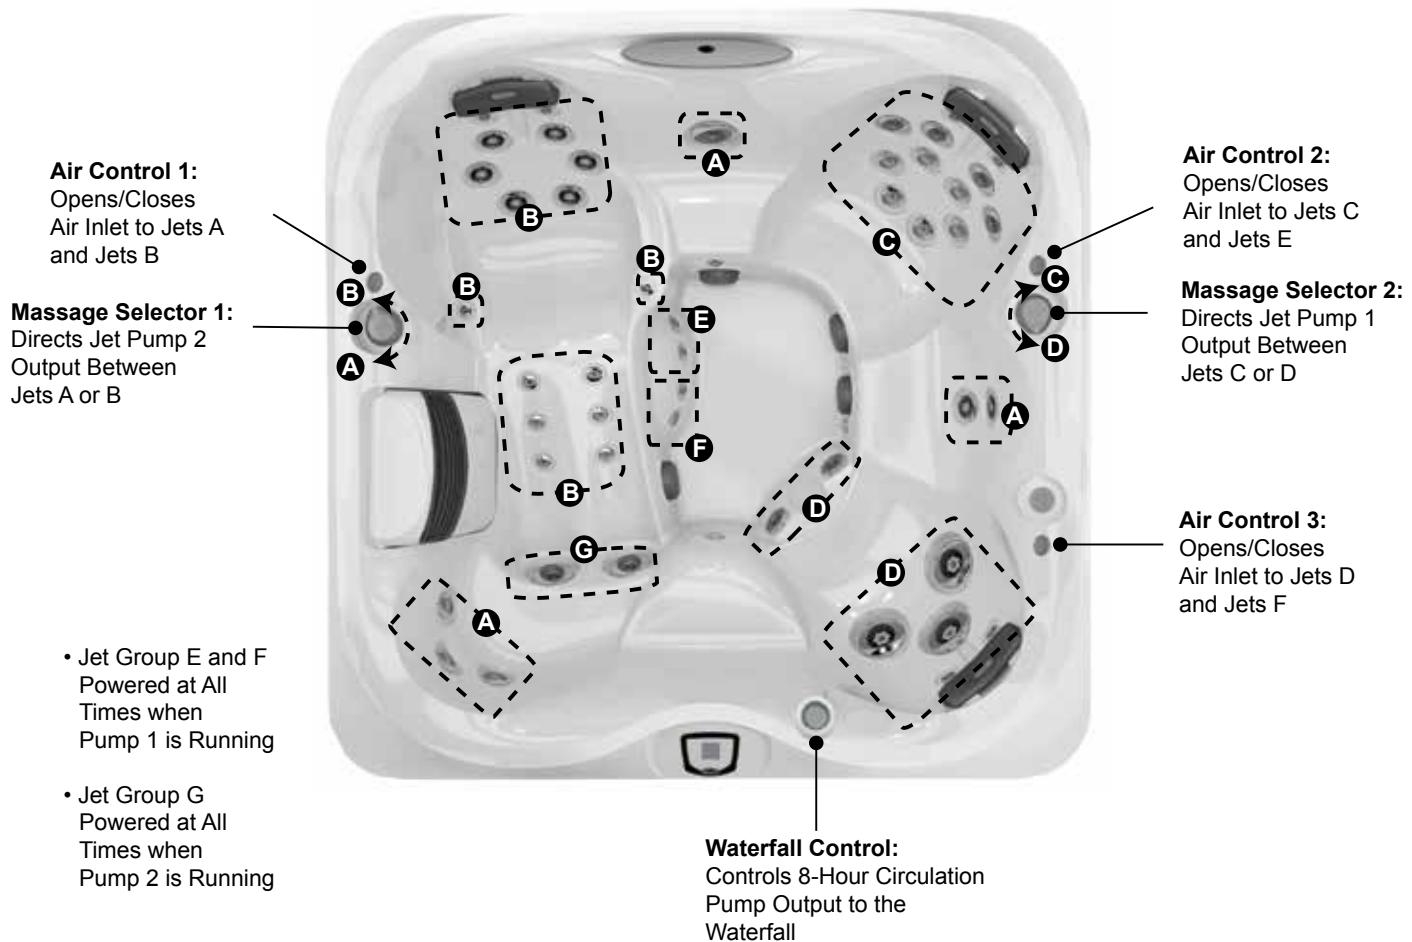

### 47 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 17.75" (45.09 cm)**  
**B = 27.75" (70.49 cm)**  
**C = 29.00" (73.66 cm)**  
**D = 23.00" (58.42 cm)**  
**E = 30.00" (76.20 cm)**  
**F = 23.50" (59.69 cm)**

**G = 25.50" (64.77 cm)**  
**H = 33.50" (85.09 cm)**  
**I = 20.50" (52.07 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-435

## Dimensions

**TOP VIEW**

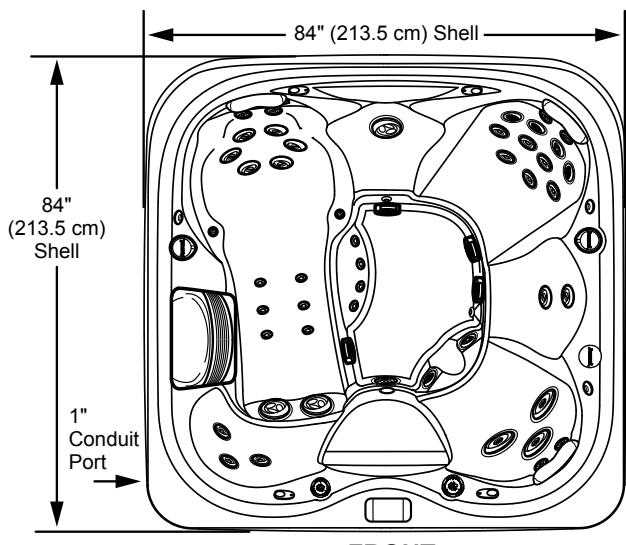


**FRONT**

Equipment Bay/Pump Access  
CLEARRAY, Optional BLUEWAVE®,  
and Optional SmartTub System  
located behind the cabinet


**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

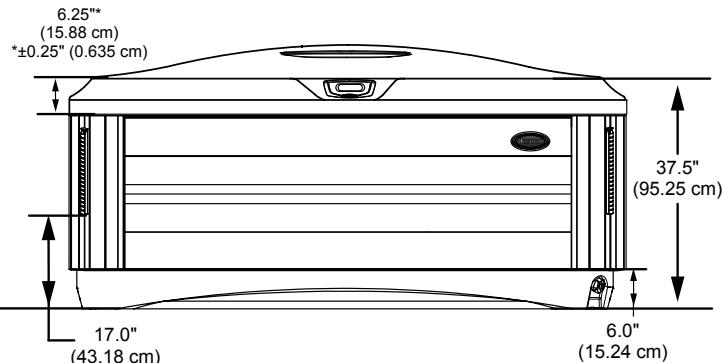

**RIGHT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

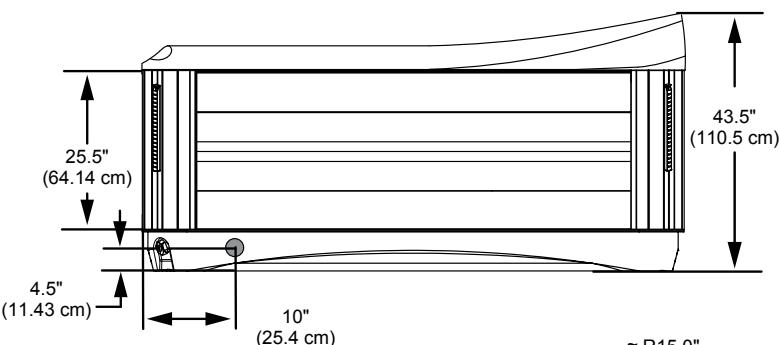


### **Important Panel Details**

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**IMPORTANT! Always  
measure each hot tub  
for exact dimensions  
BEFORE designing its  
foundational support  
and/or decking.**

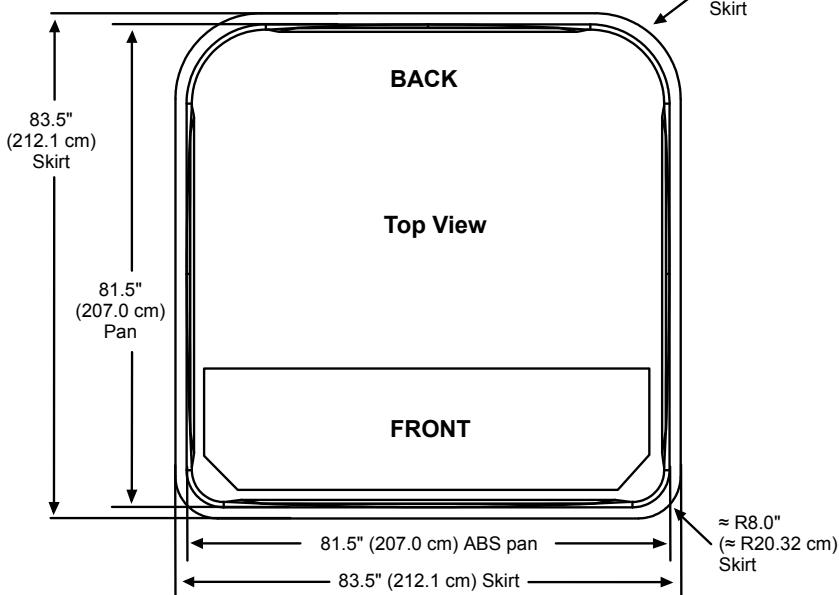

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# **Jacuzzi J-LXL**

## **Specifications**

---

**TBA**

# **Jacuzzi J-LXL**

## **Operation/Seat Depths**

**TBA**

# **Jacuzzi J-LXL**

## **Dimensions**

**TBA**

# **Jacuzzi J-LX**

## **Specifications**

**TBA**

# **Jacuzzi J-LX**

## **Operation/Seat Depths**

**TBA**

# **Jacuzzi J-LX**

## **Dimensions**

**TBA**

# **Jacuzzi J-LXS**

## **Specifications**

**TBA**

# **Jacuzzi J-LXS**

## **Operation/Seat Depths**

**TBA**

# **Jacuzzi J-LXS**

## **Dimensions**

**TBA**

# Jacuzzi J-385


## Specifications

<b>Seating Capacity</b>	.....6-7
<b>Dimensions</b>	.....91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); <b>For complete dimensions, see page 97</b>
<b>Perimeter</b>	.....364 in. (924.6 cm)
<b>Dry Weight</b>	.....850 lbs (386 kg)
<b>Filled Weight (Spa Volume)</b>	.....5,771 lbs (2,618 kg)
<b>Filled Weight (Average Fill)</b>	.....4,686 lbs (2,126 kg)
<b>Water Capacity (Spa Volume)</b>	.....590 US gallons (2,233 Liters)
<b>Water Capacity (Average Fill)</b>	.....460 US gallons (1,741 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz) 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....51
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....1 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Seat C Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX Rotational, 4 PowerPro® FX, 2 PowerPro® FX Large
<b>Seat D Jets</b>	.....2 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	.....10 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® BX
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® NX2, 3 PowerPro® MX
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker switch air controller
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Sahara, Desert, Monaco, Midnight, Porcelain
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and a subwoofer



# Jacuzzi J-385

## Operation/Seat Depths

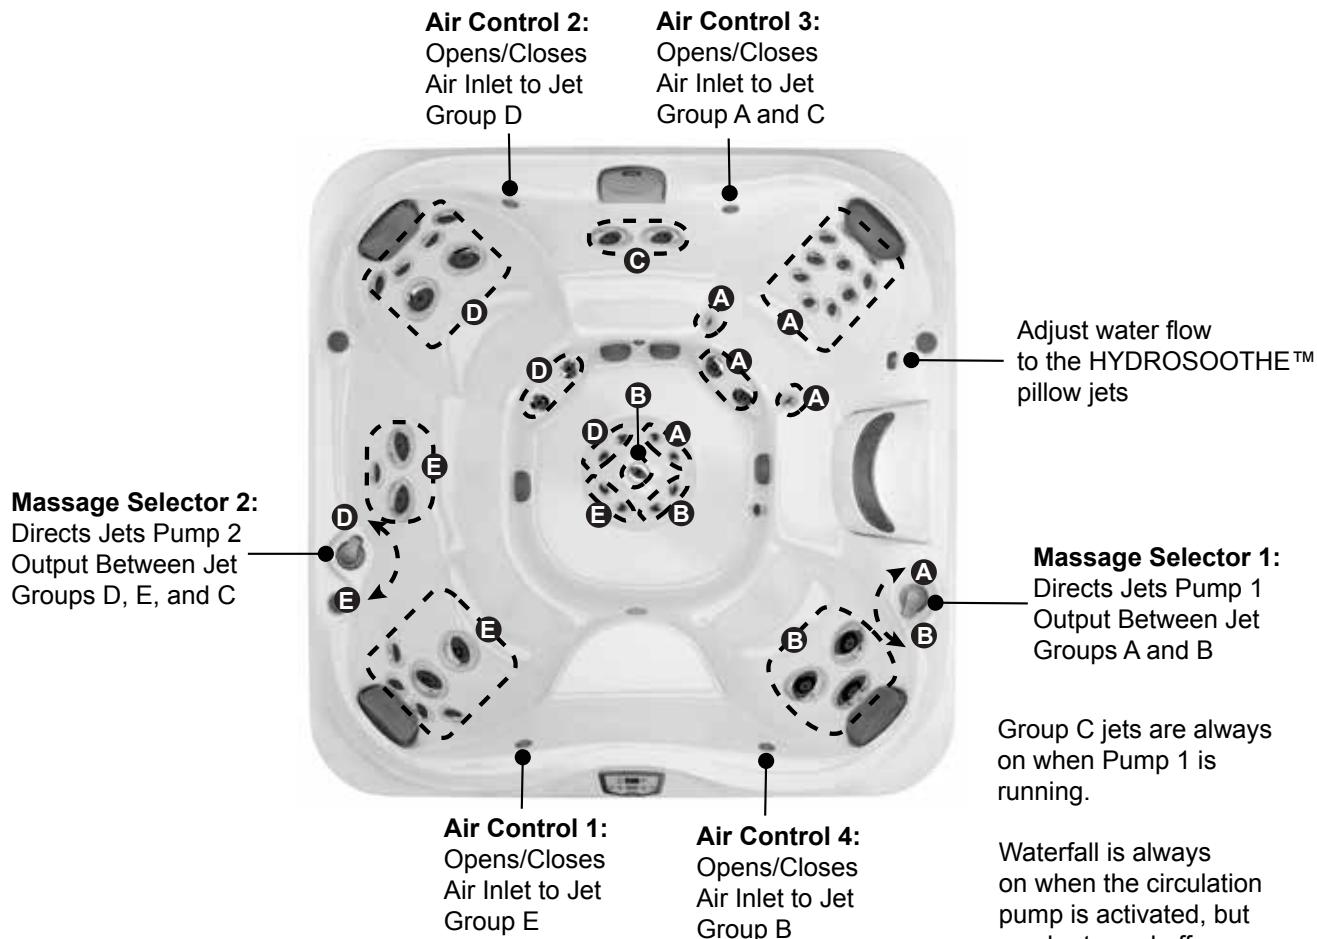

### 51 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 26.50" (67.31 cm)**  
**B = 25.00" (63.50 cm)**  
**C = 26.75" (67.95 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 28.25" (71.76 cm)**

**F = 27.13" (68.90 cm)**  
**G = 17.00" (43.18 cm)**  
**H = 33.25" (84.46 cm)**





Listed dimensions represent distance from top of acrylic to lowest point in seat.  
 Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-385


## Dimensions

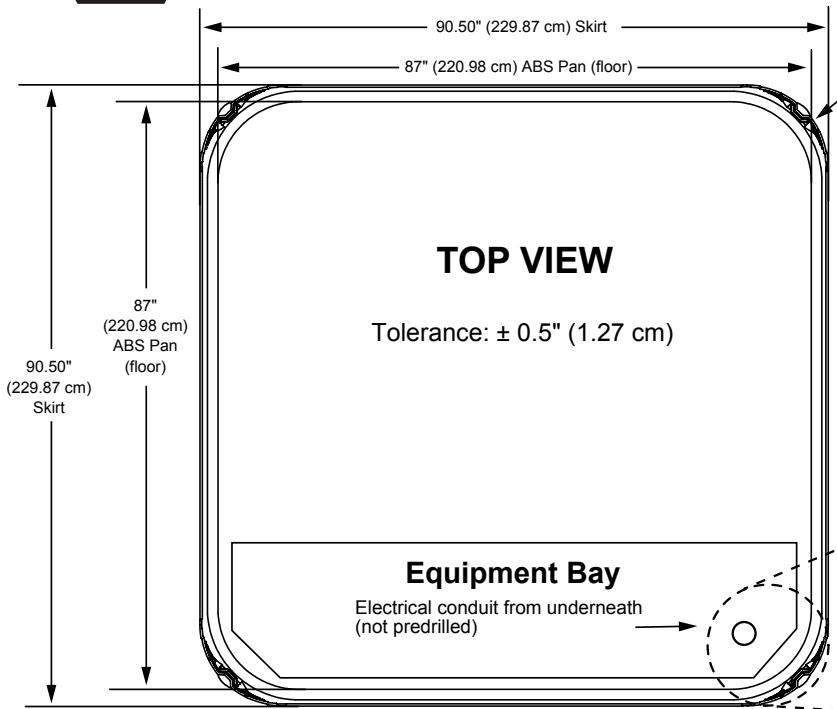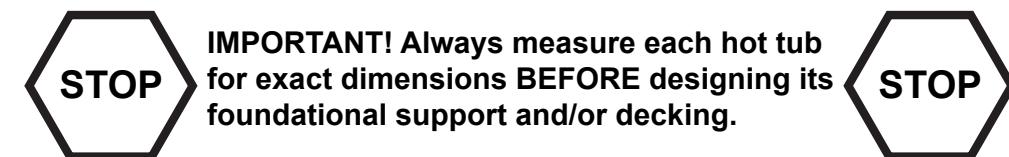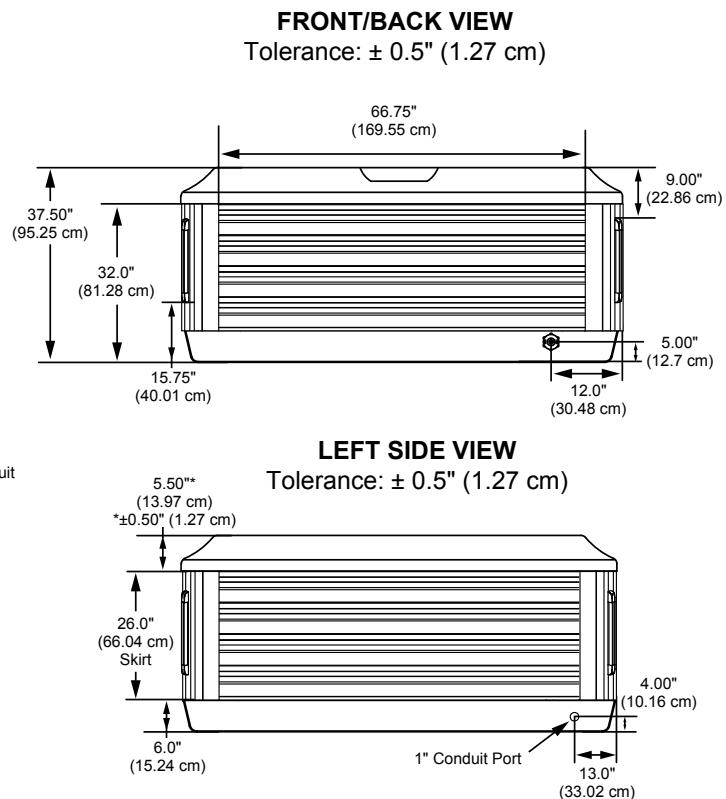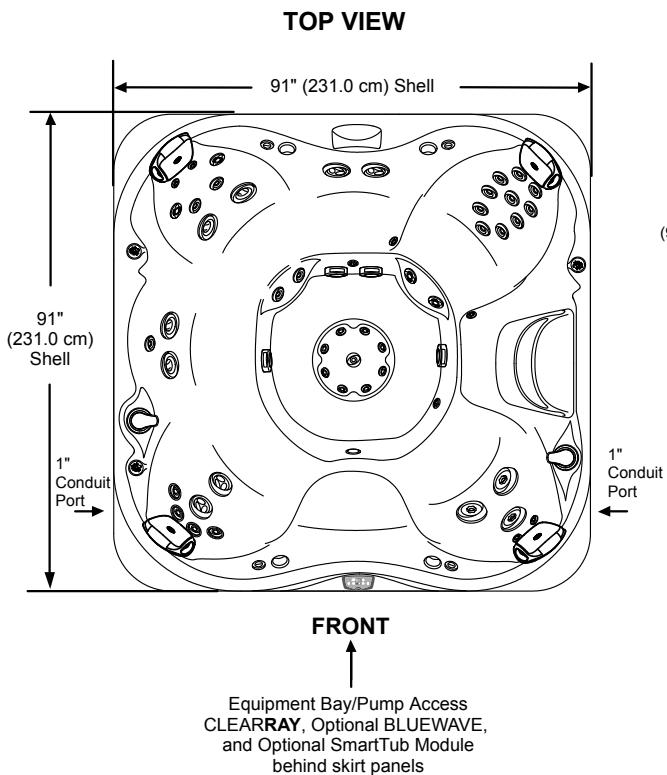

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the  
ABS pan




Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-375


## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); <b>For complete dimensions, see page 97</b>
<b>Perimeter</b>	364 in. (924.6 cm)
<b>Dry Weight</b>	830 lbs (376 kg)
<b>Filled Weight (Spa Volume)</b>	5,667 lbs (2,571 kg)
<b>Filled Weight (Average Fill)</b>	4,541 lbs (2,060 kg)
<b>Water Capacity (Spa Volume)</b>	580 US gallons (2,196 Liters)
<b>Water Capacity (Average Fill)</b>	445 US gallons (1,685 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater</b>	North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz): 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	52
<b>Seat A Jets</b>	2 PowerPro® NX2, 2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX
<b>Seat B Jets</b>	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
<b>Seat C Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b>	10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat D HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat E Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4, On/Off rocker switch air controller
<b>Water Management System</b>	Two 60 ft <sup>2</sup> Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	4
<b>Waterfalls</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



# Jacuzzi J-375

## Operation/Seat Depths

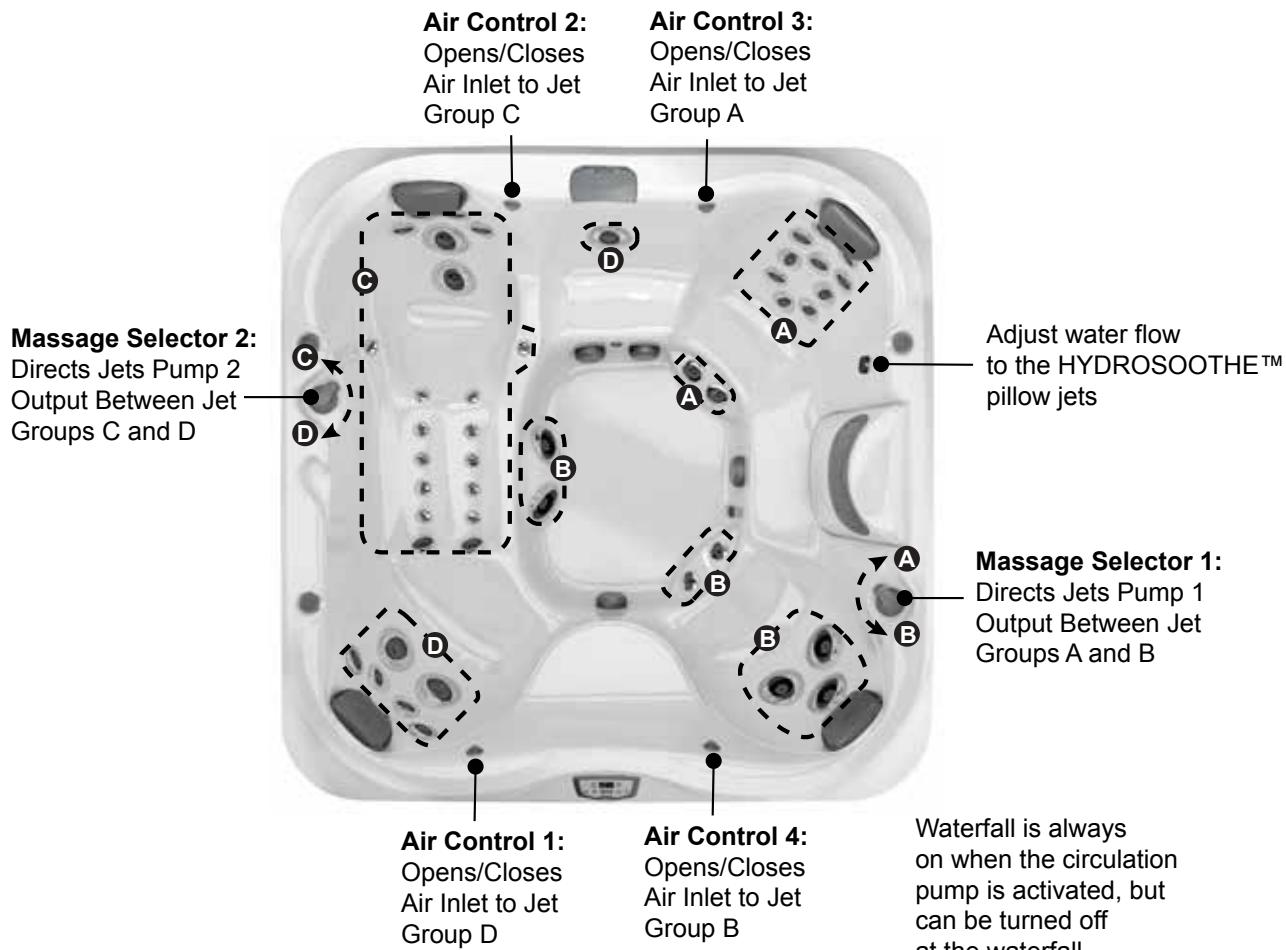

52 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 26.50" (67.31 cm)**

**B = 27.50" (69.85 cm)**

**C = 23.50" (59.69 cm)**

**D = 28.25" (71.76 cm)**

**E = 27.25" (69.22 cm)**

**F = 17.00" (43.18 cm)**

**G = 34.00" (86.36 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-375

## Dimensions

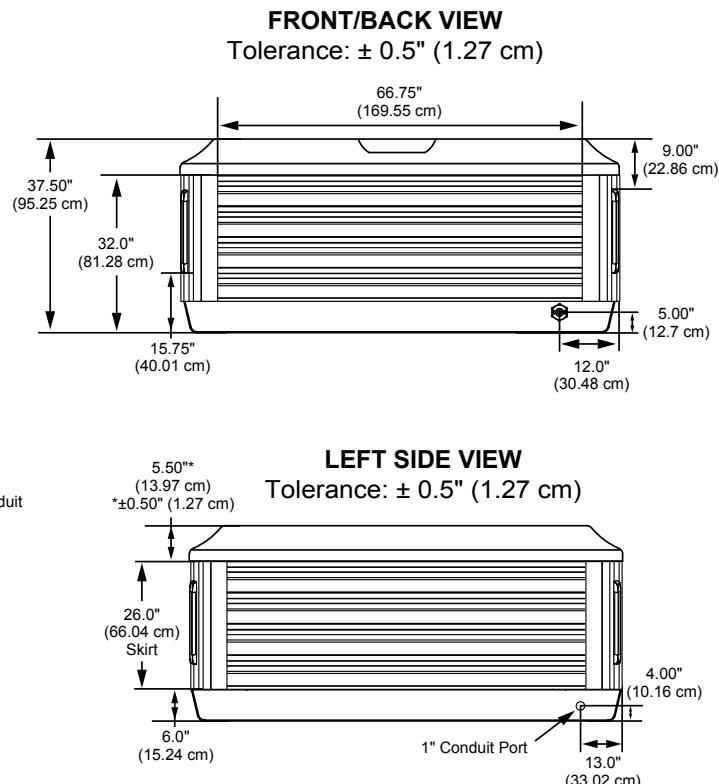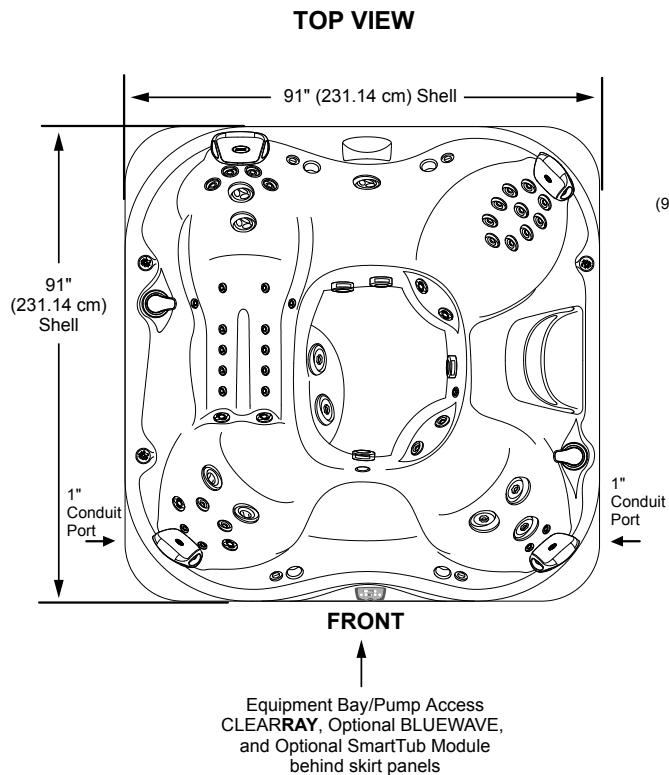


**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

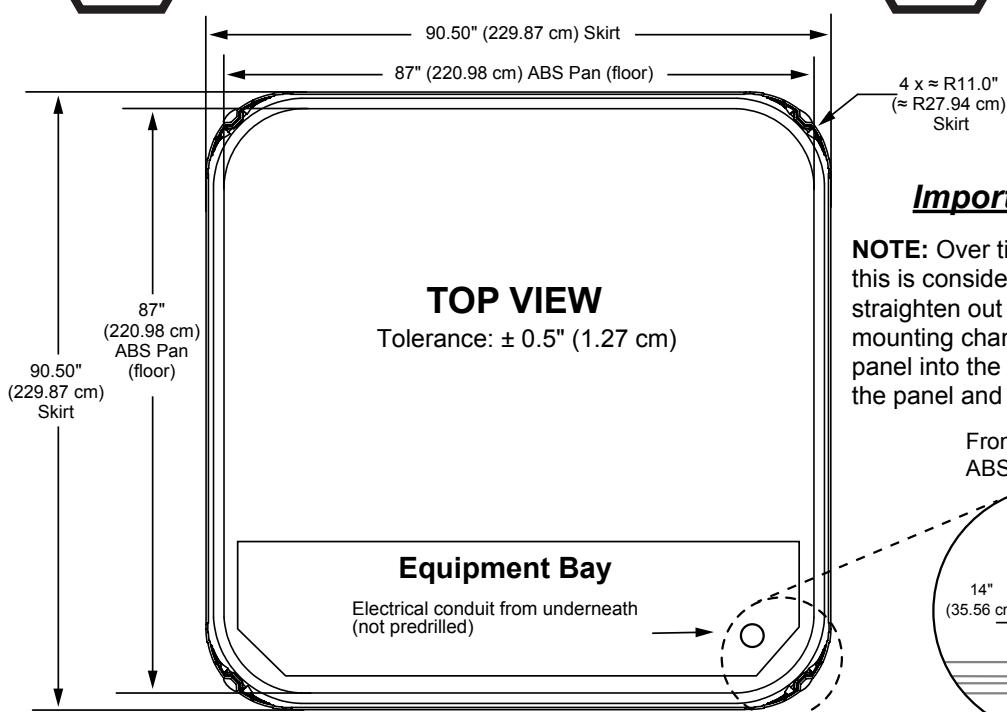

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the  
ABS pan




Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-365


## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	.....350 in. (889 cm)
<b>Dry Weight</b>	.....805 lbs (365 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,975 lbs (2,257 kg)
<b>Filled Weight (Average Fill)</b>	.....4,099 lbs (1,859 kg)
<b>Water Capacity (Spa Volume)</b>	.....500 US gallons (1,893 Liters)
<b>Water Capacity (Average Fill)</b>	.....395 US gallons (1,495 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-Hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz) 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....46
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....1 PowerPro® FX Large
<b>Seat C Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX, 3 PowerPro® MX
<b>Seat D Jets</b>	.....1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	.....10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Large
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

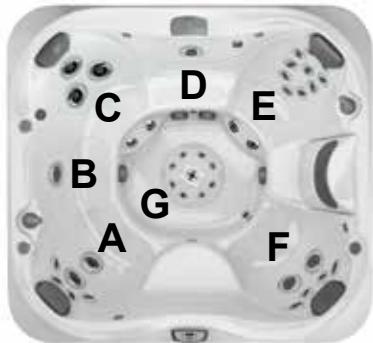

# Jacuzzi J-365

## Operation/Seat Depths

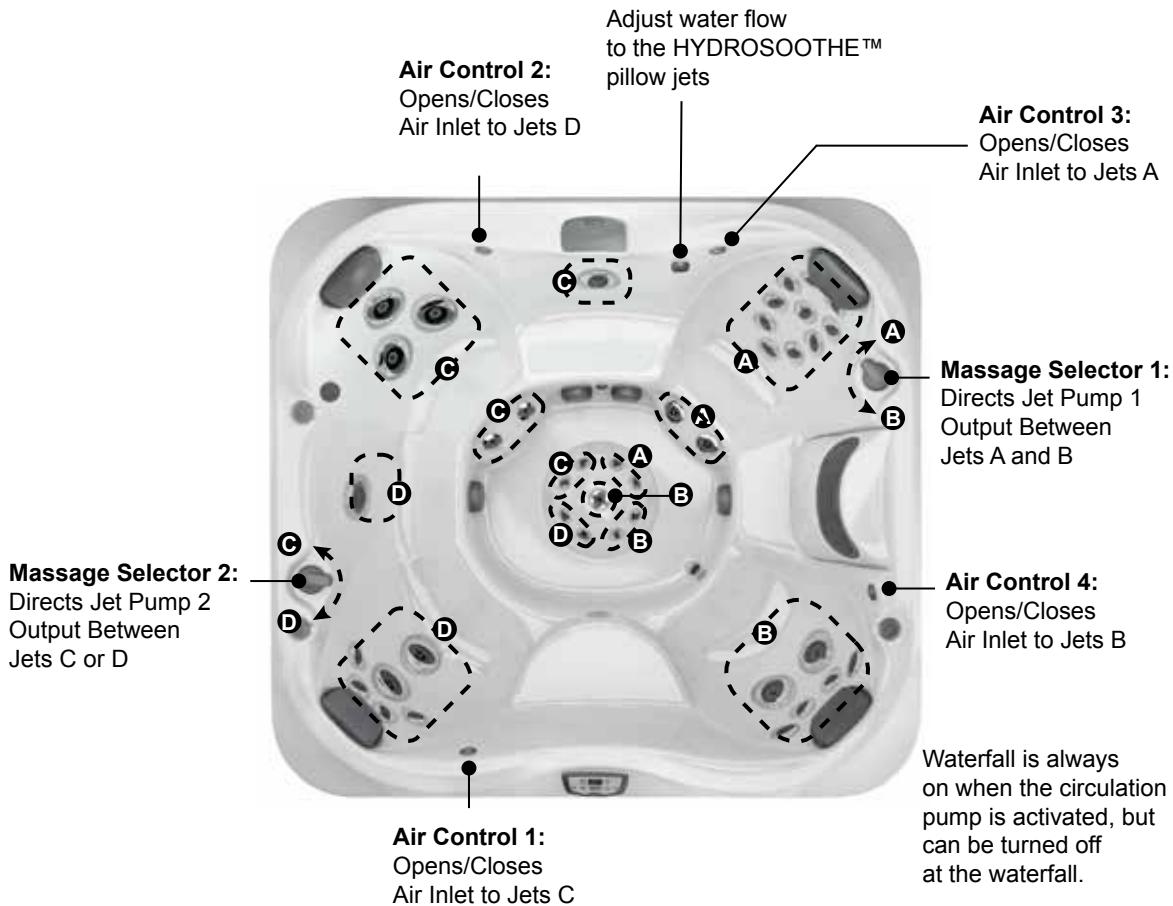

### 46 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

- A = 26.50" (67.47 cm)**
- B = 25.25" (64.14 cm)**
- C = 25.25" (64.14 cm)**
- D = 23.75" (60.33 cm)**
- E = 28.25" (71.76 cm)**

- F = 27.25" (69.22 cm)**
- G = 17.50" (44.45 cm)**
- H = 33.75" (85.73 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-365

## Dimensions

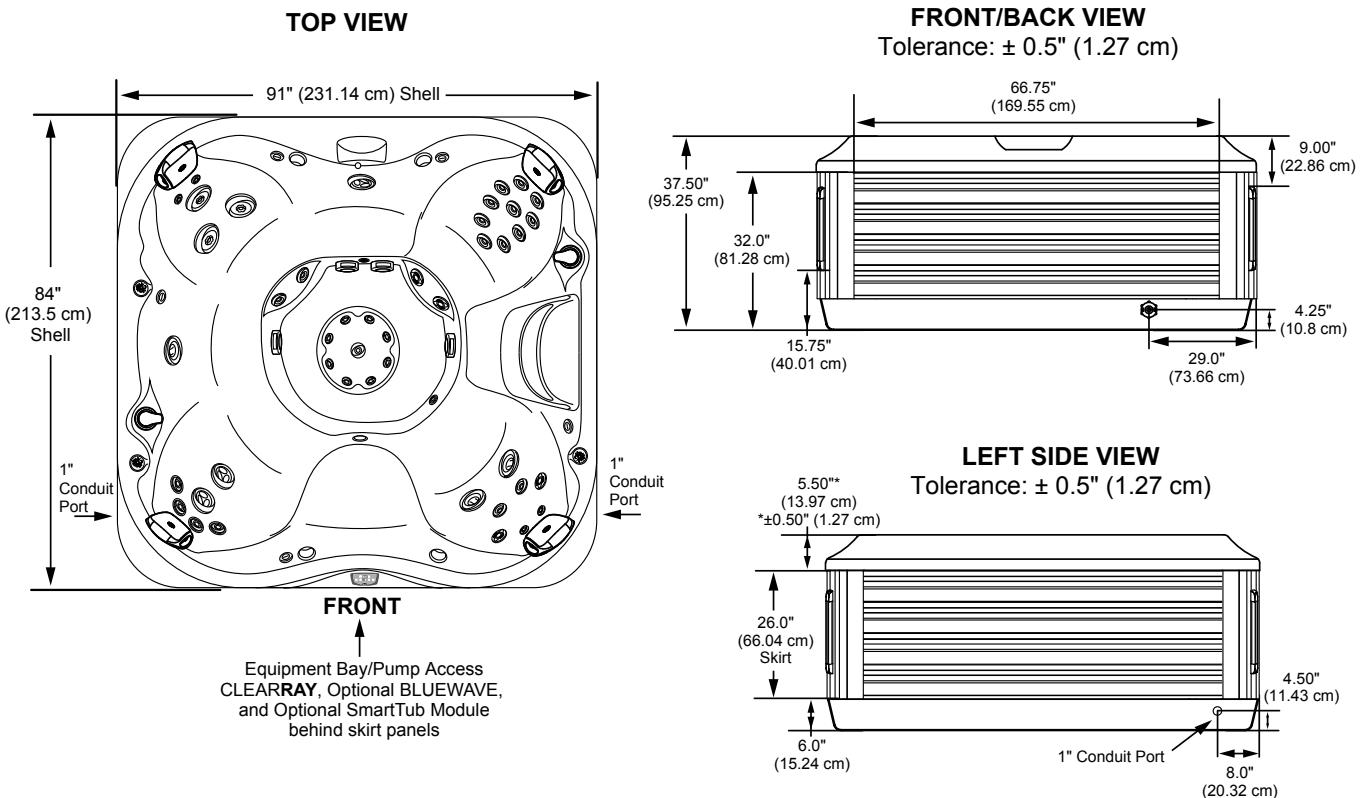



**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan

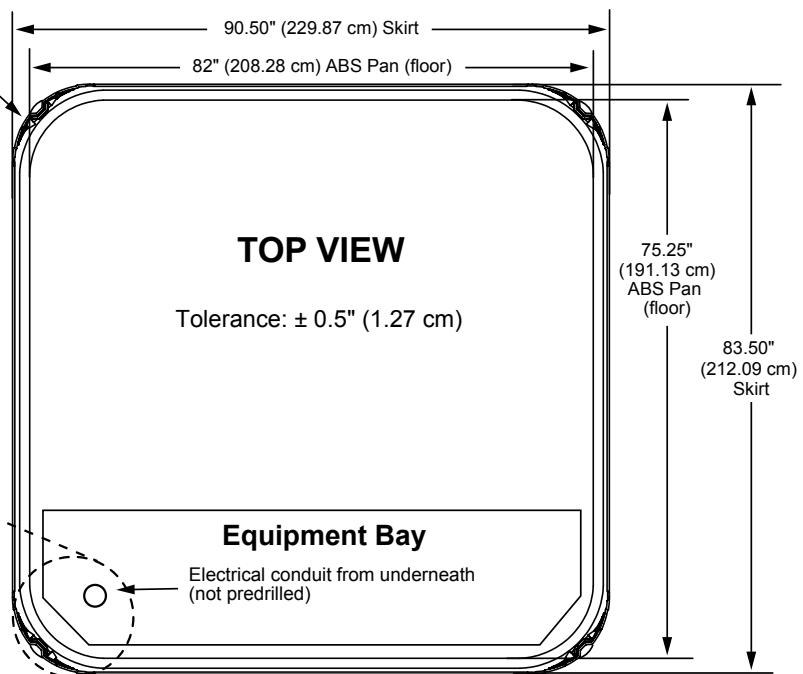


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-355


## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	350 in. (889 cm)
<b>Dry Weight</b>	813 lbs (369 kg)
<b>Filled Weight (Spa Volume)</b>	4,900 lbs (1,855 kg)
<b>Filled Weight (Average Fill)</b>	3,815 lbs (1,731 kg)
<b>Water Capacity (Spa Volume)</b>	490 US gallons (1,855 Liters)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater</b>	North America (60 Hz): 5.5kW High Flow
<b>Export (50 Hz)</b>	<b>2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	44
<b>Seat A Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	2 PowerPro® FX Large
<b>Seat C Jets</b>	10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat C HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat D Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	3, On/Off rocker style
<b>Water Management System</b>	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	3
<b>Waterfalls</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

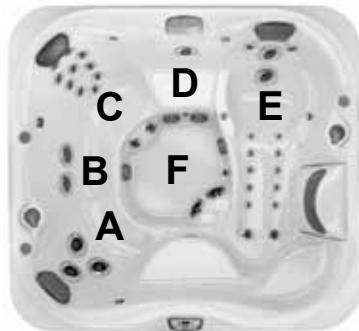

# Jacuzzi J-355

## Operation/Seat Depths

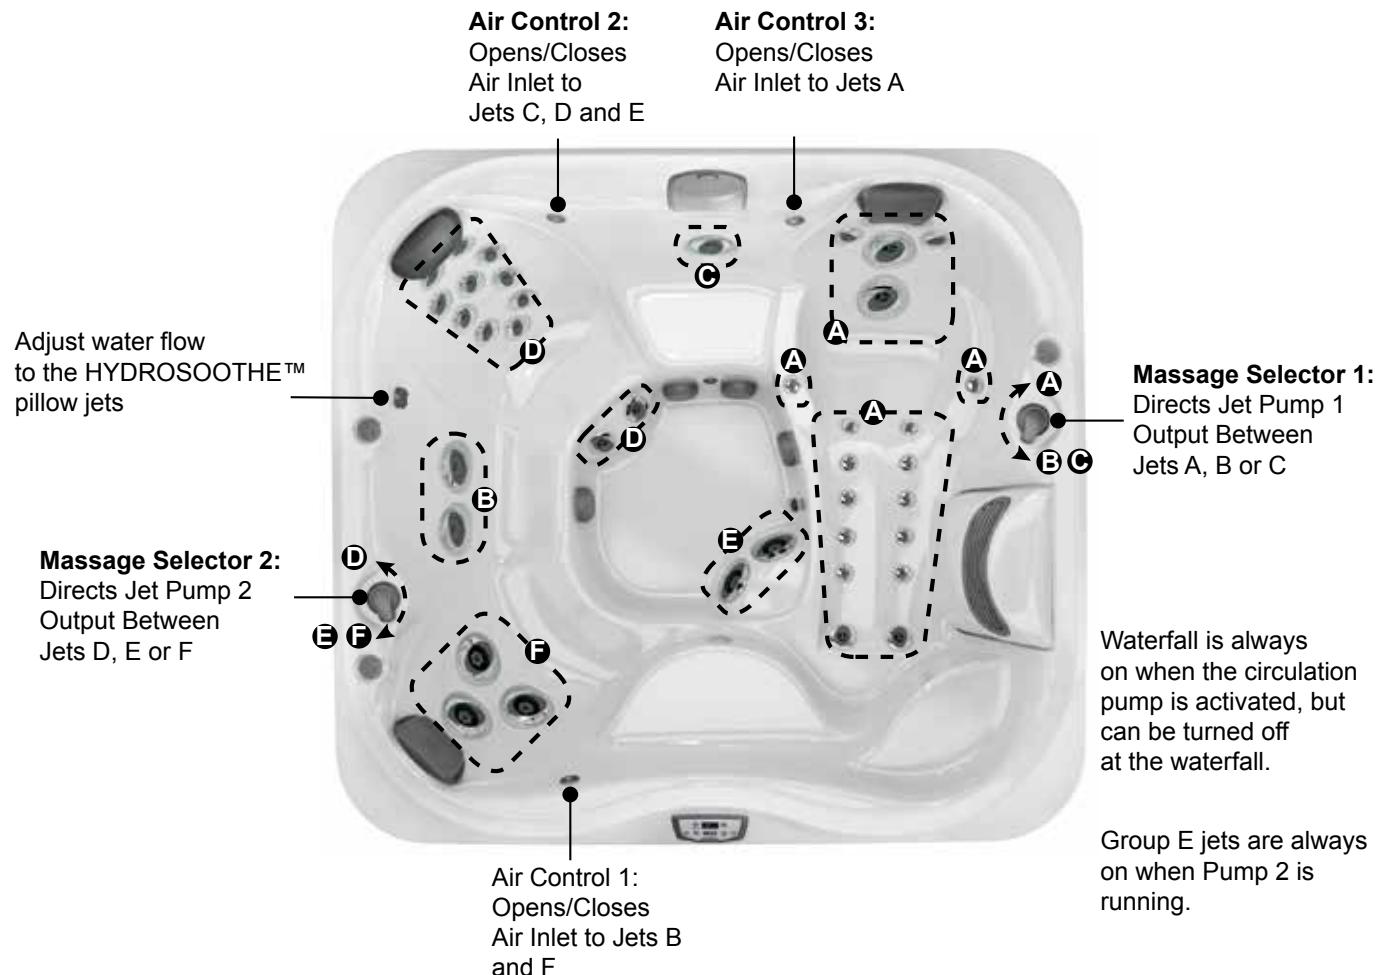


Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.25" (64.14 cm)**
- B = 26.50" (67.31 cm)**
- C = 28.75" (73.02 cm)**
- D = 21.25" (53.98 cm)**
- E = 27.00" (68.58 cm)**

- F = 9.25" (23.50 cm)**
- G = 13.50" (34.29 cm)**
- H = 33.25" (84.45 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

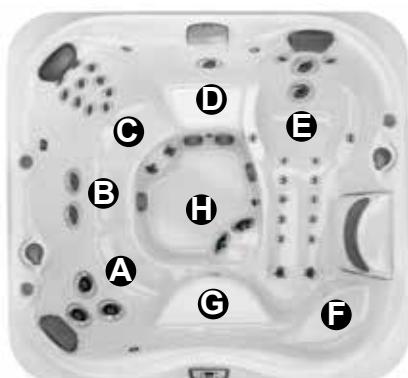

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-355

## Dimensions


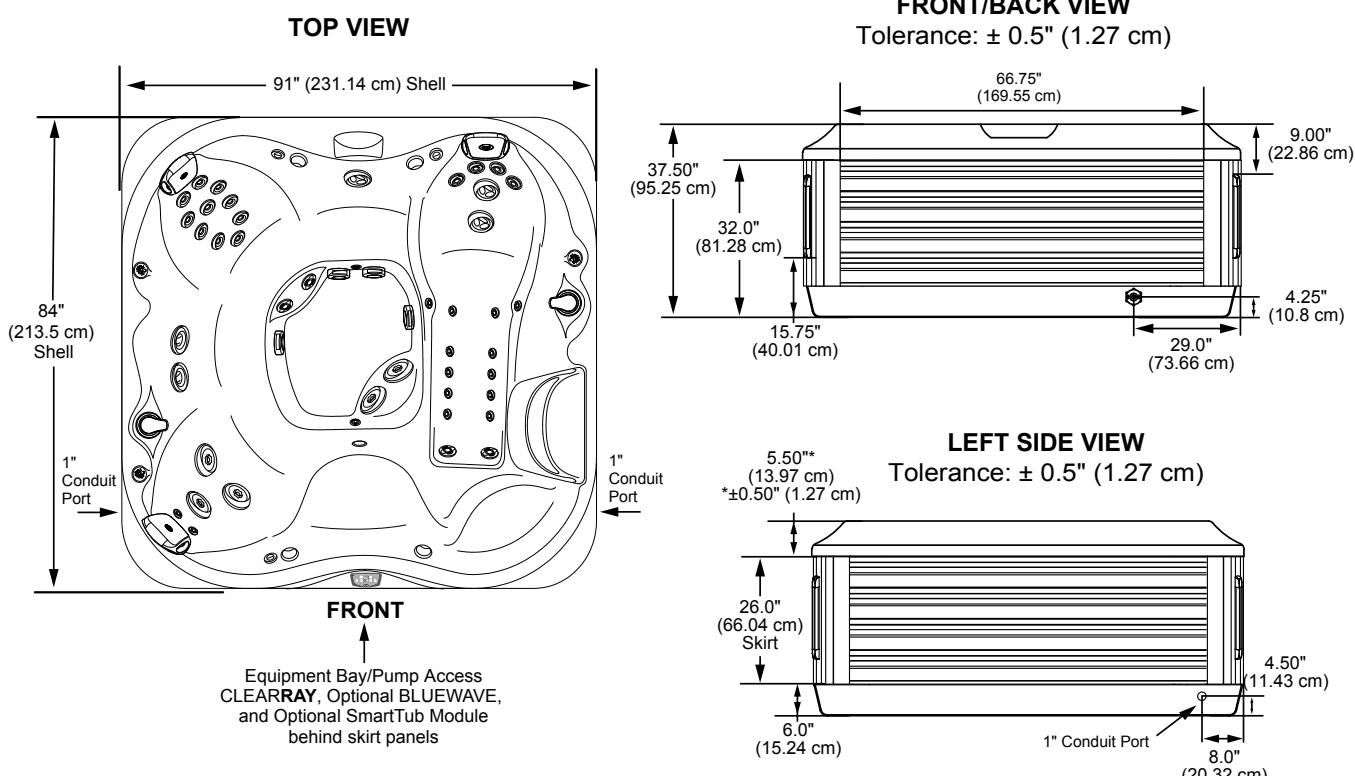


**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

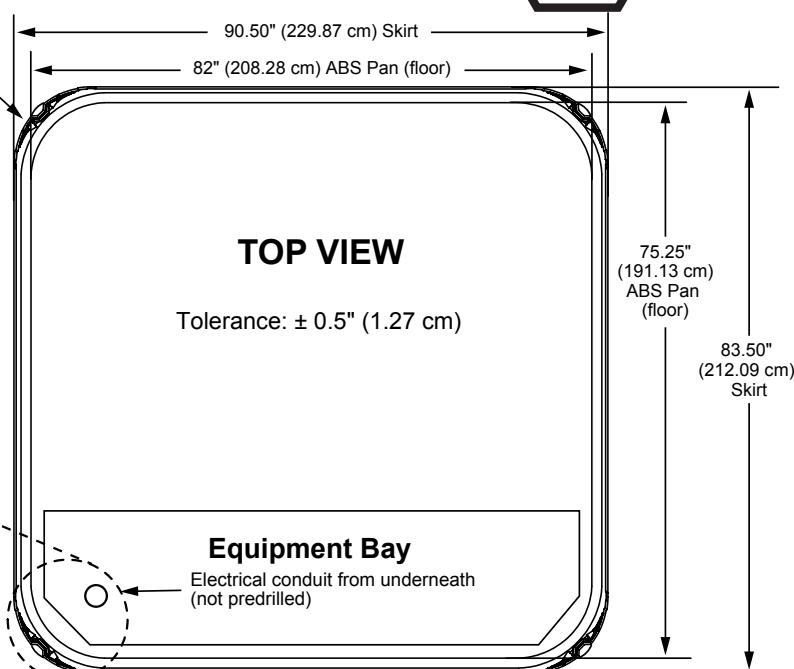

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-345


## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	.....336 in. (853.4 cm)
<b>Dry Weight</b>	.....777 lbs (352 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,488 lbs (2,036 kg)
<b>Filled Weight (Average Fill)</b>	.....3,654 lbs (1,306 kg)
<b>Water Capacity (Spa Volume)</b>	.....445 US gallons (1,685 Liters)
<b>Water Capacity (Average Fill)</b>	.....345 US gallons (1,306 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame .....Export (50 Hz): <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame .....Export (50 Hz): <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow .....Export (50 Hz) <b>2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....41
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Small
<b>Seat B Jets</b>	.....2 PowerPro® FX
<b>Seat C Jets</b>	.....3 PowerPro® MX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Small
<b>Seat D Jets</b>	.....1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	.....10 PowerPro® FX, 2 PowerPro® FX Small
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Small
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets .....pump 1; Factory installed <b>CLEARRAY® Active Oxygen System</b> .....Export (50 Hz): <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	.....4
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A .....Export (50 Hz): <b>230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... <b>North America (60 Hz):</b> 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; ..... <b>Export (50 Hz):</b> <b>10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer




# Jacuzzi J-345

## Operation/Seat Depths

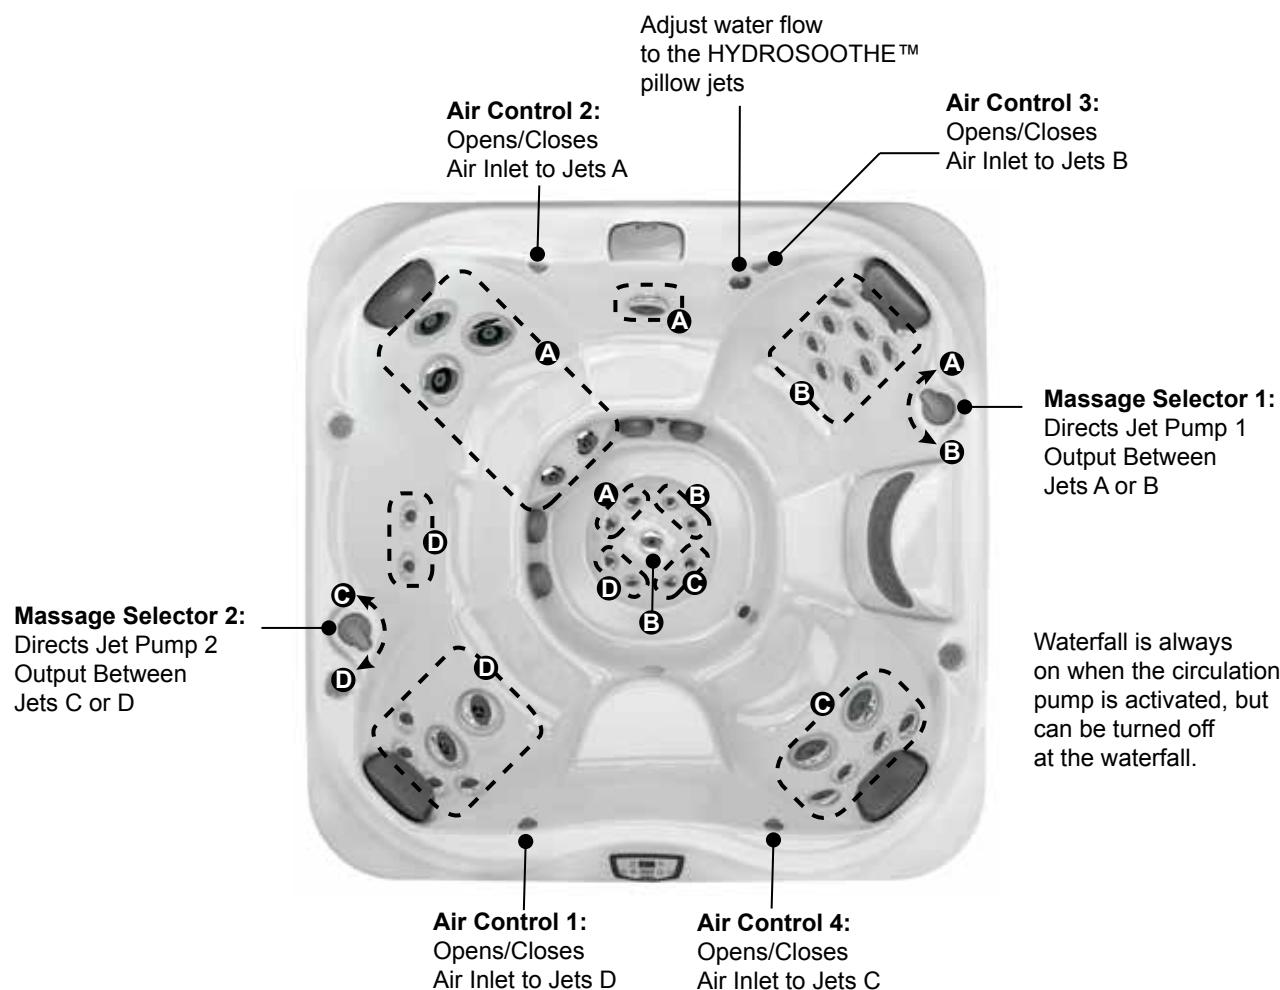

### 41 Total Jets

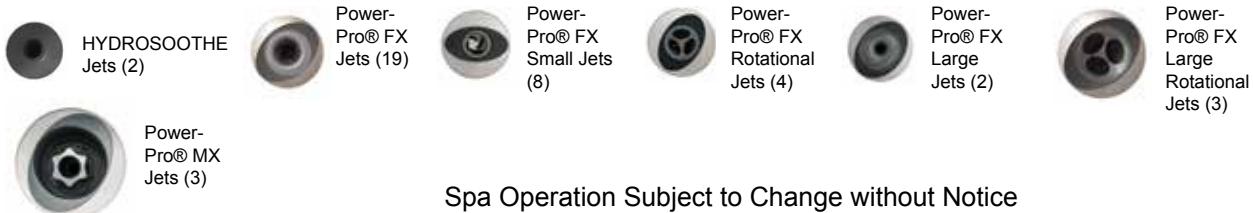

Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.25" (64.1 cm)**
- B = 25.25" (64.1 cm)**
- C = 25.13" (63.8 cm)**
- D = 23.50" (59.7 cm)**
- E = 28.50" (72.4 cm)**

- F = 25.13" (63.8 cm)**
- G = 16.75" (42.5 cm)**
- H = 33.50" (85.1 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-345

## Dimensions


**TOP VIEW**

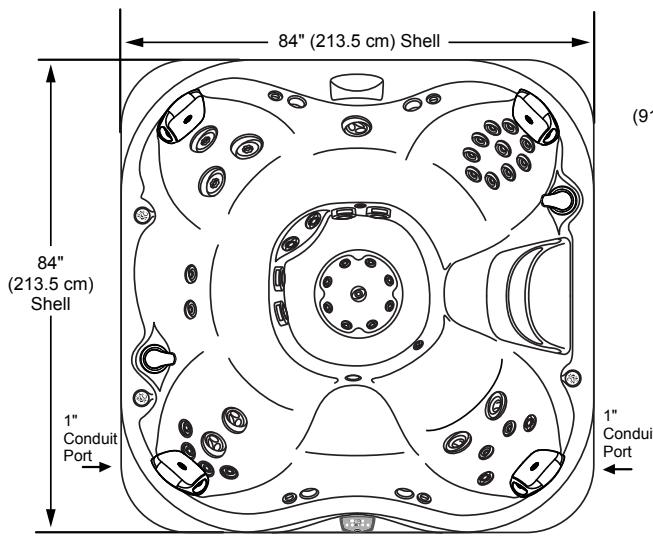


**FRONT**

Equipment Bay/Pump Access  
CLEARRAY, Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

**FRONT/BACK VIEW**

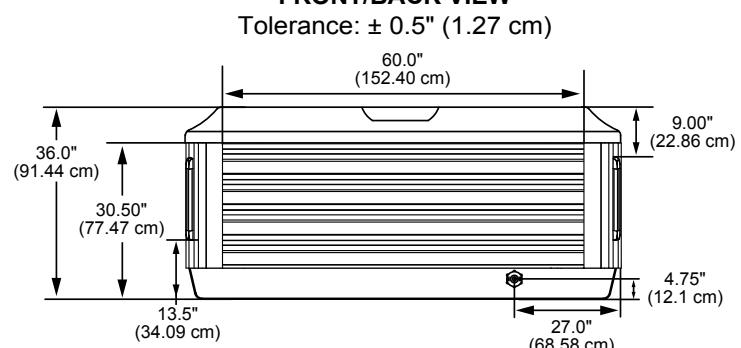


**LEFT SIDE VIEW**

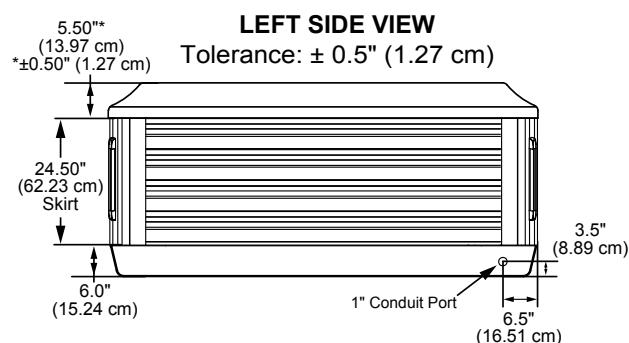

**STOP**


**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

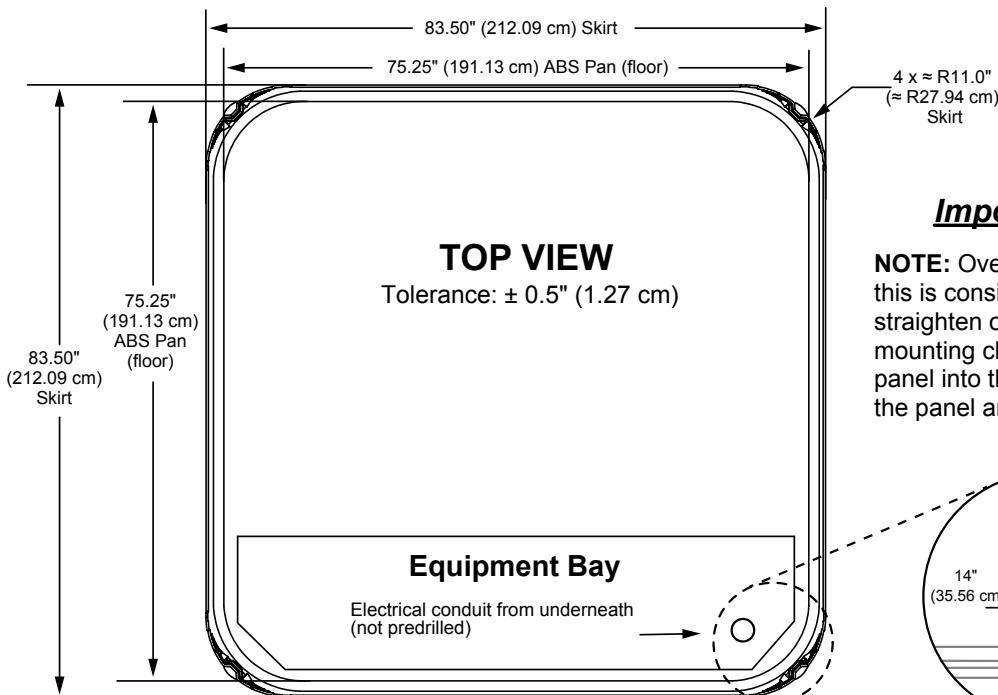

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



From the edge of  
the ABS pan

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-335


## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	336 in. (853.4 cm)
<b>Dry Weight</b>	764 lbs (347 kg)
<b>Filled Weight (Spa Volume)</b>	4,684 lbs (2,125 kg)
<b>Filled Weight (Average Fill)</b>	3,683 lbs (1,671 kg)
<b>Water Capacity (Spa Volume)</b>	450 US gallons (1,703 Liters)
<b>Water Capacity (Average Fill)</b>	350 US gallons (1,325 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater</b>	North America (60 Hz): 5.5 kW High Flow
<b>Export (50 Hz)</b>	<b>2.7 kW High Flow</b>
<b>Total PowerPro® Jets</b>	42
<b>Seat A Jets</b>	2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 12 PowerPro® BX
<b>Seat C Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b>	10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat D HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat E Jets</b>	2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	3, On/Off rocker style
<b>Water Management System</b>	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	4
<b>Waterfall</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 230-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



# Jacuzzi J-335

## Operation/Seat Depths

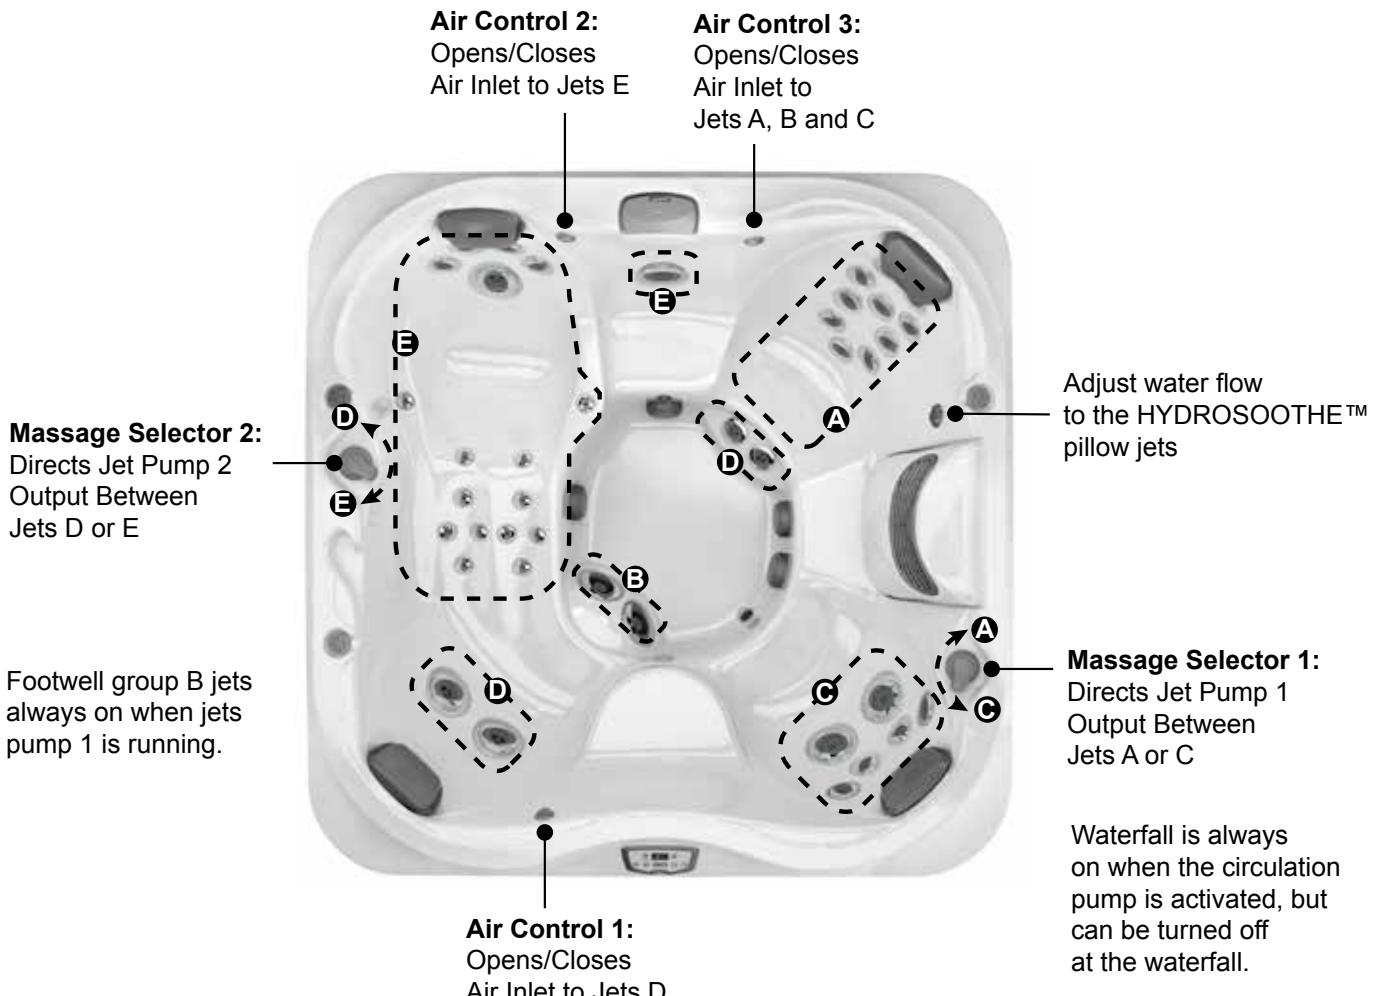

**42 Total Jets**



Power-Pro® BX  
Jets (12)



HYDROSOOTHE  
Jets (2)



Power-Pro® FX  
Jets (16)



Power-Pro® FX  
Rotational  
Jets (4)



Power-Pro® FX  
Large  
Jets (2)



Power-Pro® FX  
Large  
Rotational  
Jets (4)



Power-Pro® MX  
Jets (2)


Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.75" (65.4 cm)**
- B = 27.50" (69.9 cm)**
- C = 23.50" (59.7 cm)**
- D = 28.25" (71.8 cm)**
- E = 22.75" (57.8 cm)**

- F = 25.50" (64.8 cm)**
- G = 16.75" (42.5 cm)**
- H = 33.50" (85.1 cm)**





Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm$  0.5" (1.27 cm).

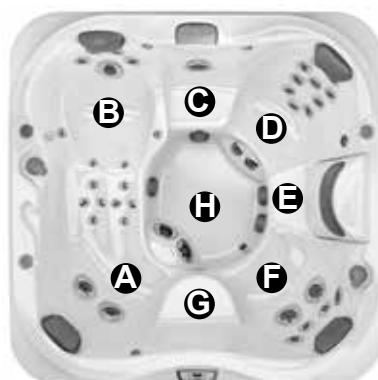

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-335

## Dimensions

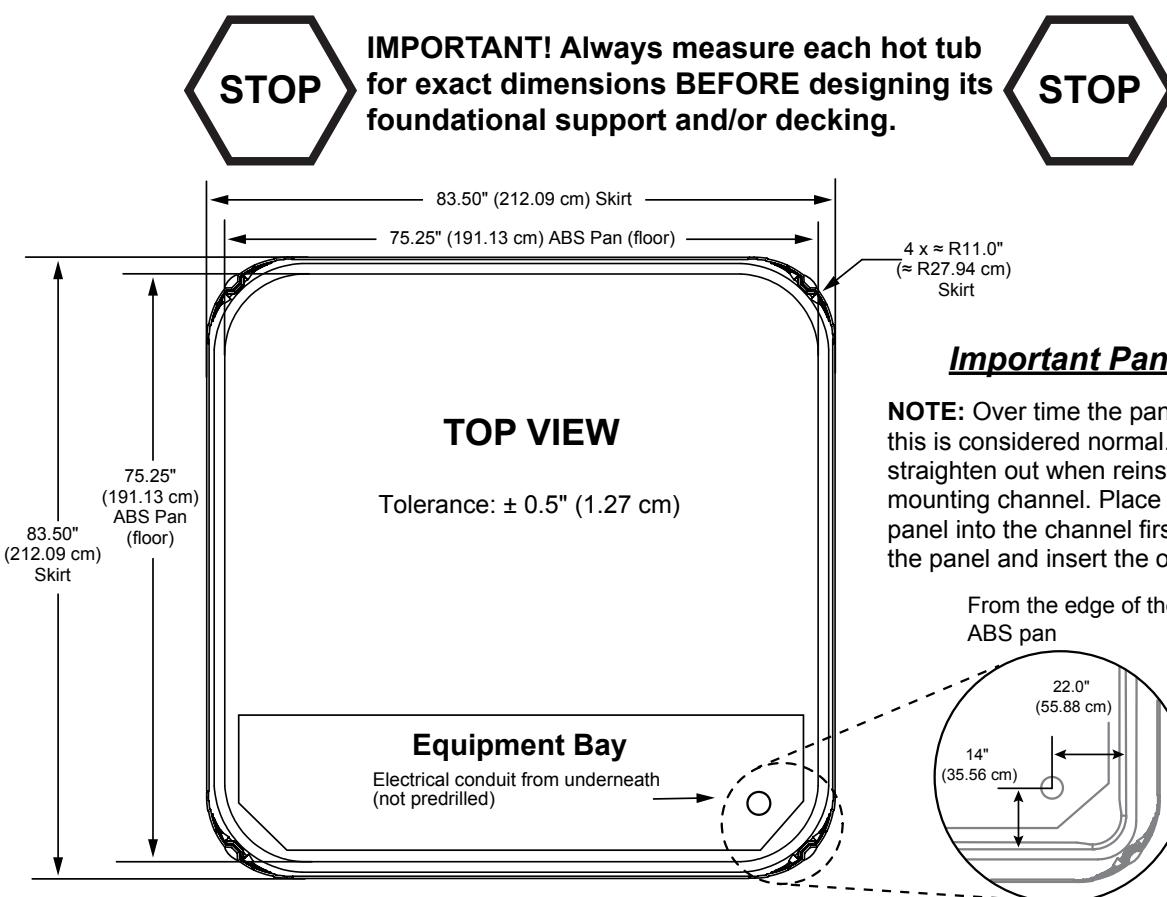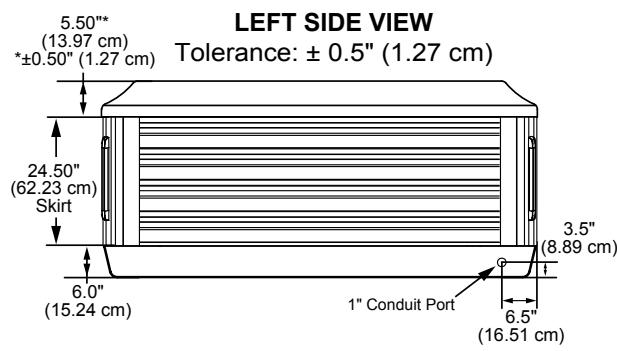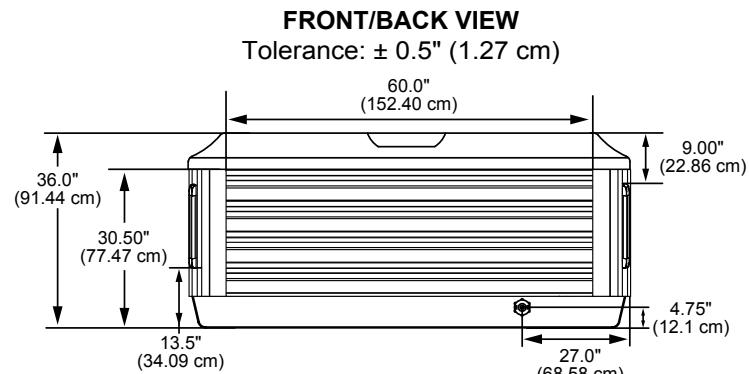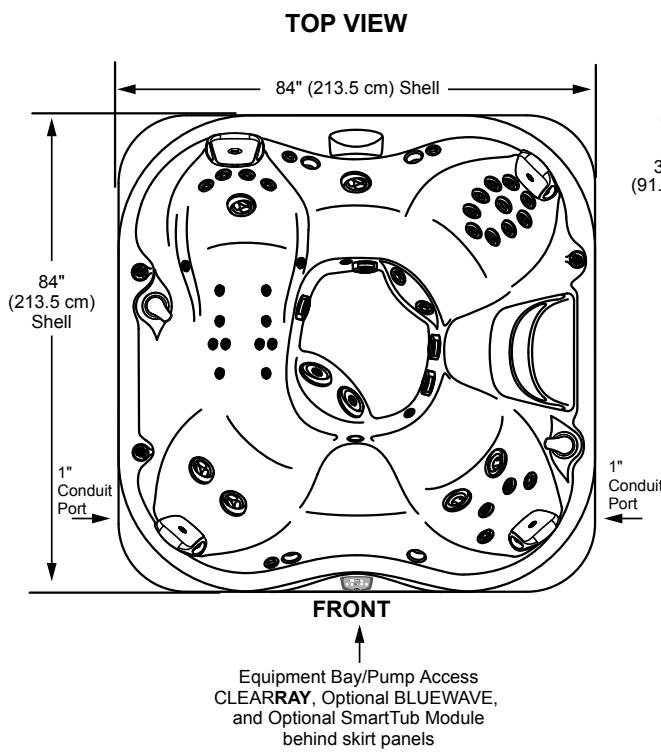

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-325


## Specifications

<b>Seating Capacity</b>	4-5 Adults
<b>Dimensions</b>	84" x 76" x 33.50" (213.5 cm x 193 cm x 85.09 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	320 in. (812.8 cm)
<b>Dry Weight</b>	619 lbs (281 kg)
<b>Filled Weight (Spa Volume)</b>	4,372 lbs (1,983 kg)
<b>Filled Weight (Average Fill)</b>	3,413 lbs (1,548 kg)
<b>Water Capacity (Spa Volume)</b>	450 US gallons (1,703 Liters)
<b>Water Capacity (Average Fill)</b>	335 US gallons (1,268 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1 (Convertible)</b>	North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
<b>(3-Wire 240V)</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater (Convertible)</b>	North America (60 Hz): 1kW/4.0 kW Low Flow
<b>(3-Wire 240V)</b>	North America (60 Hz): 4.0 kW Low Flow
<b>Export (50 Hz)</b>	<b>2.7 kW Low Flow</b>
<b>Total PowerPro® Jets</b>	23
<b>Seat A Jets</b>	2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Seat B Jets</b>	1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large
<b>Seat C Jets</b>	4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat C HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat D Jets</b>	2 PowerPro® FX Large Rotational
<b>Footwell (E)</b>	4 PowerPro® FX Small
<b>Massage Selectors</b>	1
<b>Air Controls</b>	4, On/Off rocker style
<b>Water Management System</b>	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	<b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	4
<b>Waterfall</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A, North America (60 Hz): 3-Wire 240V@30A, 40A <b>Export (50 Hz): 230-240 VAC@1x16A or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



# Jacuzzi J-325

## Operation/Seat Depths

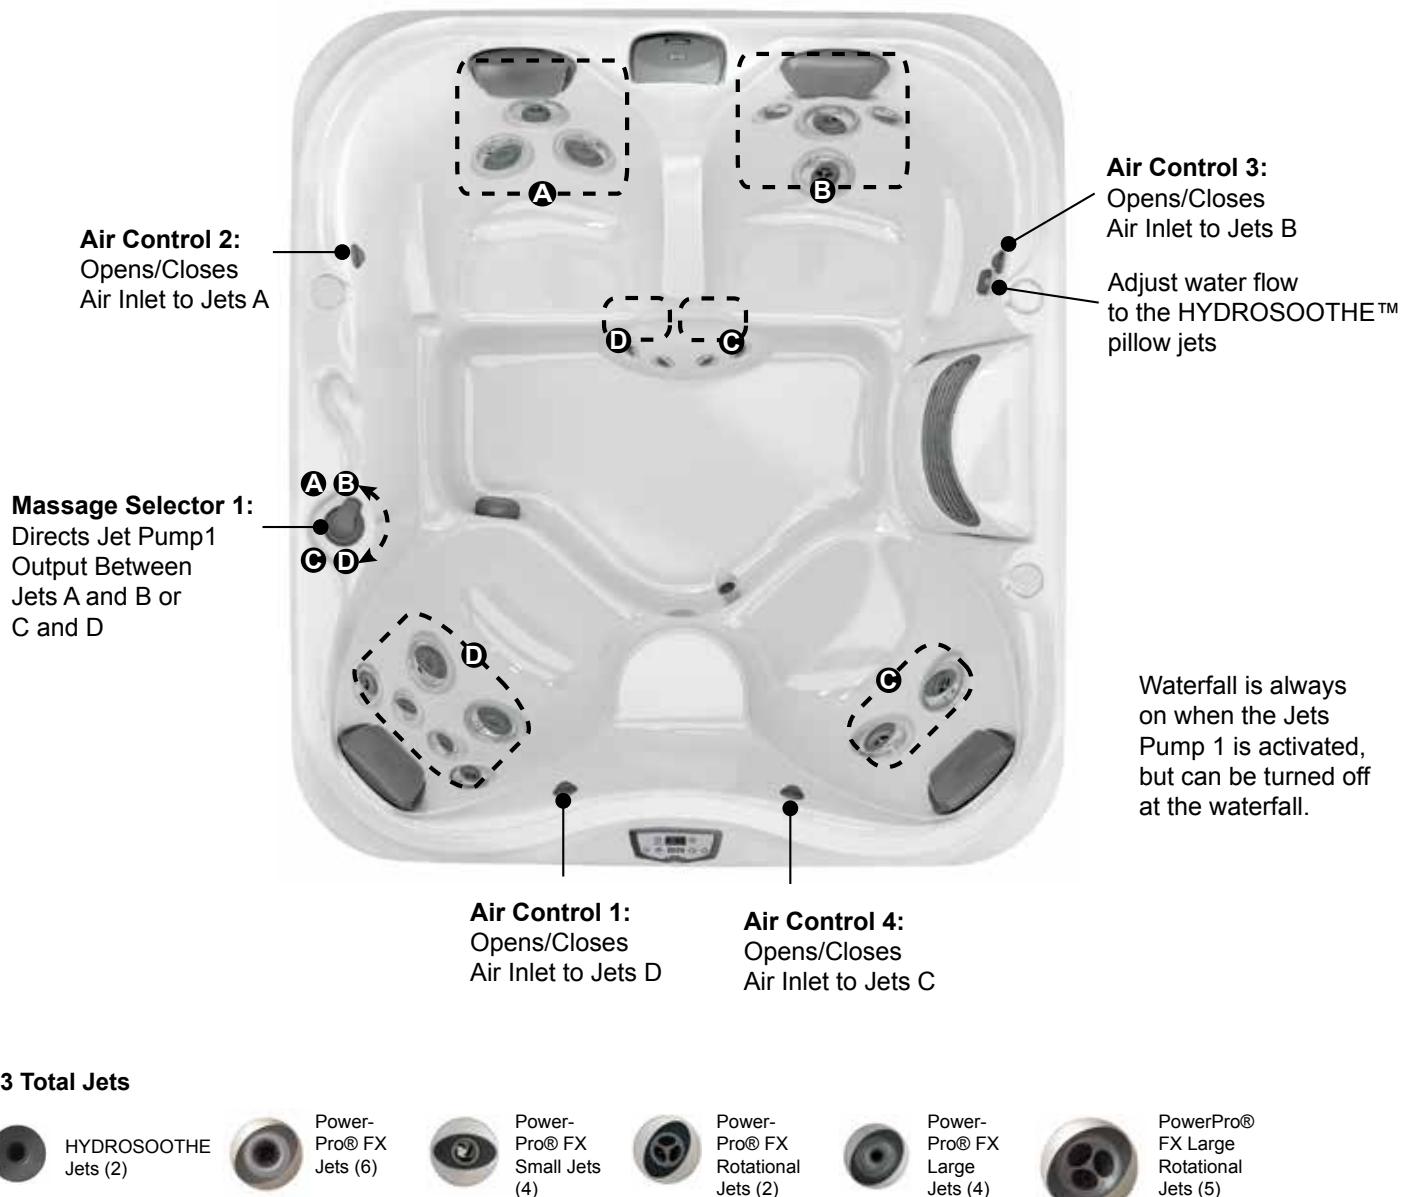

23 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

- A = 27.38" (69.5 cm)**
- B = 27.38" (69.5 cm)**
- C = 27.38" (69.5 cm)**
- D = 25.75" (65.4 cm)**
- E = 16.63" (42.2 cm)**
- F = 31.25" (79.4 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat.  
Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-325

## Dimensions


**TOP VIEW**

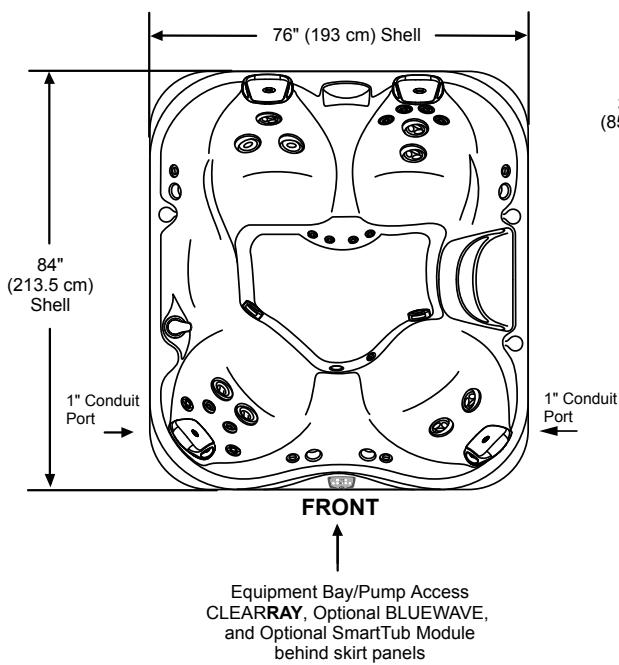

**FRONT/BACK VIEW**

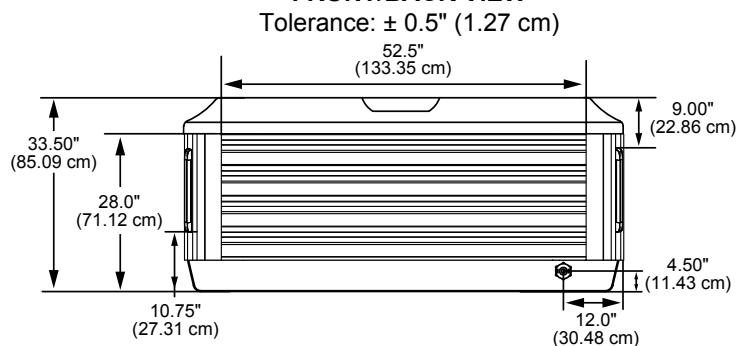


**LEFT SIDE VIEW**

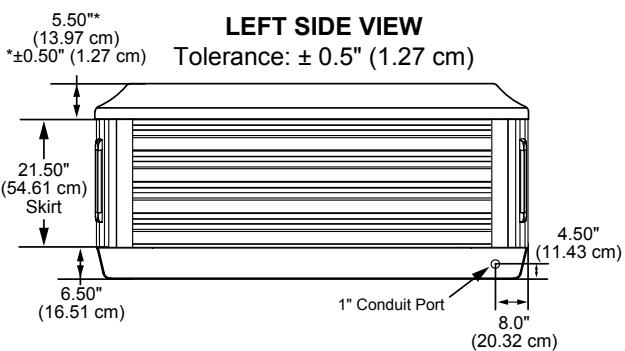

**STOP**

**IMPORTANT! Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.**


**STOP**

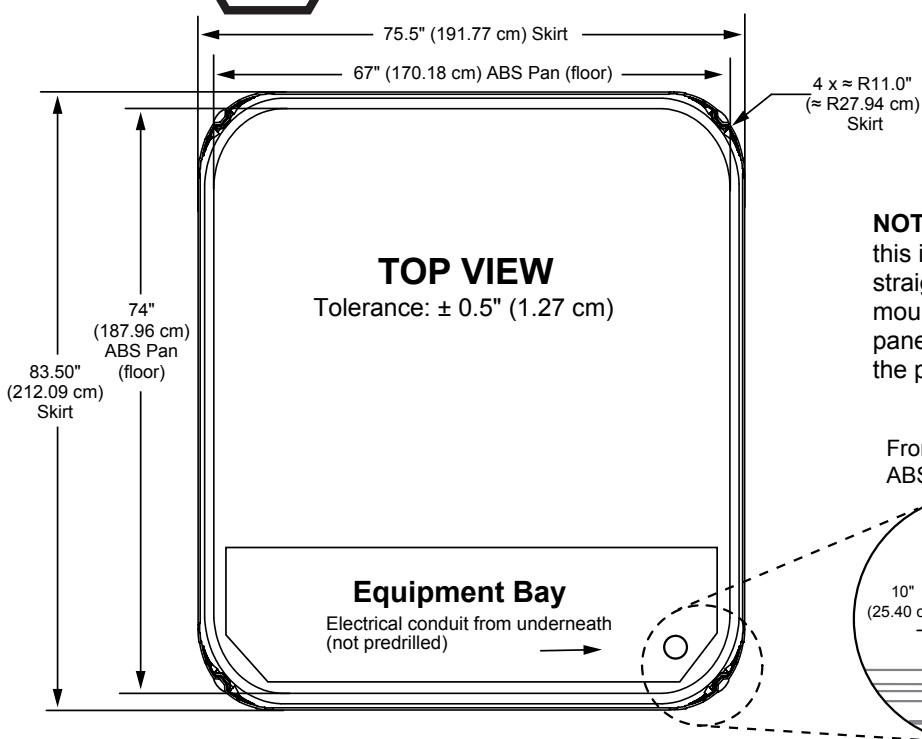

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the  
ABS pan



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-315


## Specifications

<b>Seating Capacity</b>	.....2-3 Adults
<b>Dimensions</b>	.....66" x 76" x 31.75" (168 cm x 193 cm x 80.65 cm); <b>For Complete Dimensions, See page 97</b>
<b>Perimeter</b>	.....284 in. (721.4 cm)
<b>Dry Weight</b>	.....531 lbs (241 kg)
<b>Filled Weight (Spa Volume)</b>	.....2,866 lbs (1,300 kg)
<b>Filled Weight (Average Fill)</b>	.....2,282 lbs (1,035 kg)
<b>Water Capacity (Spa Volume)</b>	.....280 US gallons (1,060 Liters)
<b>Water Capacity (Average Fill)</b>	.....210 US gallons (795 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LCD readout, programmable temperature, filtration, and heat cycles
<b>Pump 1 (Convertible)</b>	.....North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
(3-Wire 240V)	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater (Convertible)</b>	.....North America (60 Hz): 1kW/4.0 kW Low Flow
(3-Wire 240V)	.....North America (60 Hz): 4.0 kW Low Flow
Export (50 Hz)	..... <b>2.7 kW Low Flow</b>
<b>Total PowerPro® Jets</b>	.....23
<b>Seat A Jets</b>	.....2 PowerPro® FX Rotational, 2 PowerPro® FX
<b>Seat B Jets</b>	.....6 PowerPro® FX, 2 PowerPro® FX Large Rotational, 6 PowerPro® BX
<b>Seat B HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat C Jets</b>	.....1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large Rotational
<b>Massage Selectors</b>	.....1
<b>Air Controls</b>	.....3, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed CLEARRAY® Active Oxygen System
Export (50 Hz):	..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and OPTIONAL exterior light
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Headrests</b>	.....3
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Electrical Requirements:</b>	.....North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A North America (60 Hz): 3-Wire 240V@30A, 40A <b>Export (50 Hz): 230-240 VAC@1x16A, or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module, Exterior Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer



# Jacuzzi J-315

## Operation/Seat Depths

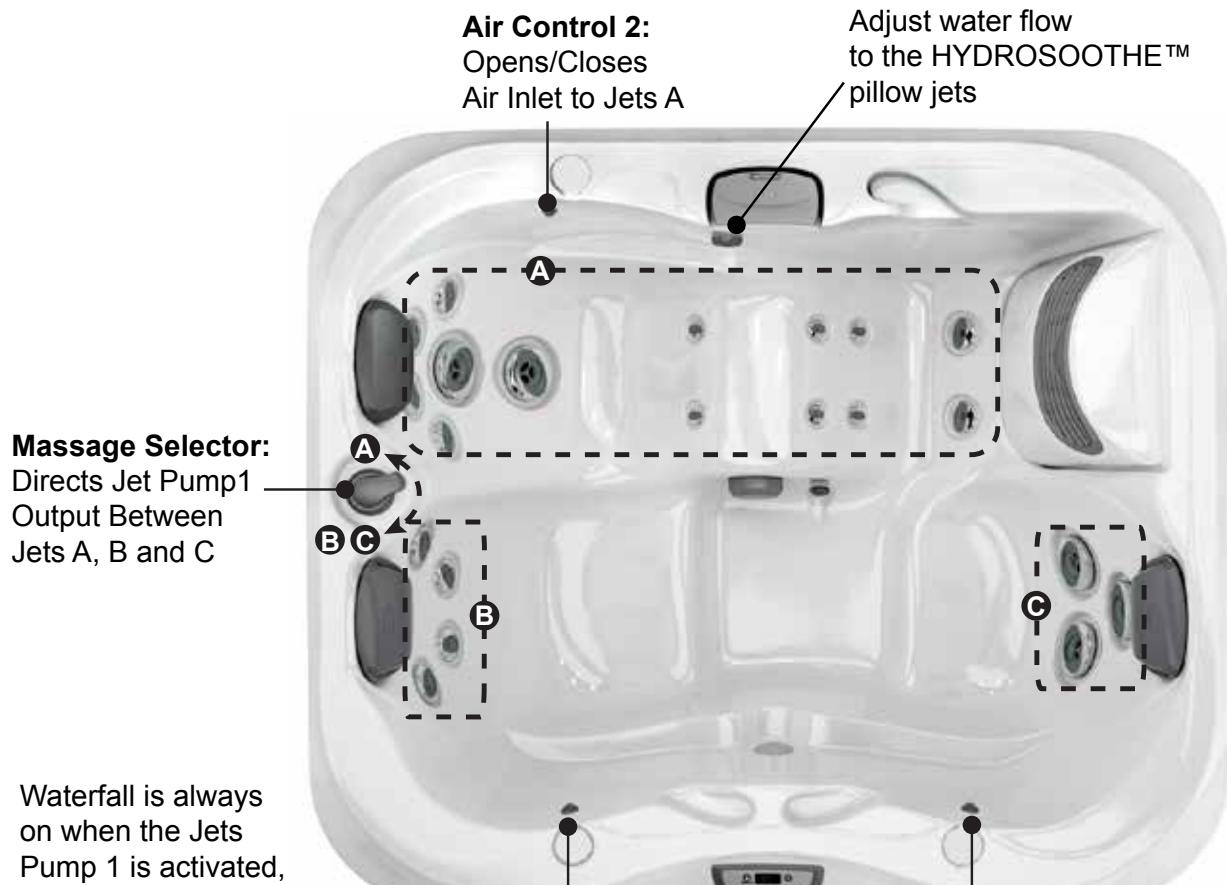

Waterfall is always on when the Jets Pump 1 is activated, but can be turned off at the waterfall.

### 23 Total Jets


	Power-Pro® BX Jets (6)		HYDROSOOTHE™ Jets (2)		Power-Pro® FX Jets (8)		Power-Pro® FX Rotational Jets (2)		Power-Pro® FX Large Jets (2)		Power-Pro® FX Large Rotational Jets (3)
--	------------------------	--	-----------------------	--	------------------------	--	-----------------------------------	--	------------------------------	--	---

Spa Operation Subject to Change without Notice

## Seat Depths

- A = 27.50" (69.9 cm)**
- B = 26.25" (66.7 cm)**
- C = 27.88" (70.8 cm)**
- D = 26.75" (69.4 cm)**
- E = 27.50" (69.9 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

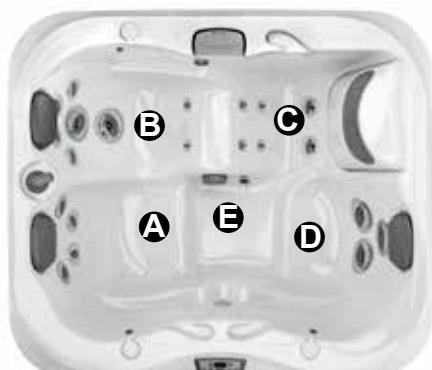


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-315

## Dimensions


**TOP VIEW**

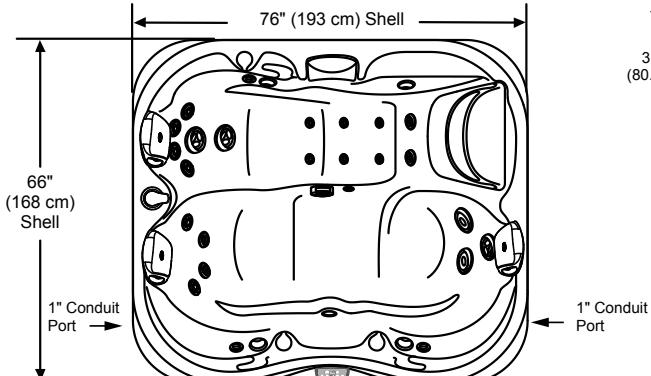


**FRONT**

Equipment Bay/Pump Access  
CLEARRAY, Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

**FRONT/BACK VIEW**

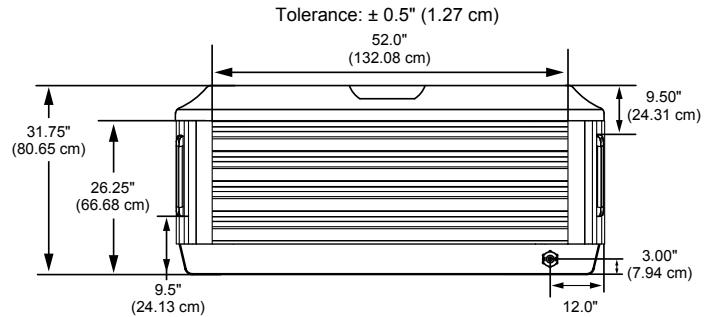

**LEFT SIDE VIEW**

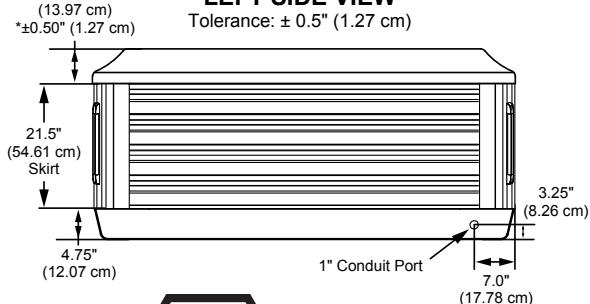


**STOP**

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal.  
The panels will straighten out when reinstalled into the mounting  
channel. Place one end of the panel into the channel first then flatten  
the panel and insert the other end.

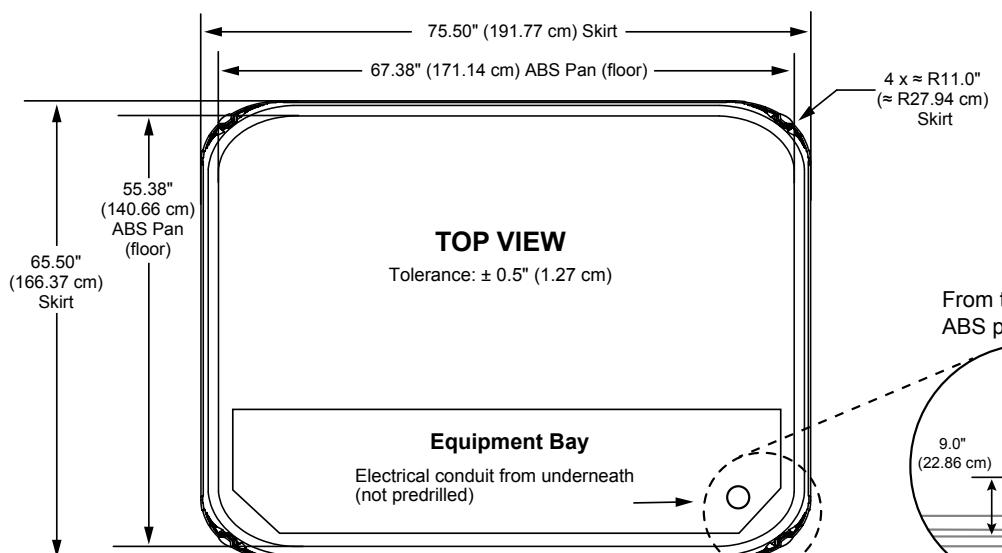


From the edge of the  
ABS pan

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-280


## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....90" x 90" x 36.5" (228.6 cm x 228.6 cm x 92.7 cm); <b>For Complete Dimensions, See page 98</b>
<b>Perimeter</b>	.....360 in. (914.4 cm)
<b>Dry Weight</b>	.....885 lbs (401 kg)
<b>Filled Weight (Spa Volume)</b>	.....5,639 lbs (2,558 kg)
<b>Filled Weight (Average Fill)</b>	.....4,721 lbs (2,142 kg)
<b>Water Capacity (Spa Volume)</b>	.....570 US gallons (2,158 Liters)
<b>Water Capacity (Average Fill)</b>	.....460 US gallons (1,741 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....No
<b>Total Jets</b>	.....44
<b>Seat A Jets</b>	.....2 Classic PRO Accu-Pressure, 4 Classic PRO Duo Rotator
<b>Seat B Jets</b>	.....2 Classic PRO Directional, 2 Classic PRO Duo Rotator
<b>Seat C Jets</b>	.....2 Classic PRO Pulsating, 8 Classic PRO Accu-Pressure, 1 Classic PRO Turbo
<b>Seat D Jets</b>	.....4 Classic PRO Accu-Pressure
<b>Seat E Jets</b>	.....2 Classic PRO Accu-Pressure, 6 Classic PRO Mini Duo Rotator
<b>Seat F Jets</b>	.....2 Classic PRO Duo Rotator, 2 Classic PRO Pulsating, 4 Classic PRO Accu-Pressure
<b>Footwell (G)</b>	.....3 Classic PRO Directional
<b>Massage Selectors</b>	.....1
<b>Air Controls</b>	.....4
<b>Water Management System</b>	.....One 95 ft <sup>2</sup> filter cartridge on jets pump 1, Factory installed CLEARRAY® Active Oxygen System
<b>Export (50 Hz):</b>	..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....Classic lighting package of 22 perimeter LED lights, 3 waterfall lights and footwell multi-color LED light
<b>Synthetic Cabinet Colors</b>	.....Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	.....4
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A or 60A ..... <b>Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo ..... <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module
<b>Audio System (Optional)</b>	.....N/A
<b>Alternative Insulation (Option):</b>	.. Yes



# Jacuzzi J-280

## Operation/Seat Depths

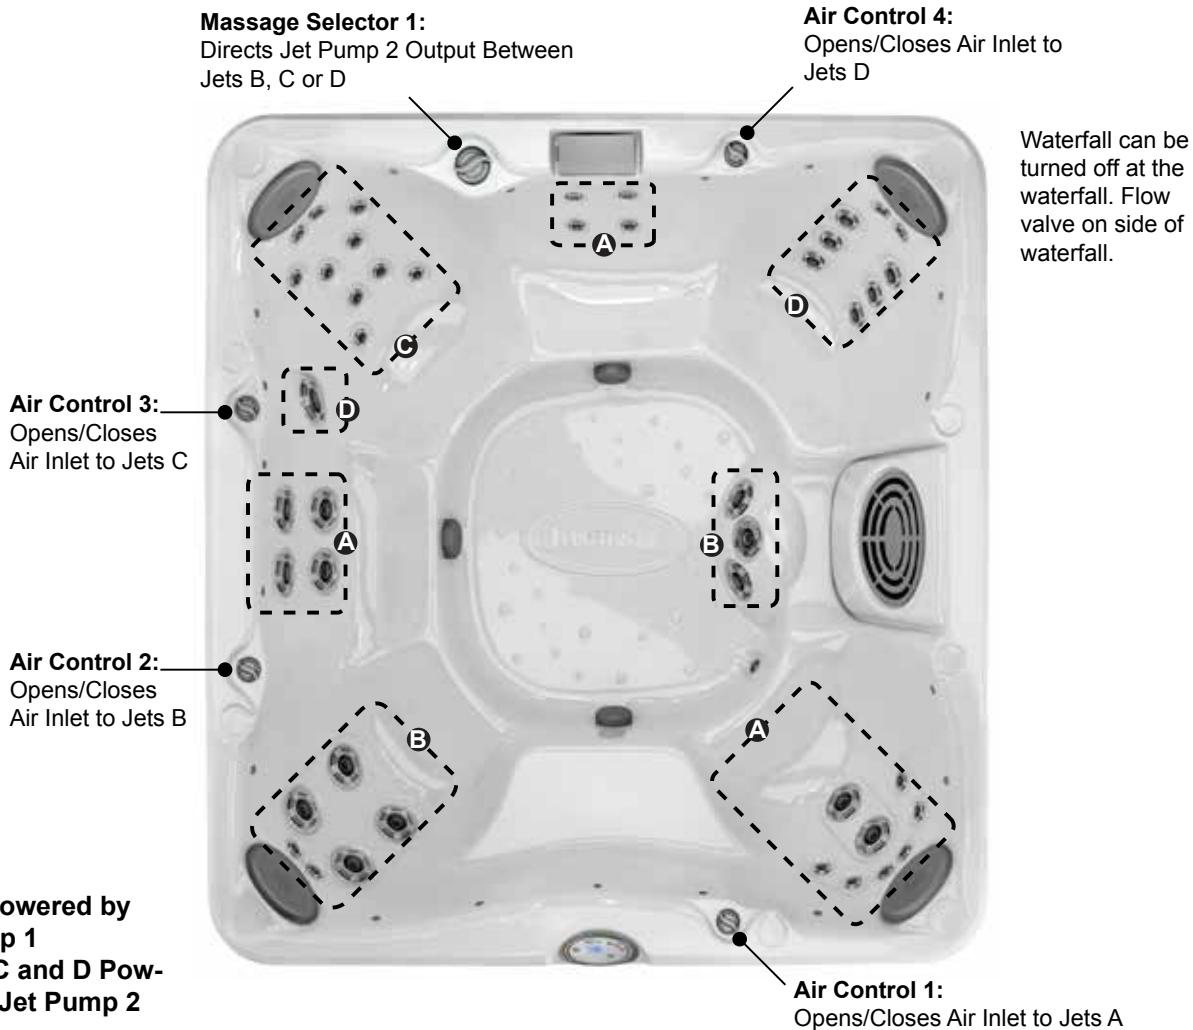

### 44 Total Jets



Spa Operation Subject to Change without Notice

### Seat Depths

**A = 28.00" (71.1 cm)**

**B = 24.00" (60.6 cm)**

**C = 26.50" (67.3 cm)**

**D = 24.50" (62.2 cm)**


**E = 16.00" (40.6 cm)**

**F = 25.50" (64.8 cm)**

**G = 23.00" (58.4 cm)**

**H = 30.00" (76.2 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

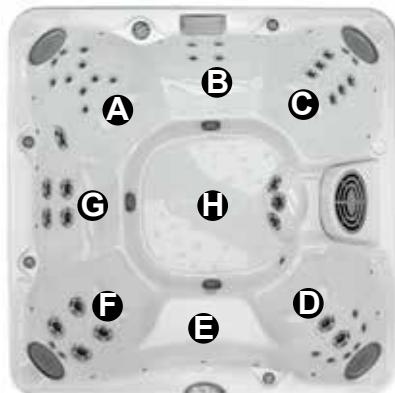

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-280


## Dimensions

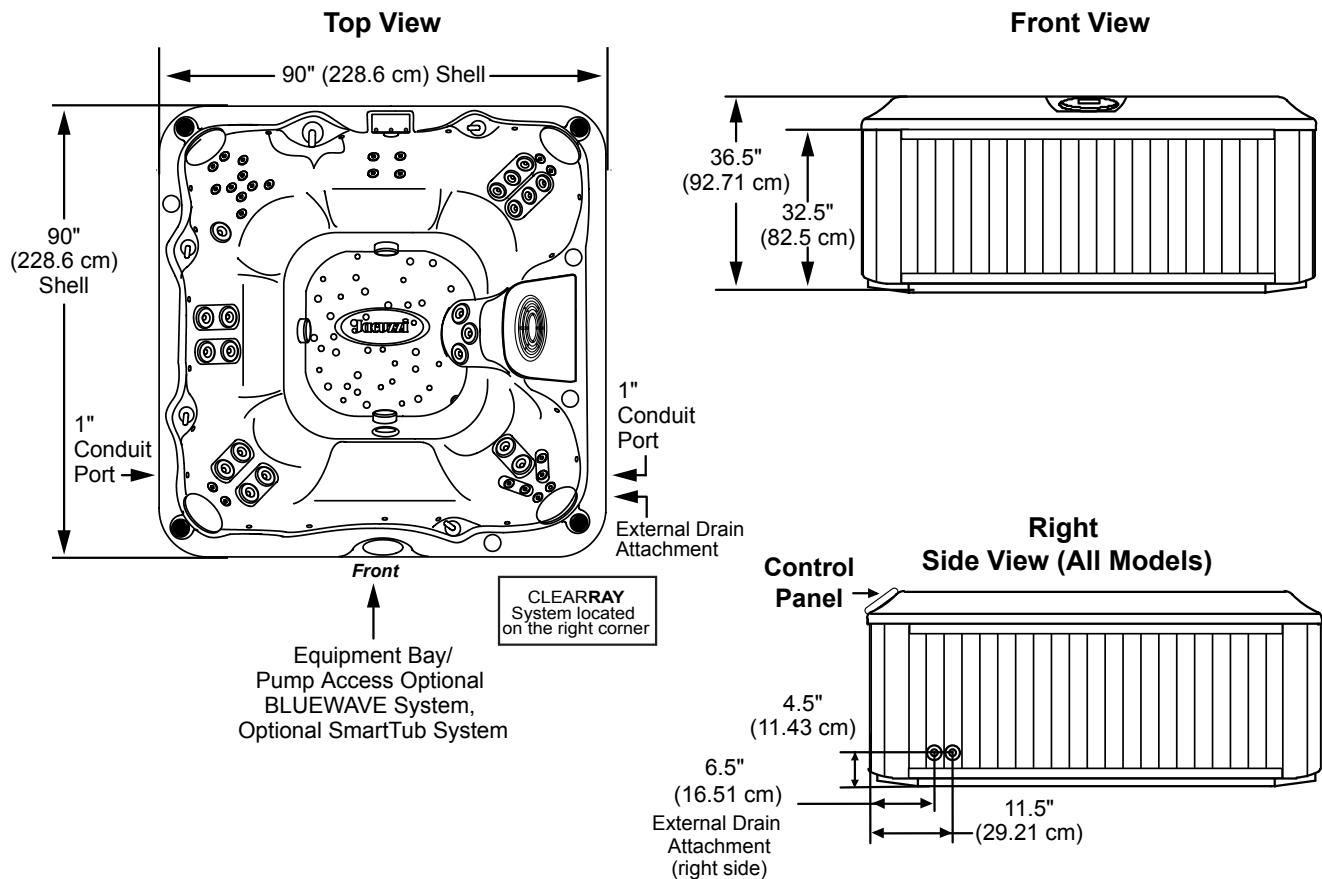

**STOP**

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

**STOP**

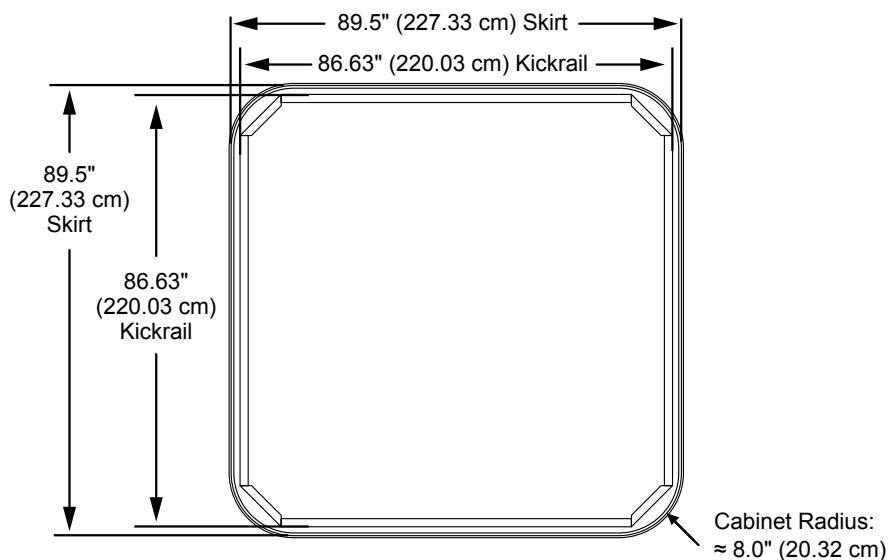


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-275


## Specifications

<b>Seating Capacity</b>	..... 6 Adults
<b>Dimensions</b>	..... 90" x 90" x 36.5" (228.6 cm x 228.6 cm x 92.7 cm); <b>For Complete Dimensions, See page 98</b>
<b>Perimeter</b>	..... 360 in. (814.4 cm)
<b>Dry Weight</b>	..... 807 lbs (366 kg)
<b>Filled Weight (Spa Volume)</b>	..... 5,227 lbs (2,371 kg)
<b>Filled Weight (Average Fill)</b>	..... 4,310 lbs (1,955 kg)
<b>Water Capacity (Spa Volume)</b>	.... 530 US gallons (2,006 Liters)
<b>Water Capacity (Average Fill)</b>	... 420 US gallons (1,590 Liters)
<b>Electronic Controls</b>	..... Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	..... North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): ..... 2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	..... North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): ..... 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	..... No
<b>Total Jets</b>	..... 45
<b>Seat A Jets</b>	..... 2 Classic PRO Directional, 8 Classic PRO Pulsating, 6 Classic PRO Accu-Pressure
<b>Seat B Jets</b>	..... 3 Classic PRO Mini Duo Rotator
<b>Seat C Jets</b>	..... 6 Classic PRO Pulsating, 6 Classic PRO Accu-Pressure
<b>Seat D Jets</b>	..... 2 Classic PRO Power Multiport
<b>Seat E Jets</b>	..... 2 Classic PRO Directional, 2 Classic PRO Duo Rotator
<b>Seat F Jets</b>	..... 2 Classic PRO Accu-Pressure, 2 Classic PRO Duo Rotator
<b>Footwell (G)</b>	..... 4 Classic PRO Directional
<b>Massage Selectors</b>	..... None
<b>Air Controls</b>	..... 3
<b>Water Management System</b>	..... One 50 ft <sup>2</sup> filter cartridge on jets pump 1, Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): ..... Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	..... Classic lighting package of 10 LED lights
<b>Synthetic Cabinet Colors</b>	..... Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	..... 3
<b>Electrical Requirements:</b>	..... North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz): 230 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	..... SmartTub™ Module
<b>Audio System (Optional)</b>	..... N/A
<b>Alternative Insulation (Option):</b>	.. Yes

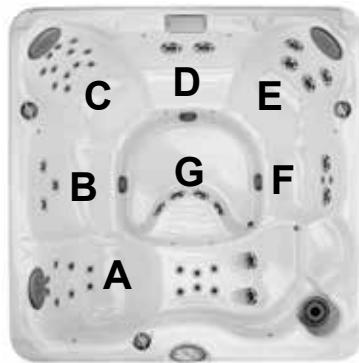

# Jacuzzi J-275

## Operation/Seat Depths

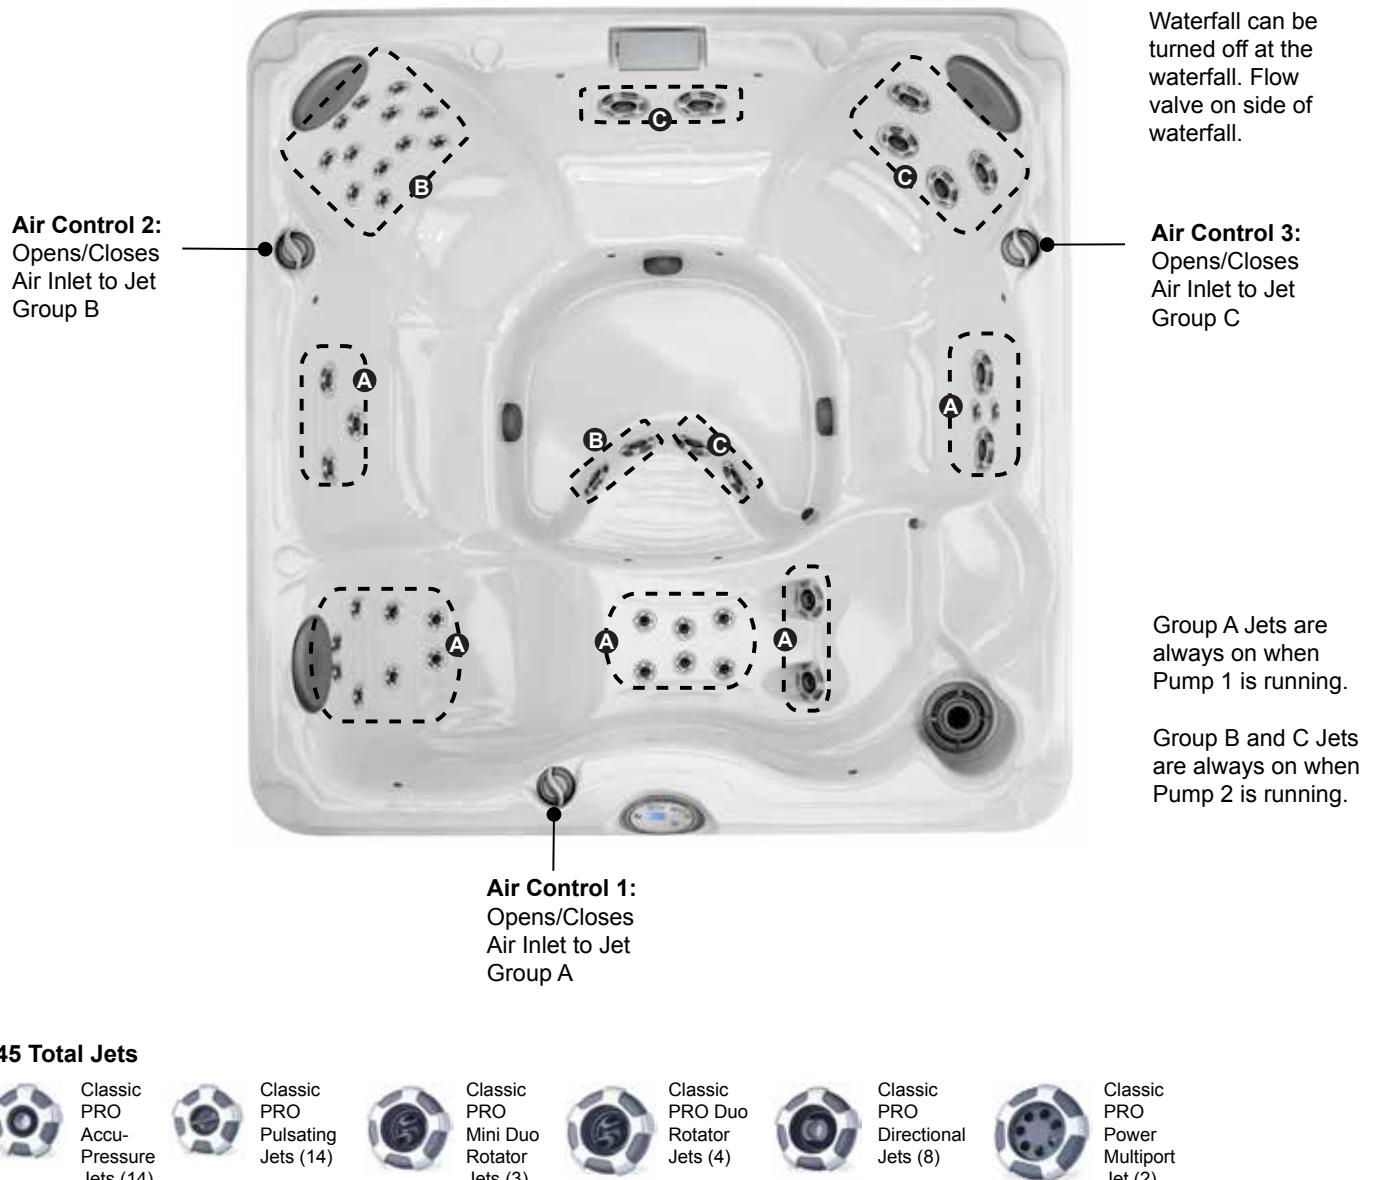

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.50" (64.8 cm)**  
**B = 24.75" (62.9 cm)**  
**C = 26.25" (66.7 cm)**  
**D = 22.00" (55.9 cm)**  
**E = 25.25" (64.1 cm)**  
**F = 23.75" (60.3 cm)**

**G = 7.00" (17.8 cm)**  
**H = 24.50" (62.3 cm)**  
**I = 31.75" (80.6 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-275

## Dimensions

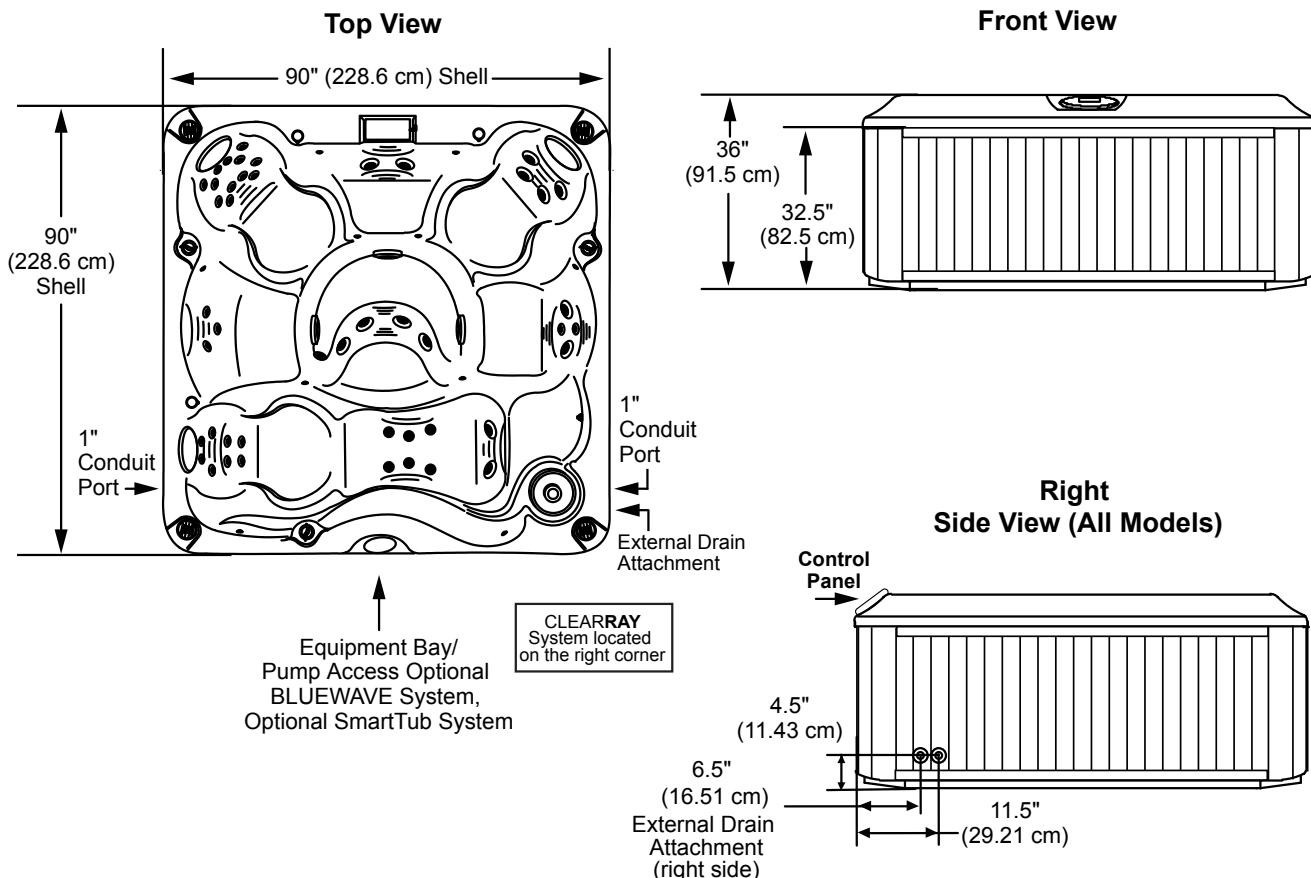

**STOP** **IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

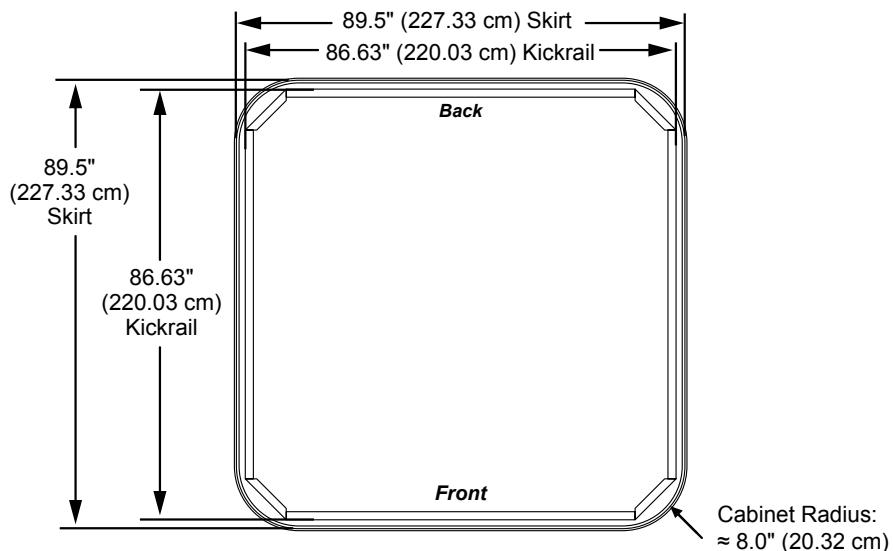

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)


# Jacuzzi J-245

## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm); <b>For Complete Dimensions, See page 98</b>
<b>Perimeter</b>	.....336 in. (853.4 cm)
<b>Dry Weight</b>	.....827 lbs (375 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,747 lbs (2,153 kg)
<b>Filled Weight (Average Fill)</b>	.....3,829 lbs (1,737 kg)
<b>Water Capacity (Spa Volume)</b>	.....470 US gallons (1,779 Liters)
<b>Water Capacity (Average Fill)</b>	.....360 US gallons (1,363 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....No
<b>Total Jets</b>	.....35
<b>Seat A</b>	.....2 Classic PRO Directional, 2 Classic PRO Mini Duo Rotator
<b>Seat B</b>	.....1 Classic PRO Power Multiport
<b>Seat C</b>	.....2 Classic PRO Power Rotator, 2 Classic PRO Pulsating, 4 Classic PRO Accu-Pressure
<b>Seat D</b>	.....2 Classic PRO Power Rotopulse
<b>Seat E</b>	.....2 Classic PRO Duo Rotator, 4 Classic PRO Accu-Pressure
<b>Seat F</b>	.....2 Classic PRO Power Rotator, 4 Classic PRO Accu-Pressure
<b>Footwell (G)</b>	.....8 Classic PRO Accu-Pressure
<b>Massage Selectors</b>	.....None
<b>Air Controls</b>	.....3
<b>Water Management System</b>	.....One 50 ft <sup>2</sup> filter cartridge on jets pump 1, Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz):</b> ..... <b>Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	.....Classic lighting package of 10 LED lights
<b>Synthetic Cabinet Colors</b>	.....Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	.....4
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz):</b> ..... <b>230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo <b>Export (50 Hz):</b> ..... <b>5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub™ Module
<b>Audio System (Optional)</b>	.....N/A
<b>Alternative Insulation (Option):</b>	..Yes

\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

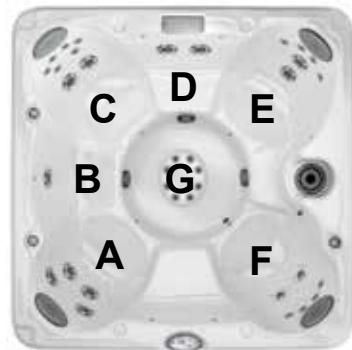

# Jacuzzi J-245

## Operation/Seat Depths



**35 Total Jets**



Classic  
PRO Accu-  
Pressure Jets  
(20)



Classic PRO  
Pulsating  
Jets (2)



Classic  
PRO Mini  
Duo Rotator  
Jets (2)



Classic PRO  
Duo Rotator  
Jets (2)



Classic PRO  
Directional  
Jets (2)



Classic PRO  
Power Roto-  
tor Jets (4)



Classic PRO  
Power Roto-  
pulse Jet (2)



Classic PRO  
Power Multi-  
port Jet (1)


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.75" (65.4 cm)**  
**B = 25.00" (63.5 cm)**  
**C = 26.50" (67.3 cm)**  
**D = 22.00" (55.9 cm)**  
**E = 25.25" (64.1 cm)**  
**F = 26.50" (67.3 cm)**

**G = 16.00" (40.6 cm)**  
**H = 32.00" (81.3 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

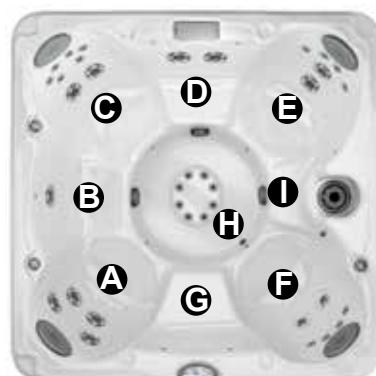


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-245

## Dimensions

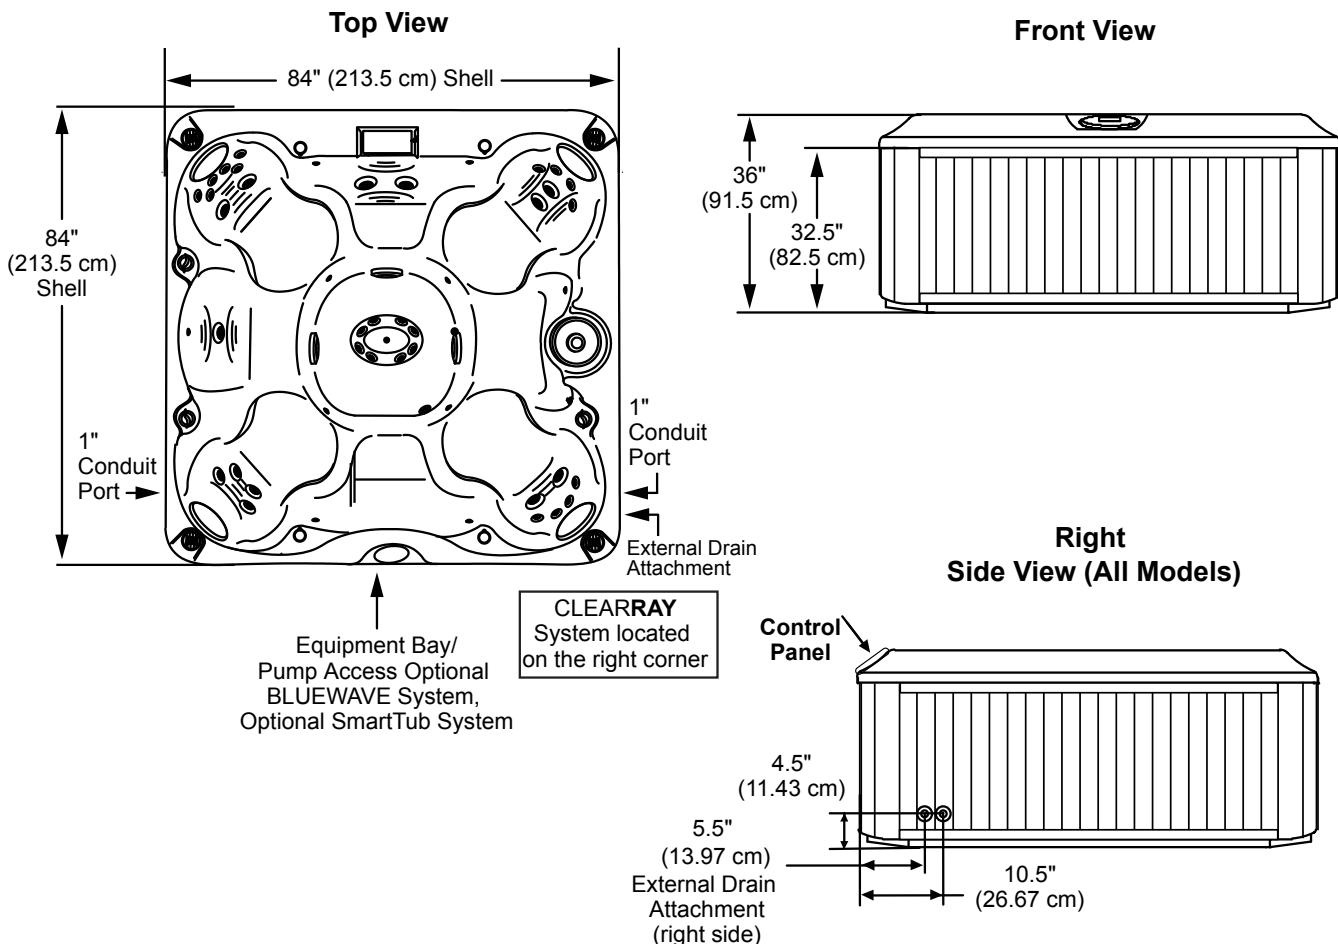

**STOP** **IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

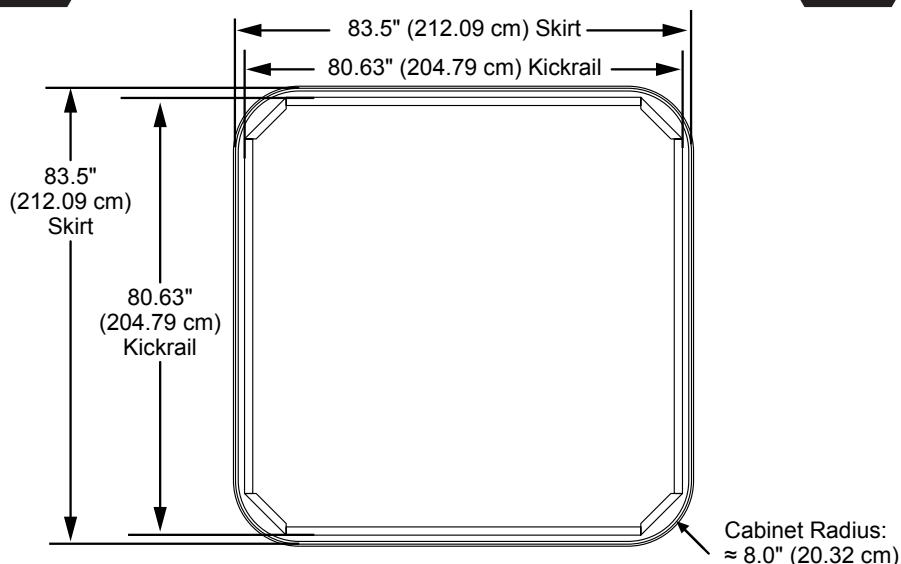


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-235


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	84" x 84" x 36" (213.5 cm x 213.5 cm x 91.5 cm); <b>For Complete Dimensions, See page 98</b>
<b>Perimeter</b>	336 in. (853.4 cm)
<b>Dry Weight</b>	718 lbs (326 kg)
<b>Filled Weight (Spa Volume)</b>	4,554 lbs (2,066 kg)
<b>Filled Weight (Average Fill)</b>	3,720 lbs (1,688 kg)
<b>Water Capacity (Spa Volume)</b>	460 US gallons (1,741 Liters)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	No
<b>Total Jets</b>	35
<b>Seat A Jets</b>	2 Classic PRO Directional, 4 Classic PRO Pulsating, 6 Classic PRO Accu-Pressure
<b>Seat B Jets</b>	2 Classic PRO Power Rotopulse
<b>Seat C Jets</b>	2 Classic PRO Power Rotator, 2 Classic PRO Pulsating, 4 Classic PRO Accu-Pressure
<b>Seat D Jets</b>	1 Classic PRO Power Multiport
<b>Seat E Jets</b>	2 Classic PRO Duo Rotator, 4 Classic PRO Accu-Pressure
<b>Seat F Jets</b>	2 Classic PRO Power Multiport, 1 Classic PRO Duo Rotator
<b>Footwell (G)</b>	3 Classic PRO Directional
<b>Massage Selectors</b>	None
<b>Air Controls</b>	3
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge on jets pump 1, Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	Classic lighting package of 10 LED lights
<b>Synthetic Cabinet Colors</b>	Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	3
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz): 230-240 VAC@20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets, 1 Year Stereo <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module
<b>Audio System (Optional)</b>	N/A
<b>Alternative Insulation (Option):</b>	Yes



# Jacuzzi J-235

## Operation/Seat Depths

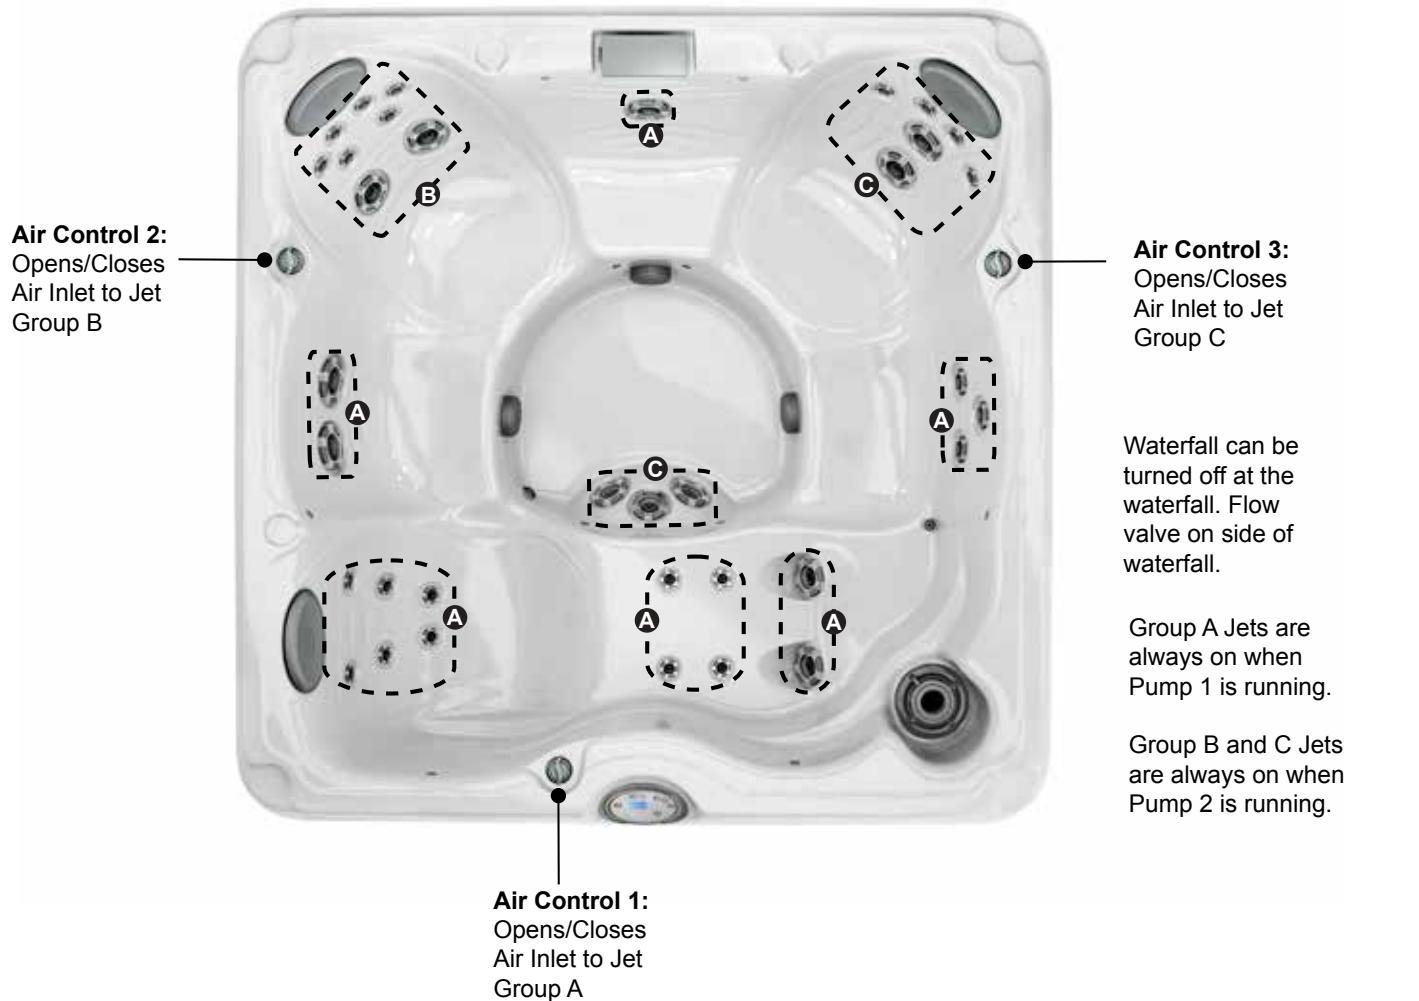

**35 Total Jets**



Classic  
PRO  
Accu-  
Pressure  
Jets (14)



Classic  
PRO  
Pulsating  
Jets (6)



Classic  
PRO  
Duo  
Rotator  
Jets (3)



Classic  
PRO  
Directional  
Jets (5)



Classic  
PRO  
Power  
Rotator  
Jet (2)



Classic  
PRO  
Power  
Rotopulse  
Jet (2)



Classic  
PRO  
Power  
Multiport  
Jet (3)

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.75" (65.4 cm)**

**B = 25.00" (63.5 cm)**

**C = 26.50" (67.3 cm)**

**D = 22.00" (55.9 cm)**

**E = 25.25" (64.1 cm)**

**F = 24.00" (60.9 cm)**

**G = 32.00" (81.3 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-235

## Dimensions

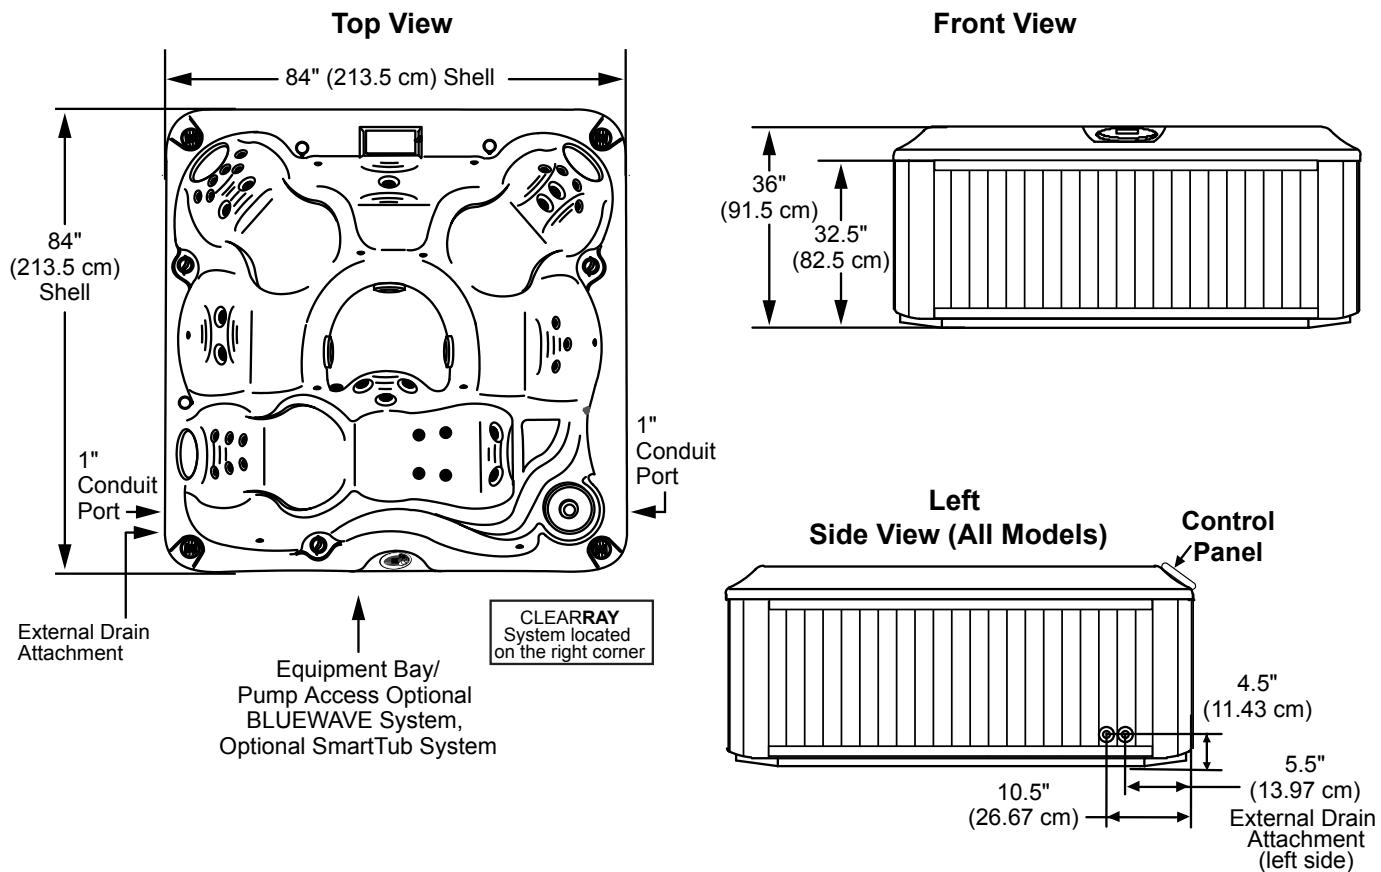

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

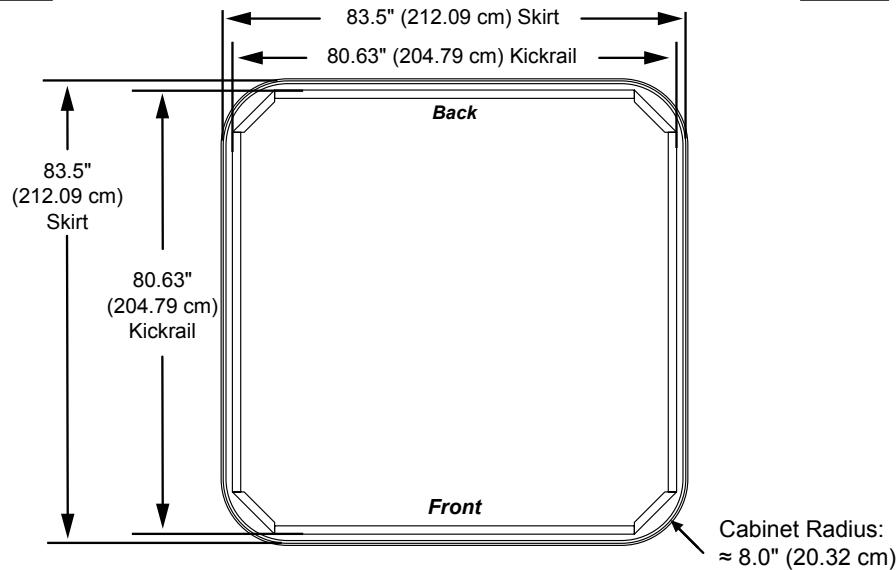


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-225


## Specifications

<b>Seating Capacity</b>	4-5 Adults
<b>Dimensions</b>	84" x 76" x 34.5" (213 cm x 193 cm x 87 cm); <b>For Complete Dimensions, See page 98</b>
<b>Perimeter</b>	320 in. (812.8 cm)
<b>Dry Weight</b>	562 lbs (255 kg)
<b>Filled Weight (Spa Volume)</b>	4,219 lbs (1,914 kg)
<b>Filled Weight (Average Fill)</b>	3,517 lbs (1,596 kg)
<b>Water Capacity (Spa Volume)</b>	438 US gallons (1,658 Liters)
<b>Water Capacity (Average Fill)</b>	354 US gallons (1,340 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	No
<b>Total Jets</b>	23
<b>Seat A Jets</b>	3 Classic Mini
<b>Seat B Jets</b>	6 Classic Mini
<b>Seat C Jets</b>	4 Classic Direct, 2 Classic Luxury
<b>Seat D Jets</b>	4 Classic Rotational
<b>Footwell (E)</b>	4 Classic Euro
<b>Massage Selectors</b>	None
<b>Air Controls</b>	4
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge on jets pump 1, Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>LED Lighting</b>	6 LED bullet lights (4 above water; 2 underwater)
<b>Synthetic Cabinet Colors</b>	Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Sahara, Monaco, Midnight, Porcelain
<b>Headrests</b>	3
<b>Electrical Requirements:</b>	North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A <b>Export (50 Hz): 230-240 VAC@20A or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets, 1 Year Stereo <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub™ Module
<b>Audio System (Optional)</b>	N/A
<b>Alternative Insulation (Option):</b>	Yes

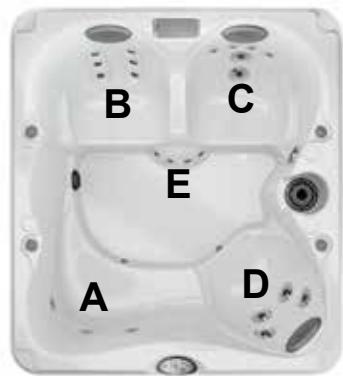

# Jacuzzi J-225

## Operation/Seat Depths

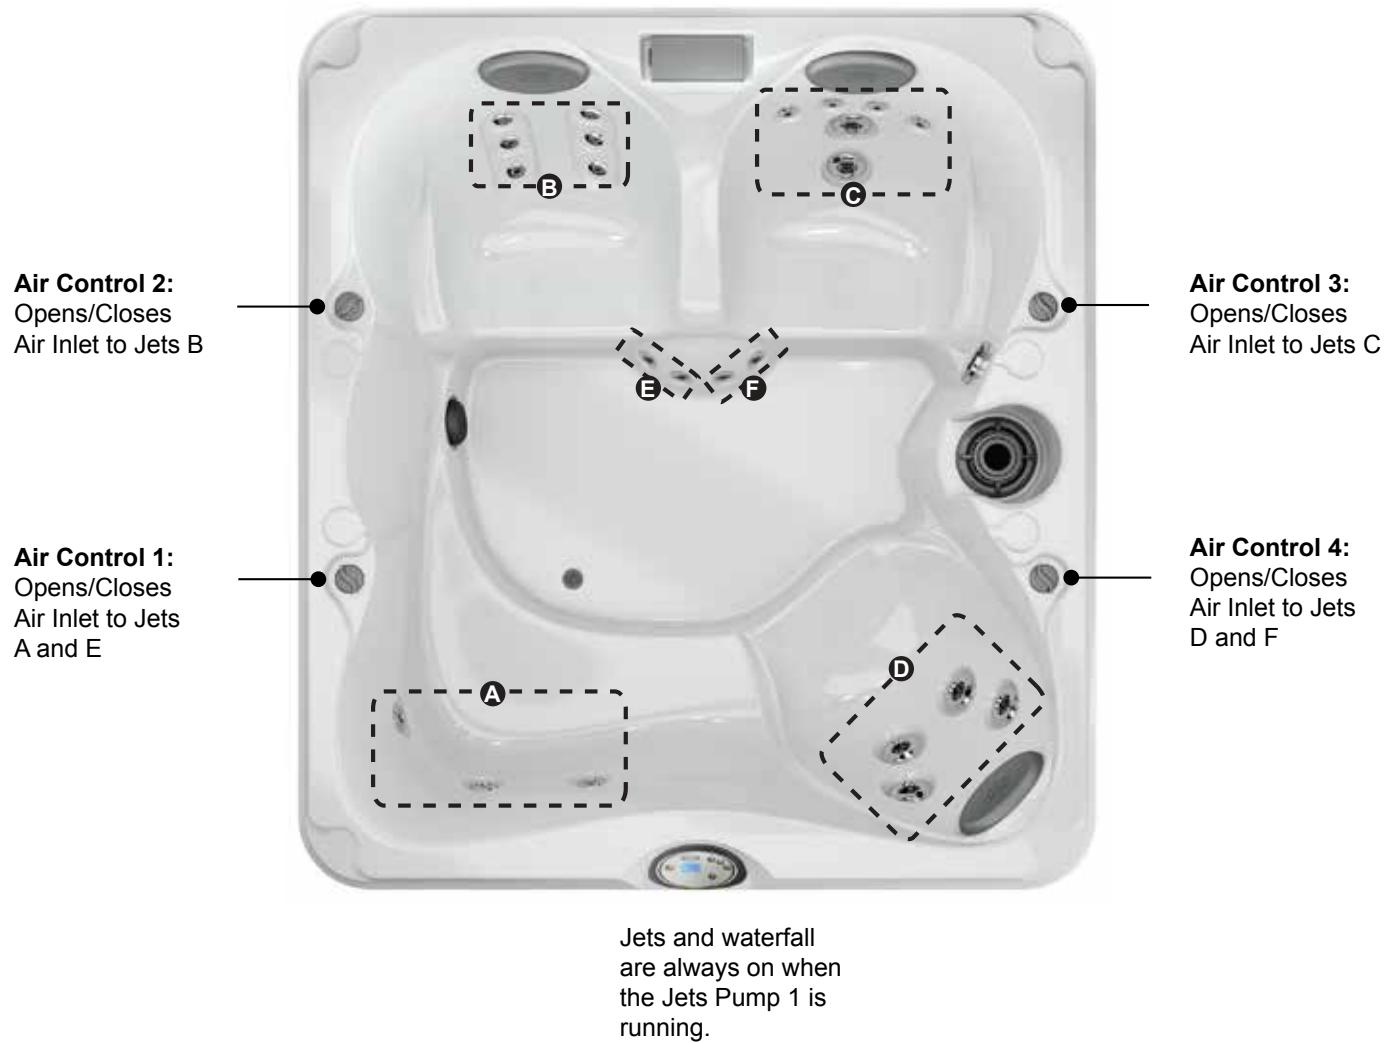

23 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.50" (64.7 cm)**


**B = 27.50" (69.9 cm)**

**C = 27.50" (69.9 cm)**

**D = 27.40" (69.6 cm)**

**E = 30.25" (76.8 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-225

## Dimensions

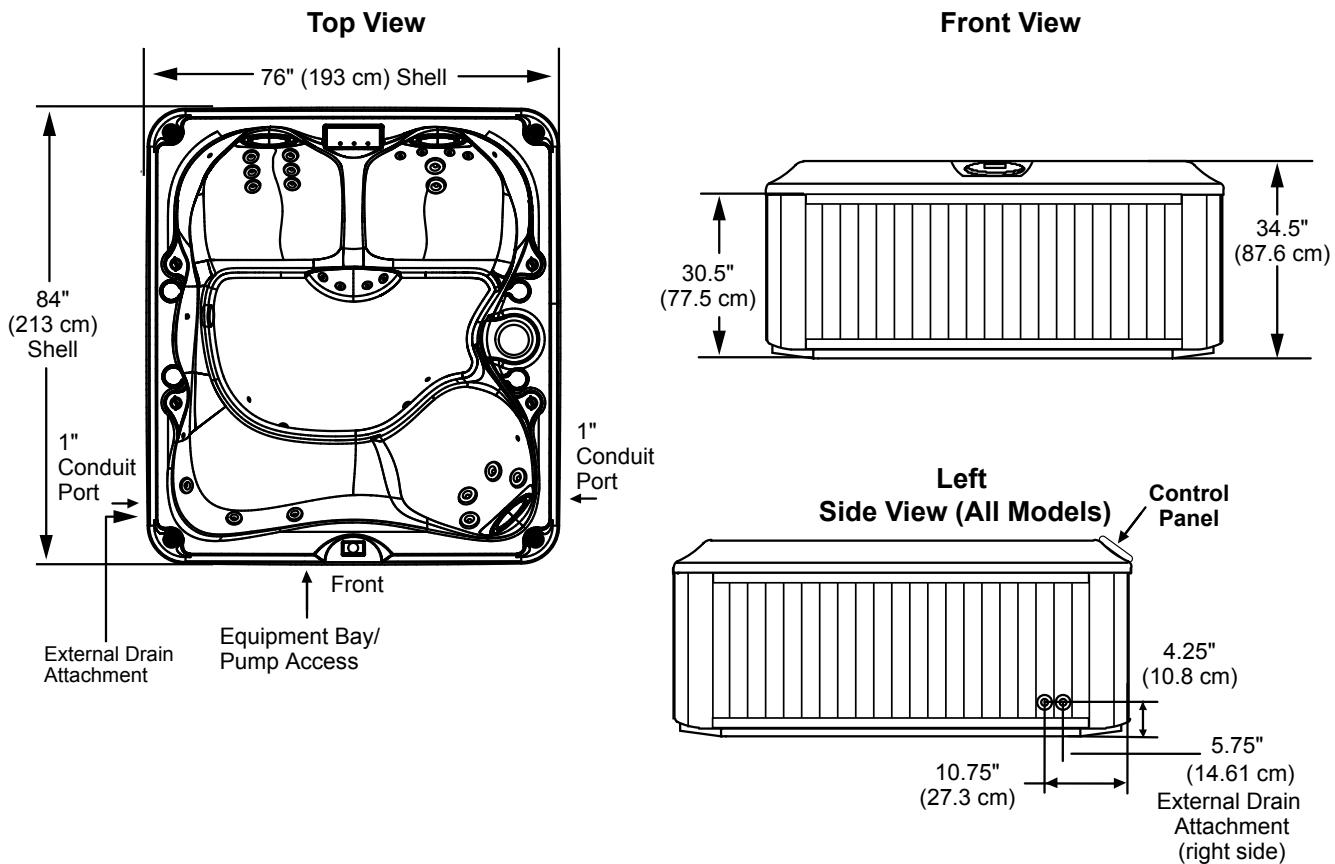

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

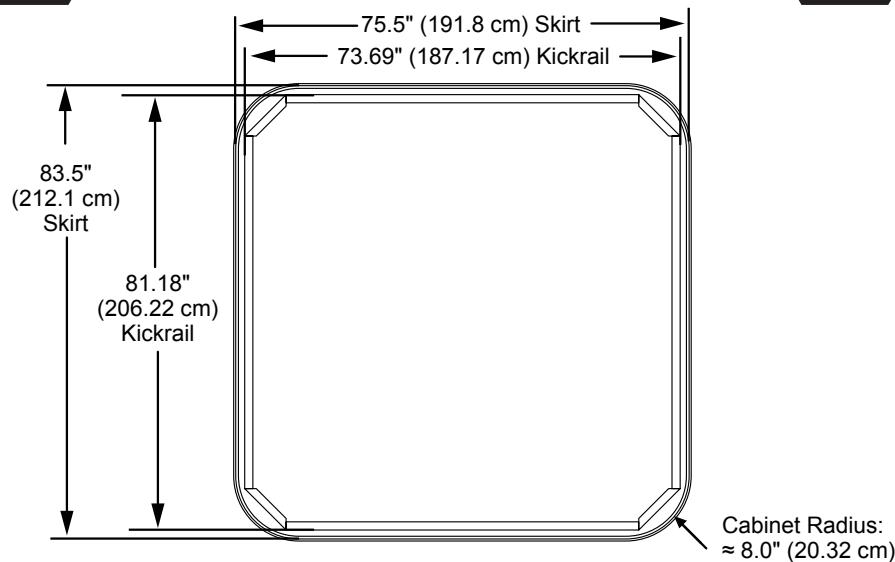


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-210


## Specifications

<b>Seating Capacity</b>	4 Adults
<b>Dimensions</b>	78" Round x 36" Deep (198 cm Round x 91.5 cm); <b>For Complete Dimensions, See page 98</b>
<b>Dry Weight</b>	527 lbs (239 kg)
<b>Filled Weight (Spa Volume)</b>	3,112 lbs (1,412 kg)
<b>Filled Weight (Average Fill)</b>	2,529 lbs (1,147 kg)
<b>Water Capacity (Spa Volume)</b>	310 US gallons (1,173 Liters)
<b>Water Capacity (Average Fill)</b>	240 US gallons (908 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED read-out, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous; 48 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>
<b>Total Jets</b>	19
<b>Seat A</b>	2 Classic Mini, 1 Classic Luxury
<b>Seat B</b>	2 Classic Direct, 2 Classic Mini, 1 Classic Luxury
<b>Seat C</b>	2 Classic Direct, 2 Classic Mini, 1 Classic Luxury
<b>Seat D</b>	2 Classic Mini, 1 Classic Luxury
<b>Divertor Jet (E)</b>	1
<b>Footwell (F)</b>	2 Classic Mini
<b>Air Controls</b>	3
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge; Factory installed CLEARRAY® Active Oxygen System <b>Export (50 Hz): Factory installed CLEARRAY® Active Oxygen System</b>
<b>Lighting</b>	Underwater multi-color LED lights
<b>Synthetic Cabinet Colors</b>	Silverwood, Roasted Chestnut, Brazilian Teak
<b>Acrylic Colors</b>	Platinum, Silver Pearl (Gypsum), Monaco, Midnight, Sahara, Porcelain
<b>Electrical Requirements</b>	North America (60 Hz): 120 VAC@15A or 240 VAC@30A or 40A, <b>Export (50 Hz): 230 VAC@20A or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	SmartTub™ Module
<b>Audio System (Optional)</b>	N/A

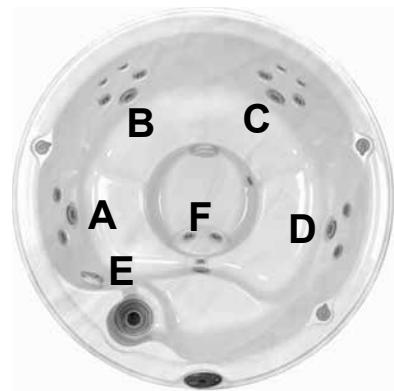

# Jacuzzi J-210

## Operation/Seat Depths

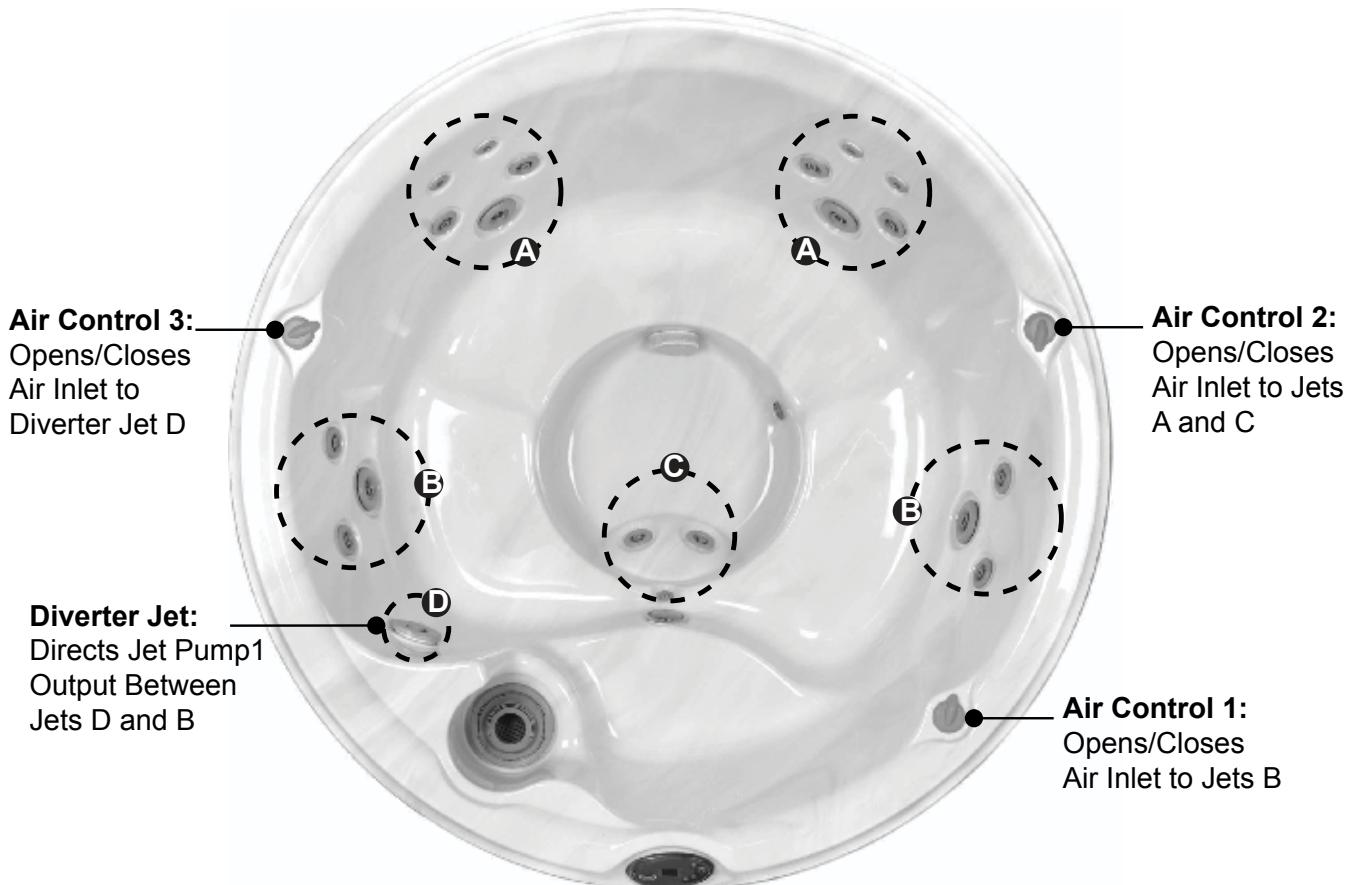

- Jets A and C are Powered Continuously when Jets Pump 1 is running**

19 Total Jets




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 27.00" (68.6 cm)**  
**B = 24.50" (62.2 cm)**  
**C = 16.50" (41.9 cm)**  
**D = 24.50" (62.2 cm)**  
**E = 34.00" (86.4 cm)**




**Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.**  
**Tolerance  $\pm 0.5"$  (1.27 cm).**

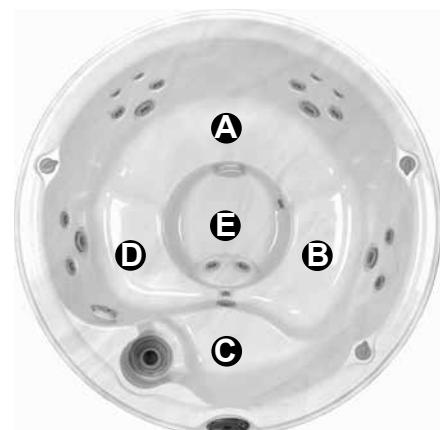


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-210

## Dimensions

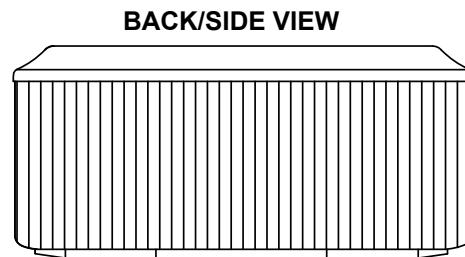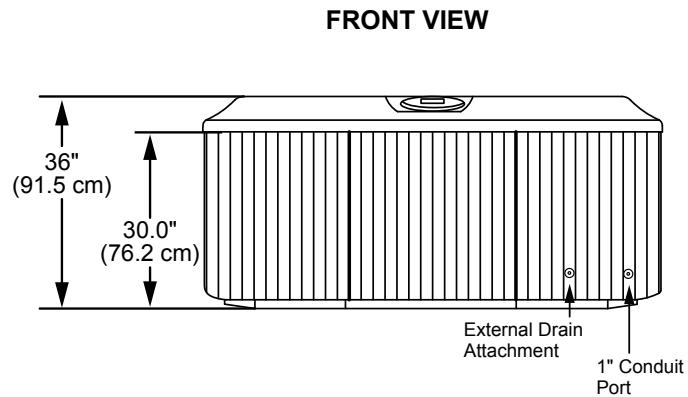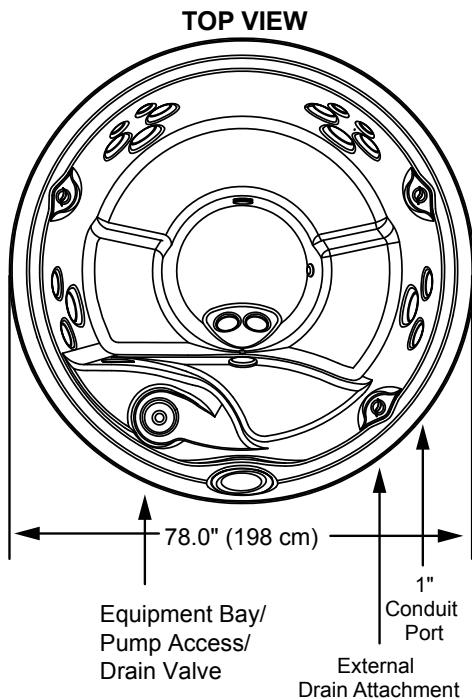

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

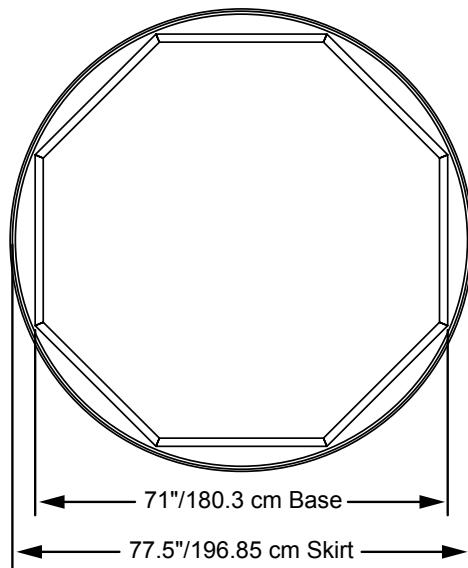

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Soul 40™ Jets


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Perimeter</b>	312 in. (792.5 cm)
<b>Dry Weight</b>	416 lbs (189 kg)
<b>Filled Weight (Spa Volume)</b>	3,894 lbs (1,766 kg)
<b>Filled Weight (Average Fill)</b>	3,001 lbs (1,361 kg)
<b>Water Capacity (Spa Volume)</b>	417 US gallons (1,579 Liters)
<b>Water Capacity (Average Fill)</b>	310 US gallons (1,173 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 2.5 HPR Export (50 Hz): N/A
<b>Pump 2</b>	North America (60 Hz): 2-Speed, 2.0 HPR Export (50 Hz): N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	40
<b>Seat A Jets</b>	6 DirectionalMax1, 6 DirectionalMax2, 3 DirectMiniMax
<b>Seat B Jets</b>	1 DirectionalMax1, 1 DirectMiniMax
<b>Seat C Jets</b>	6 DirectionalMax2, 2 DirectMiniMax
<b>Seat D Jets</b>	2 DirectionalMax1, 2 DirectMiniMax
<b>Seat E Jets</b>	4 DirectionalMax1, 2 DirectionalMax1, 2 DirectMiniMax
<b>Seat F Jets</b>	1 DirectionalMax1
<b>Footwell (G)</b>	2 DirectionalMax1
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	3
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone Export (50 Hz): N/A
<b>LED Lighting</b>	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
<b>Headrests</b>	3
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 4kW Export (50 Hz): N/A
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@50A Export (50 Hz): N/A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights;
<b>Special Features</b>	Optional Suite Package Add-On



# Soul 40 Jets

## Operation/Seat Depths

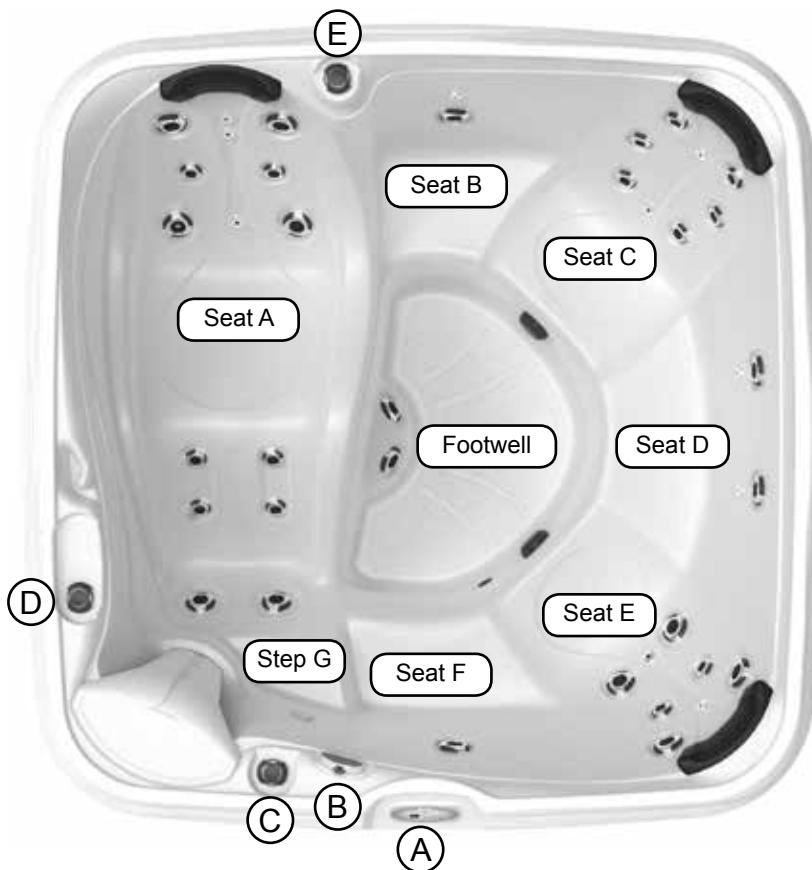

### 40 Total Jets

DirectionalMax1  
Jets (16)

DirectionalMax2  
Jets (14)

DirectMinMax  
Jets (10)



- (A) Topside Control - Activate Jet Pumps, Light and Control Water Temperature
- (B) Water Feature Control - Controls Water Feature Output.
- (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectMinMax Jets), Seat E Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMinMax Jets), Seat F Jets (1 DirectionalMax1 Jets)
- (D) Air Control - Activates Seat A Jets (6 DirectionalMax1 Jets, 6 DirectionalMax2 Jets, 3 DirectMinMax Jets)
- (E) Air Control - Activates Seat B Jets (1 DirectionalMax1 Jet, 1 DirectMinMax Jet), Seat C Jets (6 DirectionalMax2 Jets, 2 DirectMinMax Jets), Footwell Jets (2 DirectionalMax1 Jets)
- Jet Pump 1: Seats B, C, D, E, F and footwell jets
- Jet Pump 2: Seat A

Spa Operation Subject to Change without Notice

**A = 25.75" (65.40 cm)**

**B = 24.50" (62.23 cm)**

**C = 28.00" (71.12 cm)**

**D = 24.75" (62.86 cm)**

**E = 26.50" (67.30 cm)**


**F = 23.25" (59.06 cm)**

**G = 19.00" (48.26 cm)**

**H = 34.50" (87.63 cm)**

### Seat Depths




Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)

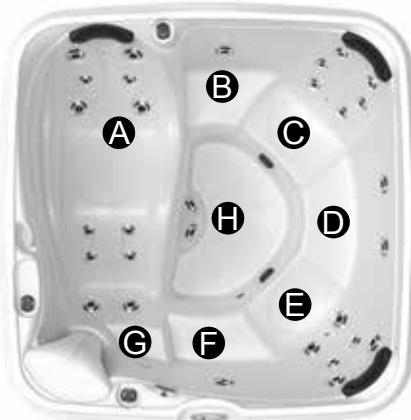


Dimensions/Specifications are Subject to Change Without Notice

# Soul 40 Jets

## Dimensions

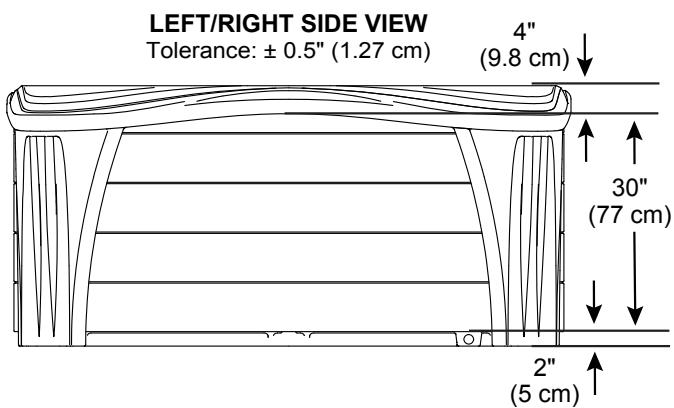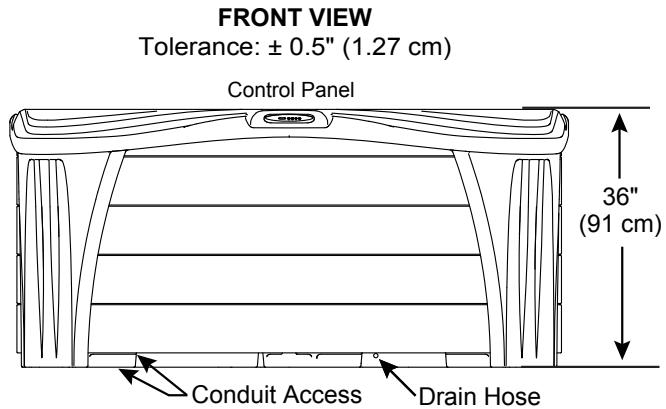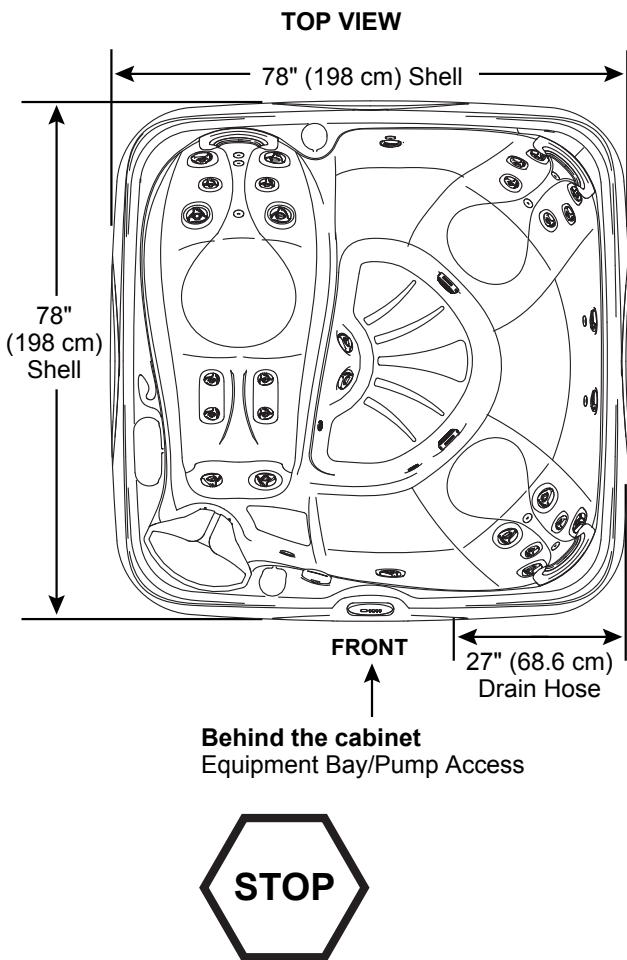

**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

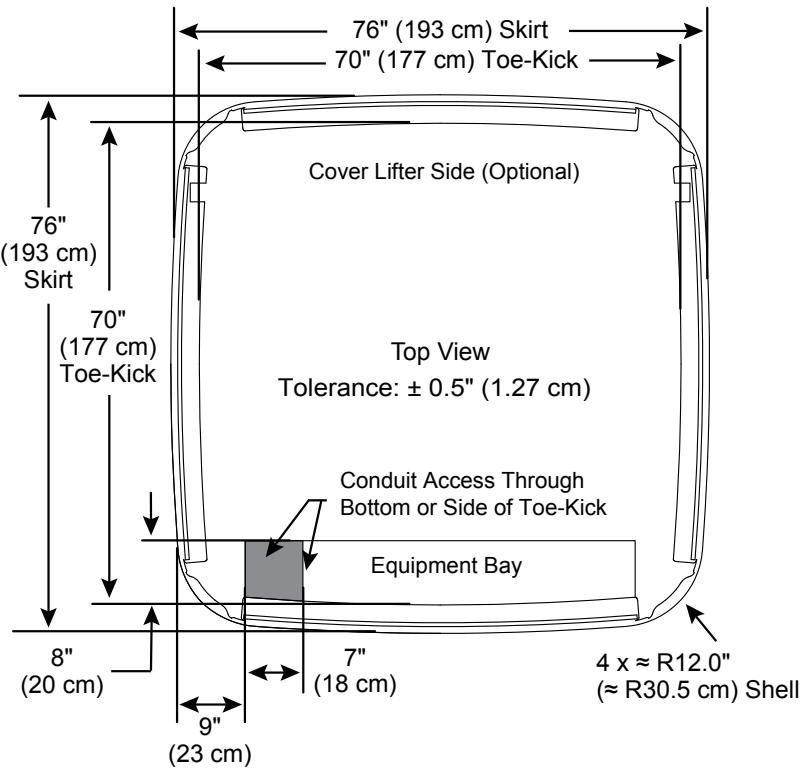


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Soul 30™ Jets


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Perimeter</b>	312 in. (792.5 cm)
<b>Filled Weight (Spa Volume)</b>	3,864 lbs (1,753 kg)
<b>Filled Weight (Average Fill)</b>	2,971 lbs (1,348 kg)
<b>Water Capacity (Spa Volume)</b>	417 US gallons (1,579 Liters)
<b>Water Capacity (Average Fill)</b>	310 US gallons (1,173 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2 kW, 2-Speed
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	30
<b>Seat A Jets</b>	6 DirectionalMax1, 6 DirectionalMax2
<b>Seat B Jets</b>	1 DirectionalMax1
<b>Seat C Jets</b>	6 DirectionalMax2
<b>Seat D Jets</b>	2 DirectionalMax1
<b>Seat E Jets</b>	4 DirectionalMax1, 2 DirectionalMax2
<b>Seat F Jets</b>	1 DirectionalMax1
<b>Footwell (G)</b>	2 DirectionalMax1
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
<b>Headrests</b>	3
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A <b>Export (50 Hz):</b> 230-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights; <b>Export (50 Hz):</b> 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
<b>Special Features</b>	Optional Suite Package Add-On

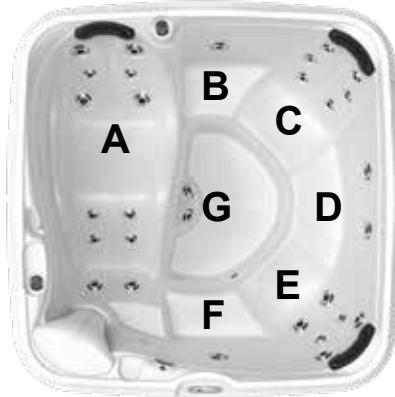

# Soul 30 Jets

## Operation/Seat Depths

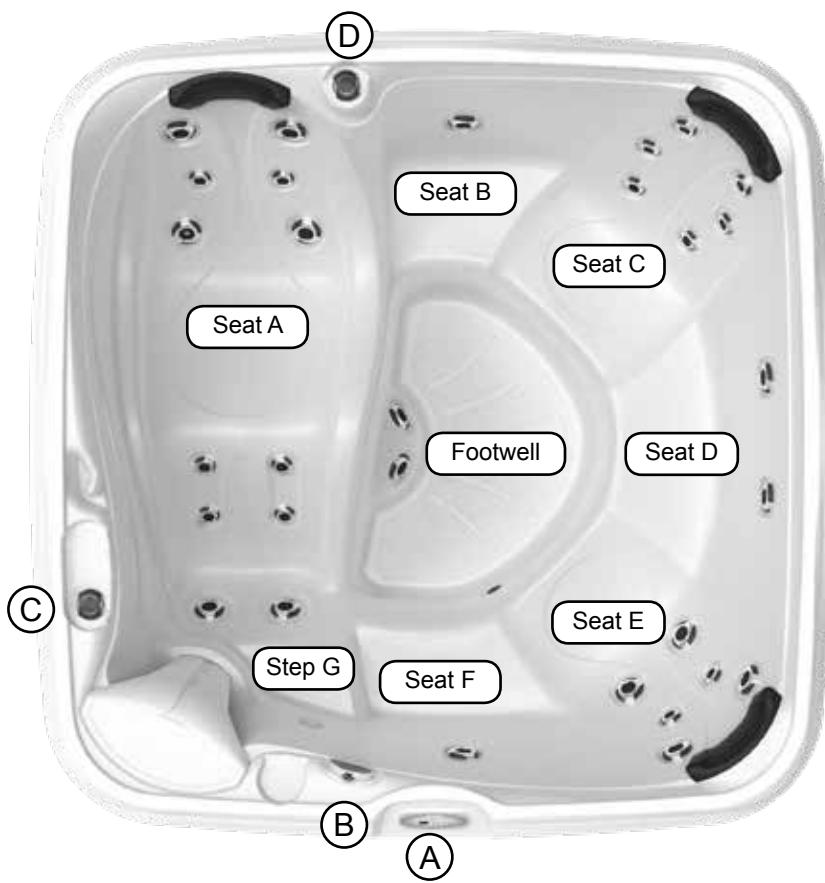

- (A) Topside Control - Activate Jet Pump, Light and Control Water Temperature
- (B) Water Feature Control - Controls Water Feature Output.
- (C) Air Control - Activates Seat A Jets (6 DirectionalMax1 Jets, 6 DirectionalMax2 Jets)
- (D) Air Control - Activates Seat B Jets (1 DirectionalMax1 Jet), Seat C Jets (6 DirectionalMax2 Jets), Seat D Jets (2 DirectionalMax1 Jets), Seat E Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets), Seat F Jets (1 DirectionalMax1 Jet), Footwell Jets (2 DirectionalMax1 Jets)
- Jet Pump 1: All seats and footwell jets

### 30 Total Jets

DirectionalMax1  
Jets (16)



DirectionalMax2  
Jets (14)




Spa Operation Subject to Change without Notice

**A = 25.75" (65.40 cm)**  
**B = 24.50" (62.23 cm)**  
**C = 28.00" (71.12 cm)**  
**D = 24.75" (62.86 cm)**  
**E = 26.50" (67.30 cm)**  
**F = 23.25" (59.06 cm)**  
**G = 19.00" (48.26 cm)**  
**H = 34.50" (87.63 cm)**

Dimensions/Specifications are Subject to Change Without Notice


### Seat Depths

Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)



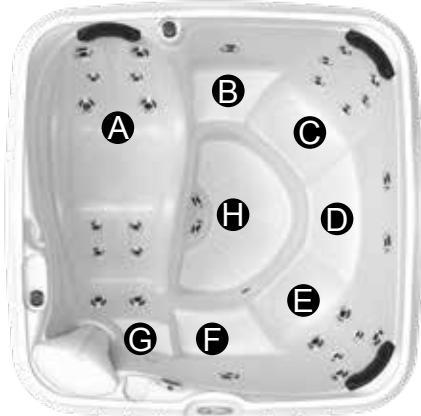


# Soul 30 Jets

## Dimensions

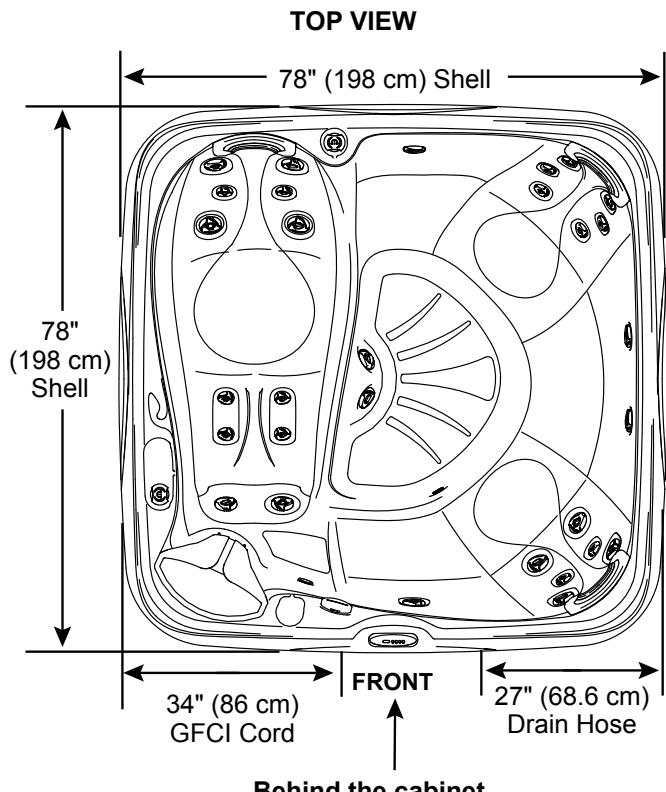

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

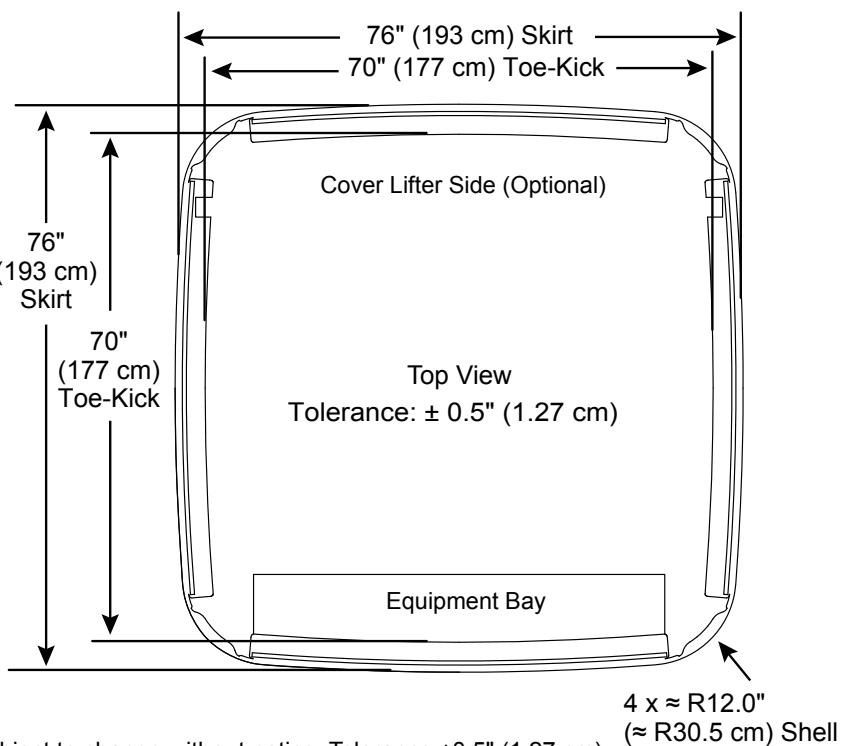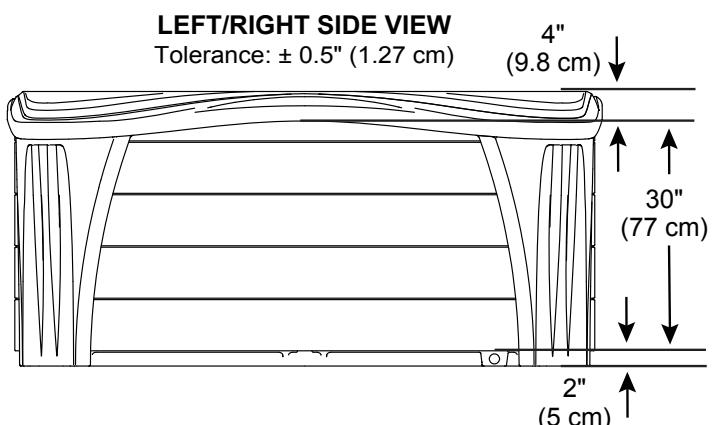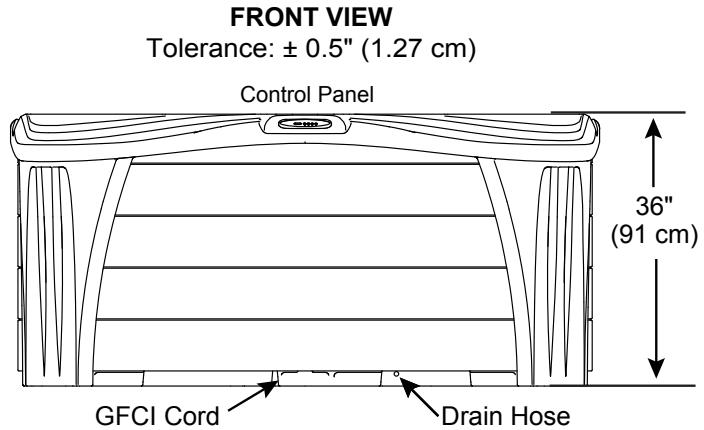


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Echo 40™ Jets


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Perimeter</b>	3612 in. (792.5 cm)
<b>Dry Weight</b>	472 lbs (214 kg)
<b>Filled Weight (Spa Volume)</b>	4,175 lbs (1,894 kg)
<b>Filled Weight (Average Fill)</b>	3,208 lbs (1,455 kg)
<b>Water Capacity (Spa Volume)</b>	444 US gallons (1,681 Liters)
<b>Water Capacity (Average Fill)</b>	328 US gallons (1,242 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 2.5 HPR Export (50 Hz): N/A
<b>Pump 2</b>	North America (60 Hz): 2-Speed, 2.0 HPR Export (50 Hz): N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	40
<b>Seat A Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMinMax Jets
<b>Seat B Jets</b>	2 DirectionalMax1 Jets
<b>Seat C Jets</b>	8 DirectionalMax2 Jets, 4 DirectMinMax Jets
<b>Seat D Jets</b>	6 DirectionalMax2 Jets, 2 DirectMinMax Jets
<b>Seat E Jets</b>	2 DirectionalMax1 Jets
<b>Seat F Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMinMax Jets
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	3
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone Export (50 Hz): N/A
<b>LED Lighting</b>	Multicolor waterfall light; Exterior corner light (white color only)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
<b>Headrests</b>	4
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW Export (50 Hz): N/A
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@30A or 40A Export (50 Hz): N/A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights;
<b>Special Features</b>	N/A

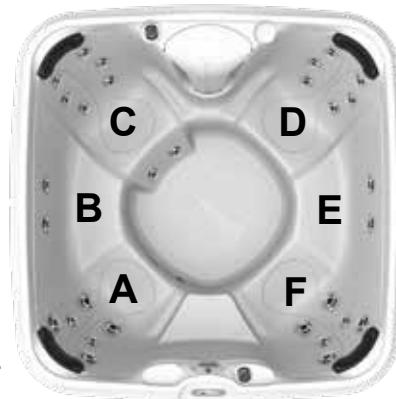

# Echo 40 Jets

## Operation/Seat Depths

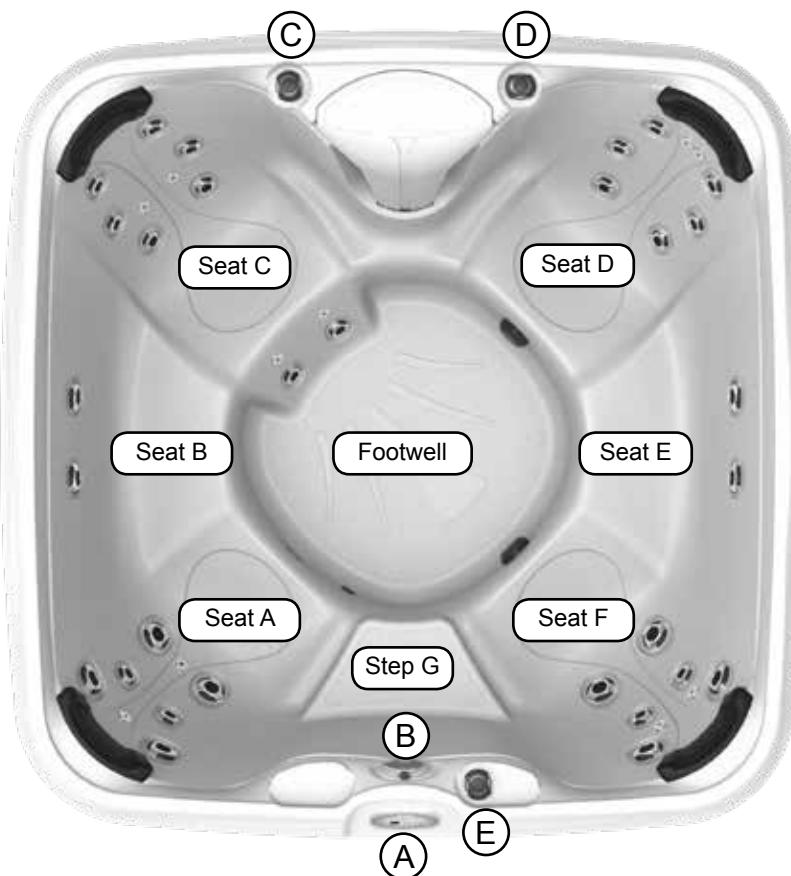

**40 Total Jets**

DirectionalMax1  
Jets (12)

DirectionalMax2  
Jets (18)

DirectMinMax  
Jets (10)



- (A) Topside Control - Activate Jet Pumps, Light and Control Water Temperature
- (B) Water Feature Control - Controls Water Feature Output.
- (C) Air Control - Activates Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (8 DirectionalMax2 Jets, 4 DirectMinMax Jets)
- (D) Air Control - Activates Seat D Jets (6 DirectionalMax2 Jets, 2 Direct-Minimax Jets), Seat E Jets (2 DirectionalMax1 Jets)
- (E) Air Control - Activates Seat A Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMinMax Jets), Seat F Jets (4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMinMax Jets)
  - Jet Pump 1: Seats A, D, E and F
  - Jet Pump 2: Seats B and C

Spa Operation Subject to Change without Notice

**A = 26.50" (67.30 cm)**

**B = 24.75" (62.86 cm)**

**C = 28.00" (71.12 cm)**

**D = 28.00" (71.12 cm)**

**E = 24.75" (62.86 cm)**


**F = 26.50" (67.30 cm)**

**G = 20.00" (50.80 cm)**

**H = 34.50" (87.63 cm)**

## Seat Depths




Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)

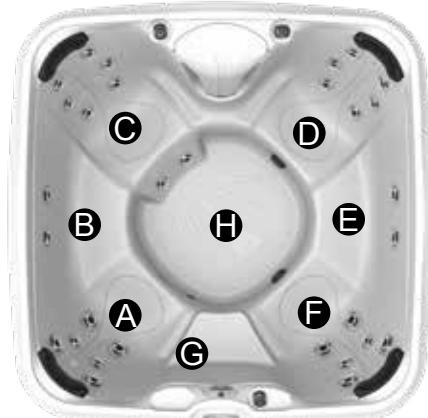


Dimensions/Specifications are Subject to Change Without Notice

# Echo 40 Jets

## Dimensions

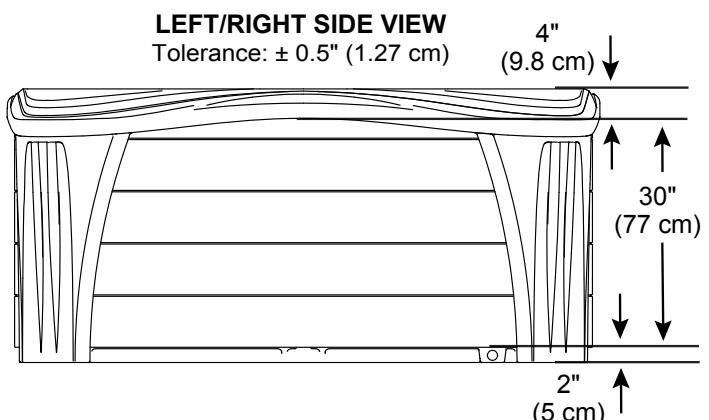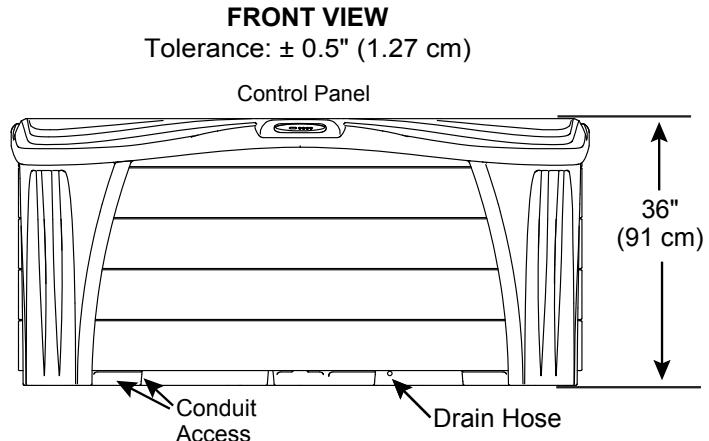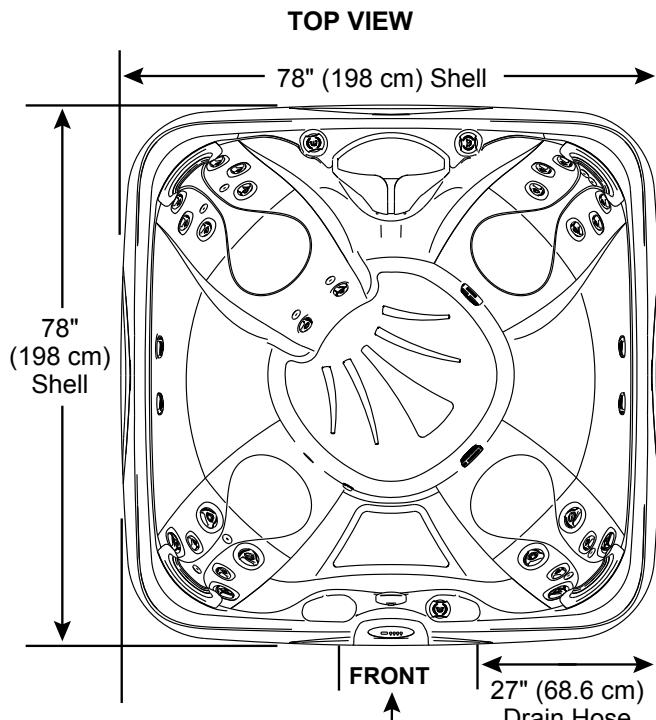

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

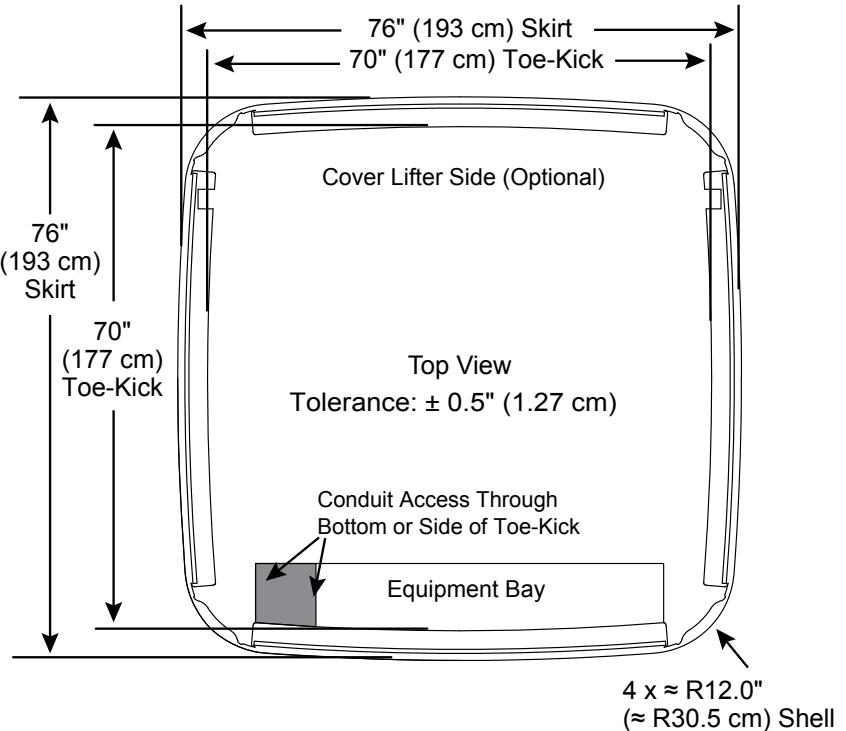

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Echo 30™ Jets


## Specifications

<b>Seating Capacity</b>	7 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Perimeter</b>	312 in. (714.7 cm)
<b>Dry Weight</b>	414 lbs (187 kg)
<b>Filled Weight (Spa Volume)</b>	4,117 lbs (1,867 kg)
<b>Filled Weight (Average Fill)</b>	3,150 lbs (1,429 kg)
<b>Water Capacity (Spa Volume)</b>	444 US gallons (1,681 Liters)
<b>Water Capacity (Average Fill)</b>	328 US gallons (1,242 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2 kW, 2-Speed
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	30
<b>Seat A Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
<b>Seat B Jets</b>	2 DirectionalMax1 Jets
<b>Seat C Jets</b>	8 DirectionalMax2 Jets
<b>Seat D Jets</b>	6 DirectionalMax2 Jets
<b>Seat E Jets</b>	2 DirectionalMax1 Jets
<b>Seat F Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor waterfall light; Exterior corner light (white color only)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
<b>Headrests</b>	4
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A <b>Export (50 Hz):</b> 230-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights; <b>Export (50 Hz):</b> 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
<b>Special Features</b>	N/A



# Echo 30 Jets

## Operation/Seat Depths

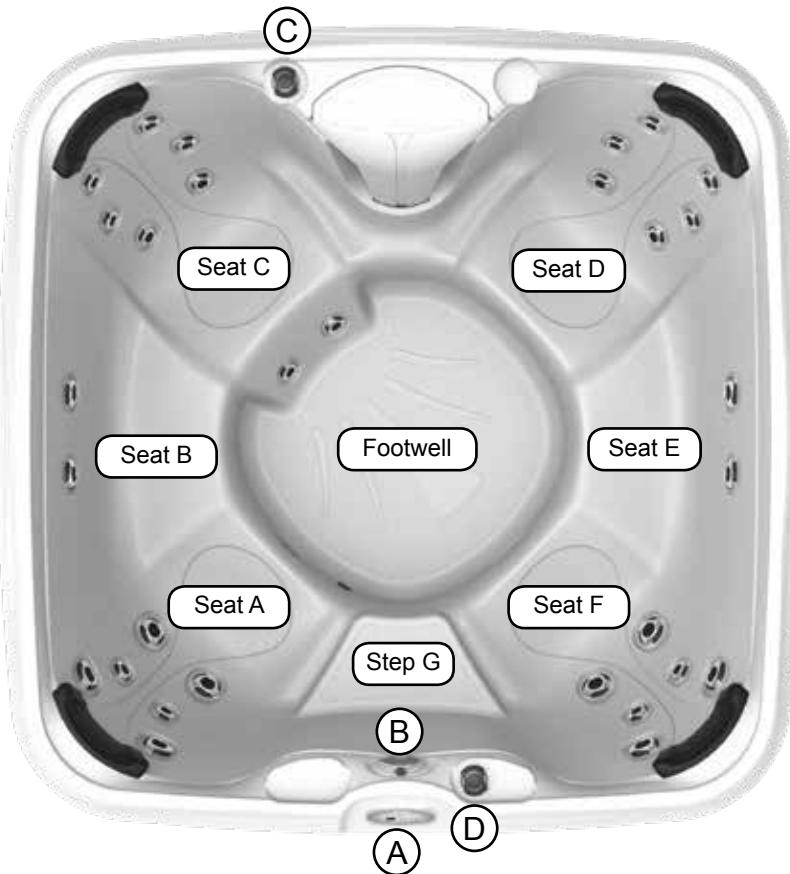

### 30 Total Jets

DirectionalMax1  
Jets (12)

DirectionalMax2  
Jets (18)



Spa Operation Subject to Change without Notice

**A = 26.50" (67.30 cm)**

**B = 24.75" (62.86 cm)**

**C = 28.00" (71.12 cm)**

**D = 28.00" (71.12 cm)**

**E = 24.75" (62.86 cm)**

**F = 26.50" (67.30 cm)**

**G = 20.00" (50.80 cm)**

**H = 34.50" (87.63 cm)**

## Seat Depths

Listed dimensions represent distance from top of spa to lowest point in seat.




Tolerance:  $\pm 0.5"$  (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

# Echo 30 Jets

## Dimensions

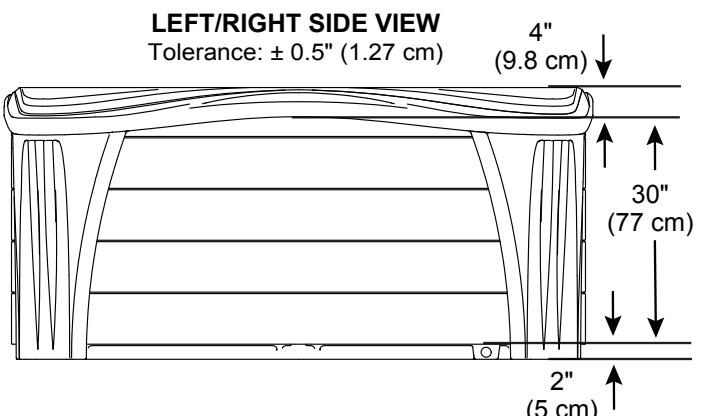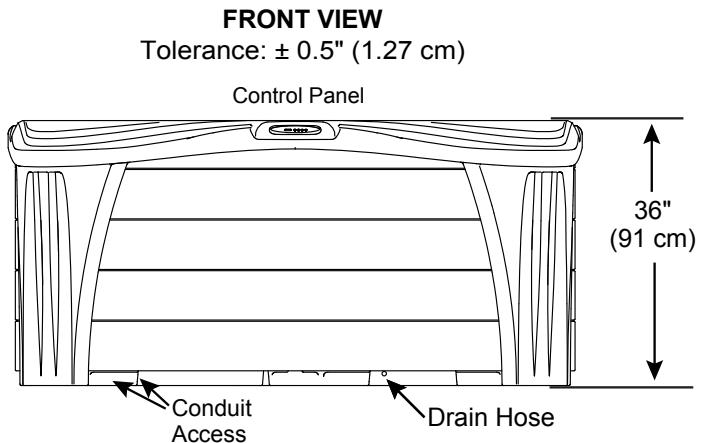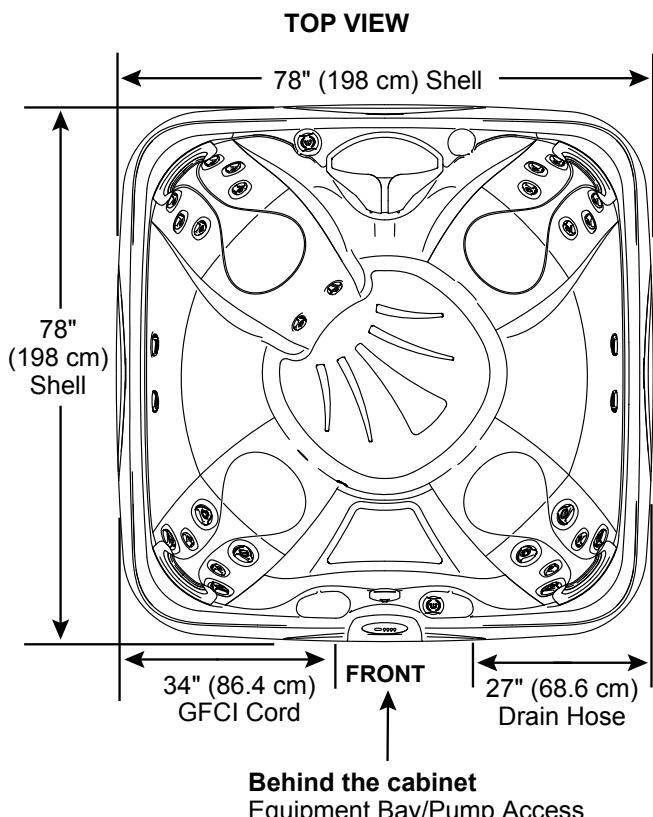

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

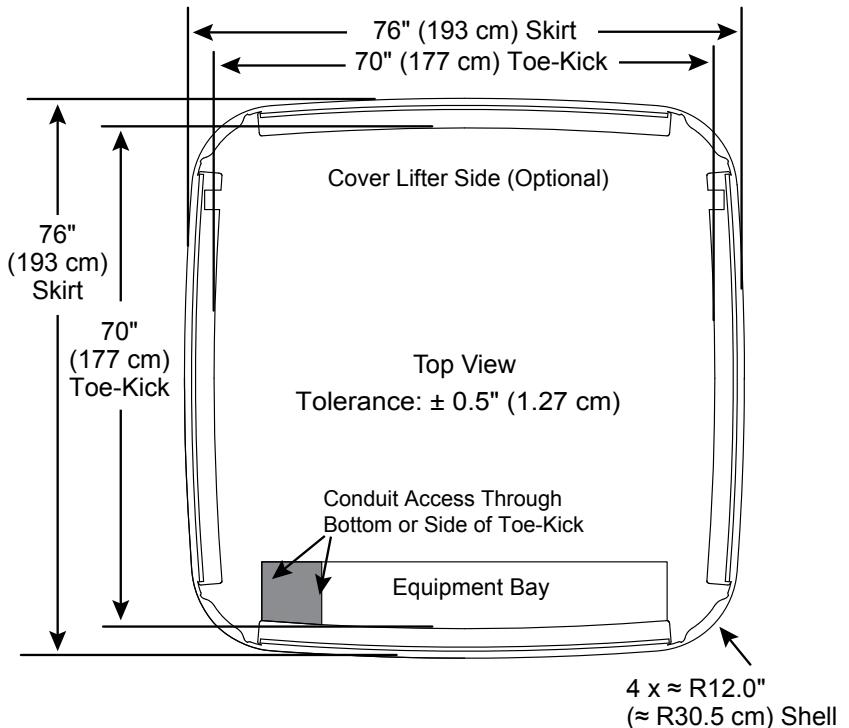


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Mood 20™ Jets


## Specifications

<b>Seating Capacity</b>	5 Adults
<b>Dimensions</b>	78" x 68" x 32" (198 cm x 173 cm x 81 cm);
<b>Perimeter</b>	292 in. (741.7 cm)
<b>Dry Weight</b>	285 lbs (129 kg)
<b>Filled Weight (Spa Volume)</b>	3,120 lbs (1,415 kg)
<b>Filled Weight (Average Fill)</b>	2,404 lbs (1,090 kg)
<b>Water Capacity (Spa Volume)</b>	340 US gallons (1,287 Liters)
<b>Water Capacity (Average Fill)</b>	254 US gallons (961 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2-Speed, 1.5 HPR
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	20
<b>Seat A Jets</b>	1 DirectionalMax1, 1 DirectionalMax2
<b>Seat B Jets</b>	2 DirectionalMax1
<b>Seat C Jets</b>	1 DirectionalMax1, 1 DirectionalMax2
<b>Seat D Jets</b>	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
<b>Seat E Jets</b>	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
<b>Footwell (F) Jets</b>	2 DirectionalMax1
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle, Tuscan Sparkle, Night Sparkle, Glacier Sparkle
<b>Headrests</b>	2
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A <b>Export (50 Hz):</b> 230-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 5 Years Shell Surface, 1 Year Plumbing Component Leaks, 1 Year Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 1 Year Lights; <b>Export (50 Hz):</b> 5 Years Shell, 5 Years Shell Surface, 2 Years Plumbing Component Leaks, 2 Years Equipment and Controls, 2 Years Cabinet, 2 Years Jets, 2 Years Lights;
<b>Special Features</b>	Optional Suite Package Add-On

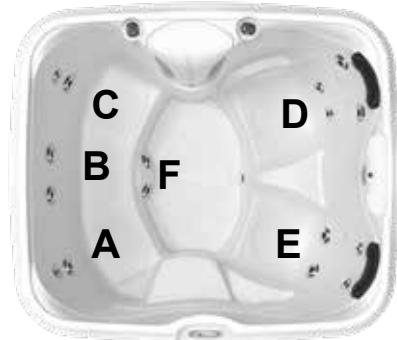

# Mood 20 Jets

## Operation/Seat Depths

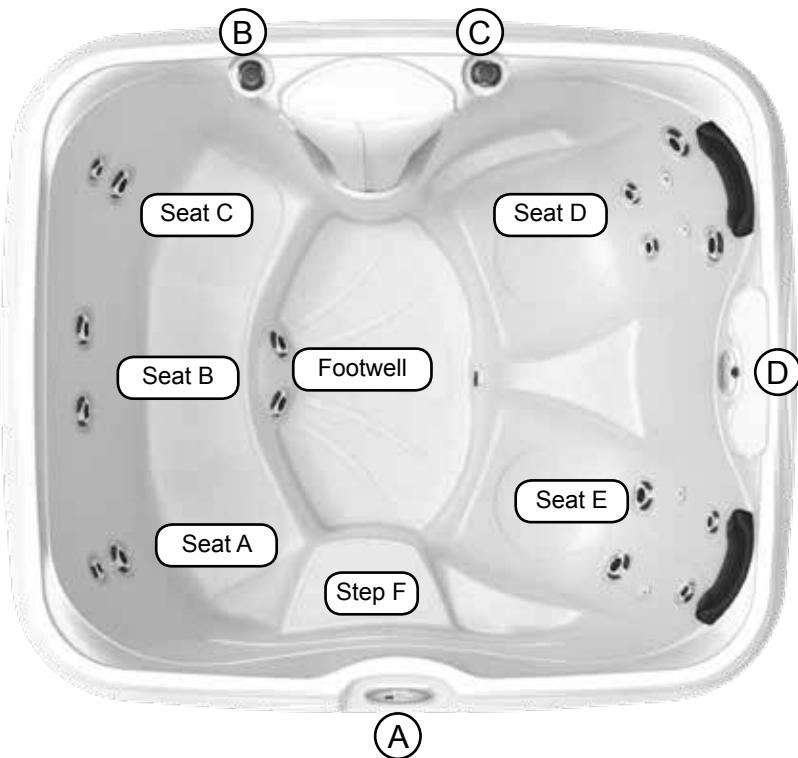

- (A) Topside Control - Activate Jets Pump, Light and Control Water Temperature
- (B) Air Control - Activates Seat A Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Footwell Jets (2 DirectionalMax2 Jets)
- (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)
- (D) Water Feature Control - Controls Water Feature Output.

- Jet Pump 1: All seats and footwell jets

### 20 Total Jets

DirectionalMax1 Jets (10)	DirectionalMax2 Jets (6)	DirectMiniMax Jets (4)
------------------------------	-----------------------------	---------------------------



Spa Operation Subject to Change without Notice

**A = 26.50" (67.31 cm)**  
**B = 26.25" (66.68 cm)**  
**C = 26.50" (67.31 cm)**  
**D = 26.25" (66.68 cm)**  
**E = 28.30" (71.87 cm)**  
**F = 18.00" (45.72 cm)**  
**G = 30.50" (77.47 cm)**

### Seat Depths




Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

# Mood 20 Jets

## Dimensions

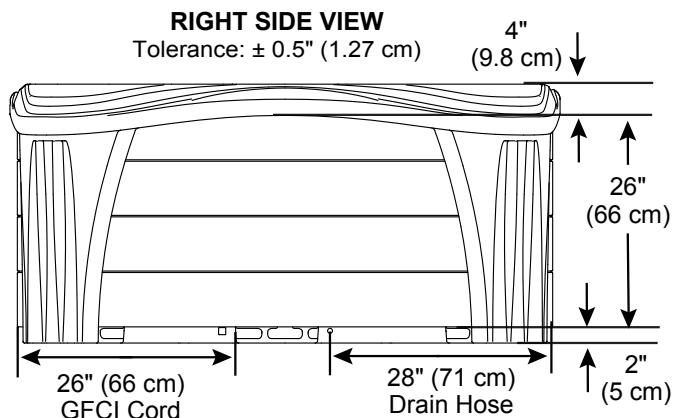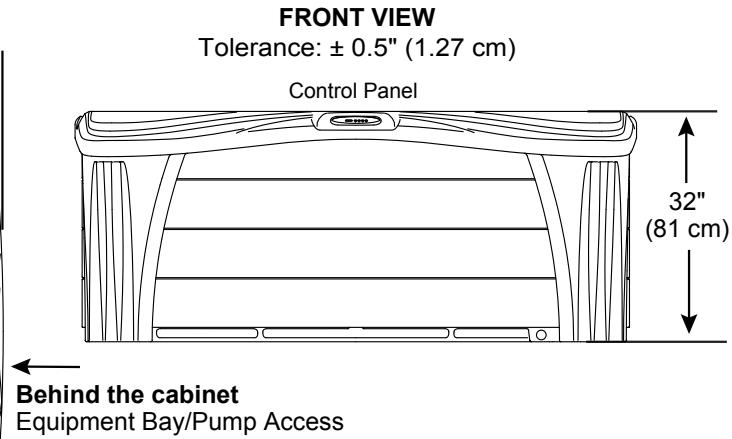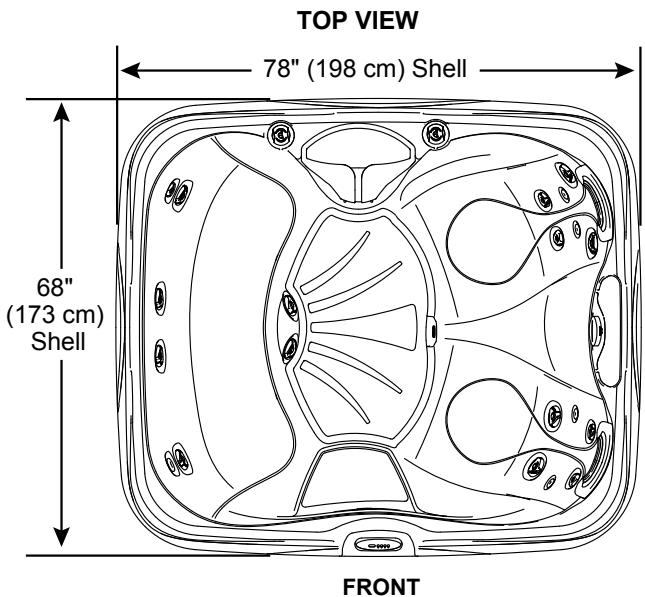

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

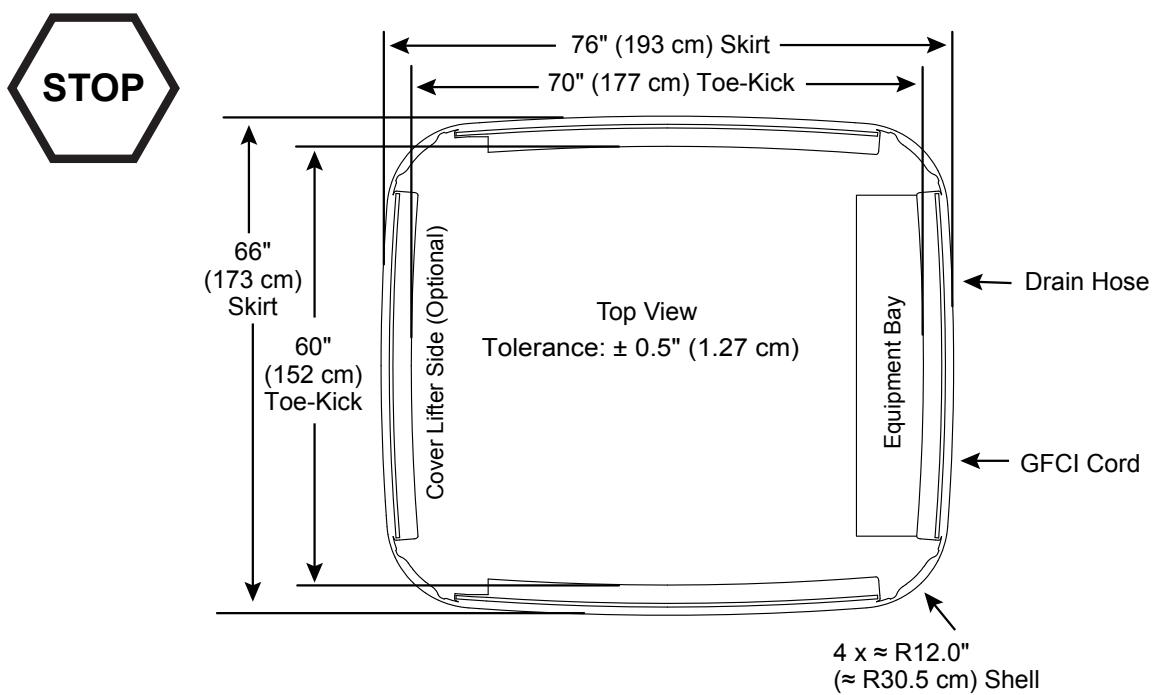


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Complete Dimensions - J500 Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-575	91.0" (231.1 cm)	91.0" (231.1 cm)	5.25" (13.3 cm)	9.5" (24.13 cm)	53.0" (134.6 cm)	19.0" (48.3 cm)
J-585						
DIMENSIONS G-I (All measurements are an approximate)						
	G	H	I	J	CLEARRAY®	 <p><b>IMPORTANT!</b> Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.</p>
J-575	28.25" (71.8 cm)	37.5" (95.25 cm)	42.0" (107.0 cm)	Front Right	Front Center	
J-585						
DIMENSIONS K-O (All measurements are an approximate)						
	K	L	M	N	O	
J-575	4.0" (10.16 cm)	8.5" (21.6 cm)	3.25" (8.3 cm)	36.75" (93.3 cm)	3.0" (7.62 cm)	
J-585						

- Dimensions Subject to Change Without Notice -


Spa Top View

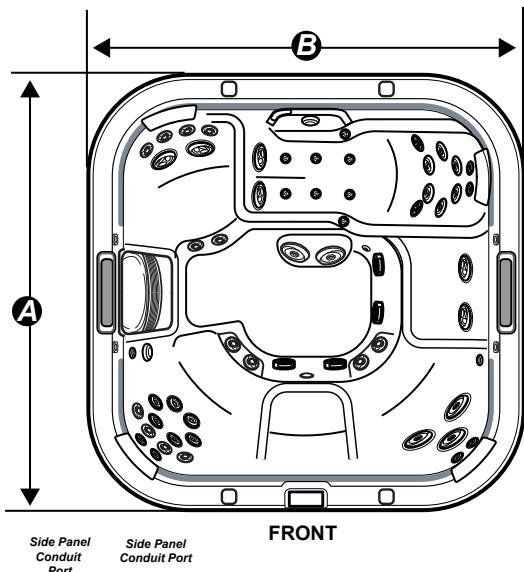


Left/Right Side View  
Tolerance: ± 0.5" (1.27 cm)

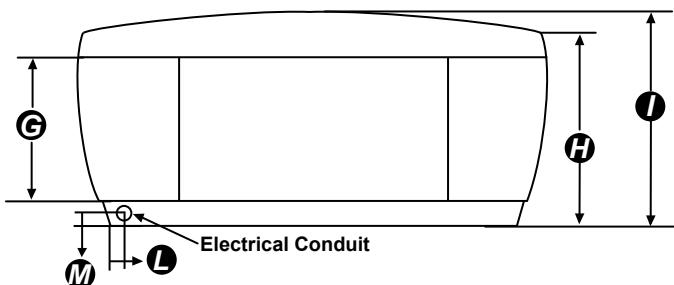

Control Panel Side View  
Tolerance: ± 0.5" (1.27 cm)

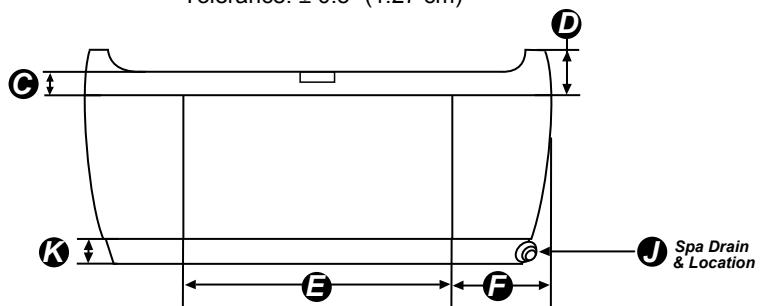

Tolerance: ± 0.5" (1.27 cm)

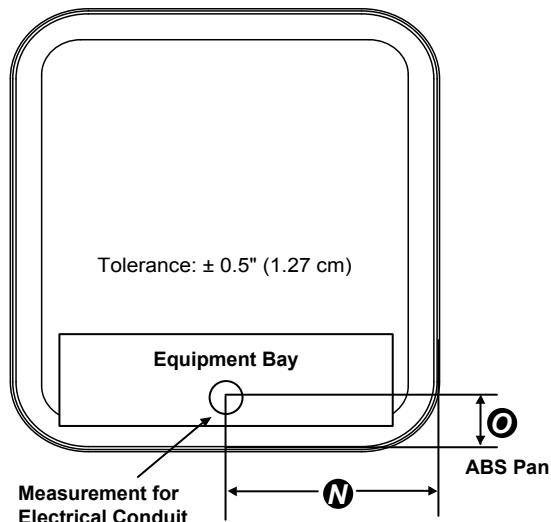


**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.


# Complete Dimensions- J400 Collection Models

Spa Models	DIMENSIONS A-F (All measurements are an approximate $\pm .5"$ )					
	A	B	C	D	E	F
J-495	110" (279.40 cm)					
J-485		91" (231 cm)	31.25" (79.38 cm)			
J-475				37.50" (95.25 cm)	43.50" (110.49 cm)	
J-445		84" (213.5 cm)	84" (213.5 cm)	29.75" (75.57 cm)		
J-435						$\approx 8.0"$ (20.32 cm)
J-425	87" (220.98 cm)	76" (193.04 cm)	28" (71.12 cm)	34" (86.36 cm)	40" (101.60 cm)	
Spa Models	DIMENSIONS G (All measurements are an approximate $\pm .5"$ )					
	G	H (Drain)	CLEARRAY®	 <p>IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.</p>		
J-495						
J-485						
J-475	$\approx 15.0"$ (38.10 cm)	Front Right	Front Center			
J-445						
J-435						
J-425						


**Spa Top View (J-485 Illustrated)**

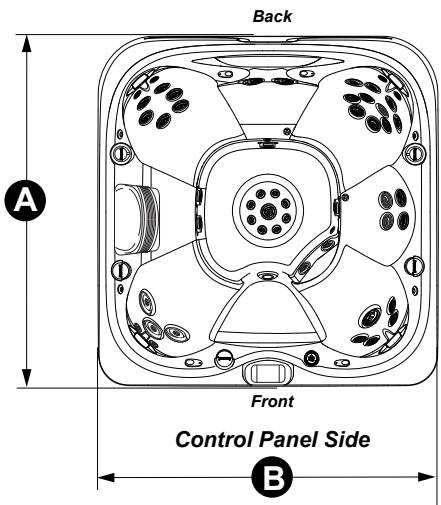

**Control Panel Side View**

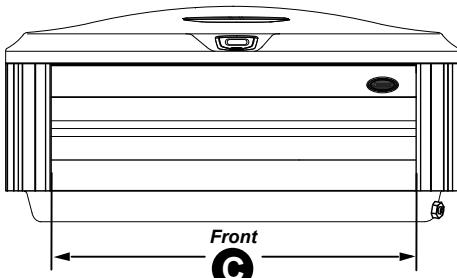


**Spa Bottom View (J-485 Illustrated)**

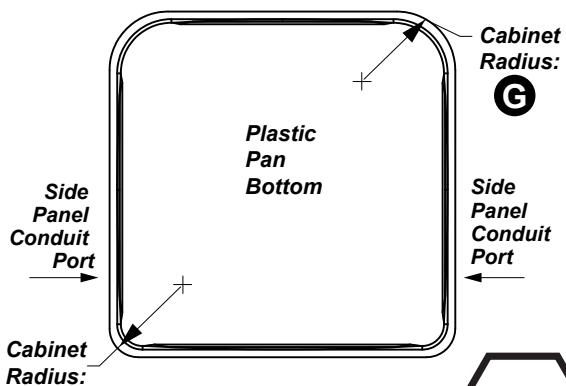

**Side View (J-485 Illustrated)**

**Left/Right Side Panel**

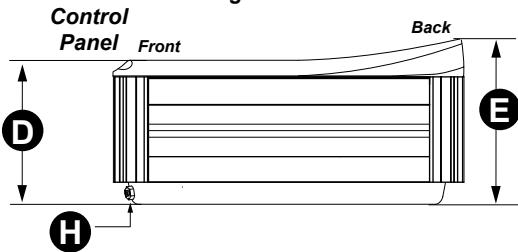

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

## **Complete Dimensions - J-LX Collection Models**

**TBA**


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

# Complete Dimensions - J300 Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-385	91" (231.1 cm)	91" (231.1 cm) 66.50" (168.91 cm) 84" (213.4 cm) 76" (193 cm)	66.75" (169.55 cm)	9.0" (22.86)	15.75" (40.01 cm)	32" (81.28 cm)
J-375			66.50" (168.91 cm)			
J-365			84" (213.4 cm)		13.5" (34.09 cm)	30.50" (77.47 cm)
J-355			76" (193 cm)		10.75" (27.31 cm)	28" (71.12 cm)
J-345			52.5" (133.35 cm)		9.50" (24.13 cm)	26.25" (66.68 cm)
J-335			52.0" (132.08 cm)			
J-325						
J-315	66" (167.6 cm)					
DIMENSIONS G-I (All measurements are an approximate)						
G	H	I	CLEARRAY®	Front Center		
J-385	37.50" (95.25 cm)	26" (66.04 cm)	12" (30.48 cm)		IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.	
J-375			29" (73.66 cm)			
J-365		36" (91.44 cm)	24.50" (62.23 cm)			
J-355		33.50" (85.09 cm)	21.5" (54.61 cm)			
J-345	31.75" (80.65 cm)		12" (30.48 cm)			
J-335						
J-325						
J-315						

- Dimensions Subject to Change Without Notice -



Spa Top View (J-385 Illustrated)

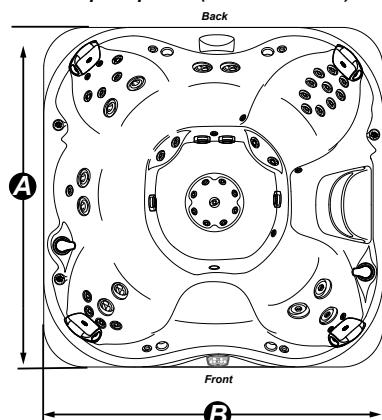

Control Panel Side View (All Models)

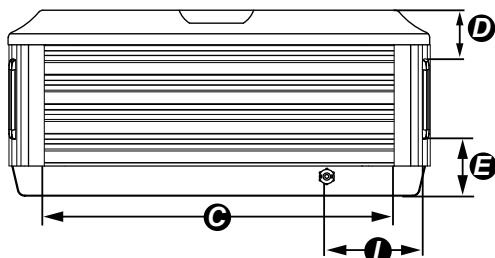

Rear Side View (All Models)

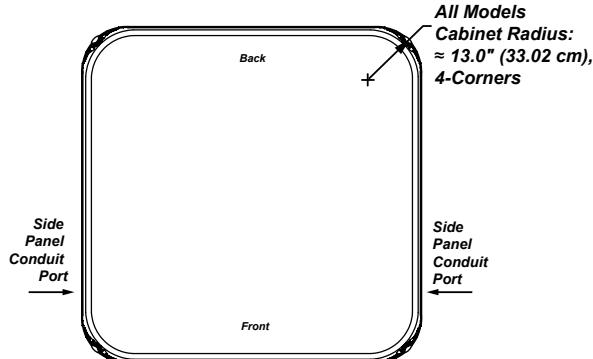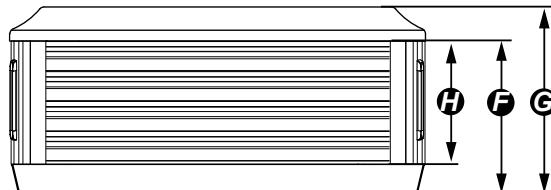


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

# Complete Dimensions-All J200 Collection Models

Spa Models	DIMENSIONS A-G (ALL MEASUREMENTS ARE AN APPROXIMATE)						
	A	B	C	D	E	F	G
J-210 (Round Spa)	78" (198.0 cm)		77.25" (196.2 cm) Round	30" (76.2 cm)	36" (91.5 cm)	77.25" (196.2 cm) Round	N/A
J-215	66" (168 cm)	76" (193 cm)	75.5" (191.8 cm)	28" (71.1 cm)	32" (81 cm)	75.5" (191.8 cm)	8.0" (20.3 cm)
J-225	84" (213.5 cm)	76" (193 cm)	75.5" (191.8 cm)	30.5" (77.5 cm)	34.5" (87 cm)	75.5" (191.8 cm)	8.0" (20.3 cm)
J-235	84" (213.5 cm)	84" (213.5 cm)	83.25" (211.4 cm)	32.5" (82.5 cm)	36" (91.5 cm)	83.25" (211.4 cm)	8.0" (20.3 cm)
J-245	84" (213.5 cm)	84" (213.5 cm)	83.25" (211.4 cm)	32.5" (82.5 cm)	36" (91.5 cm)	83.25" (211.4 cm)	8.0" (20.3 cm)
J-275	90" (228.6 cm)	90" (228.6 cm)	89.25" (226.7 cm)	32.5" (82.5 cm)	36.5" (92.7 cm)	89.25" (226.7 cm)	8.0" (20.3 cm)
J-280	90" (228.6 cm)	90" (228.6 cm)	89.25" (226.7 cm)	32.5" (82.5 cm)	36.5" (92.7 cm)	89.25" (226.7 cm)	8.0" (20.3 cm)
DIMENSIONS H-I (ALL MEASUREMENTS ARE AN APPROXIMATE)							
	H	I	CLEARRAY®	Drain			
J-215	11.25" (28.6 cm)	4.25" (10.8 cm)	None	Right			
J-225	10.75" (27.3 cm)	4.25" (10.8 cm)	Center	Left			
J-235	10.5" (26.67 cm)	4.5" (11.43 cm)					
J-245	10.5" (26.67 cm)	4.5" (11.43 cm)					
J-275	11.5" (29.21 cm)	4.5" (11.43 cm)					
J-280	11.5" (29.21 cm)	4.5" (11.43 cm)					


- Dimensions Subject to Change Without Notice -

Spa Top View (J-235 Illustrated)


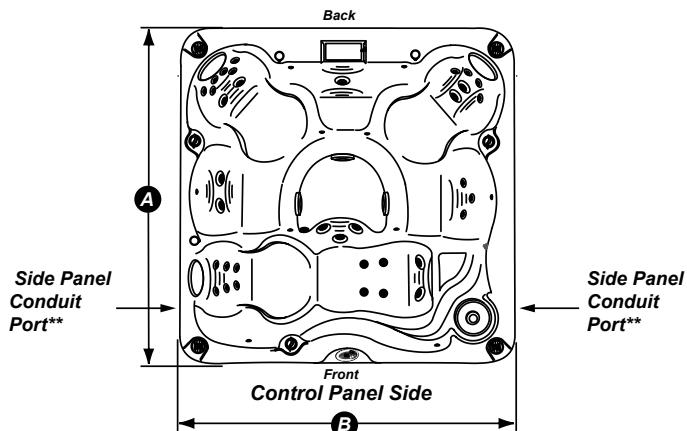


\*\*Single Conduit Port Available on Round J-210 Models at Front Panel Side of Spa.

Control Panel  
Side View (All Models)

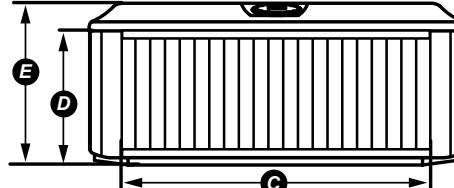


Left/Right  
Side View (All Models)

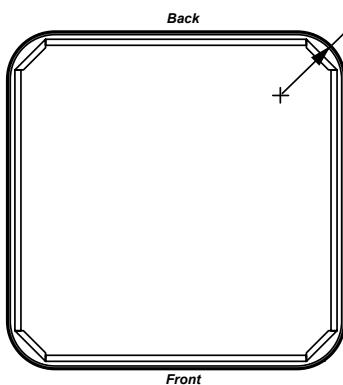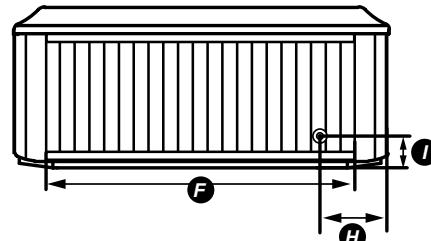

Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.



Your Jacuzzi Hot Tub Dealer is:

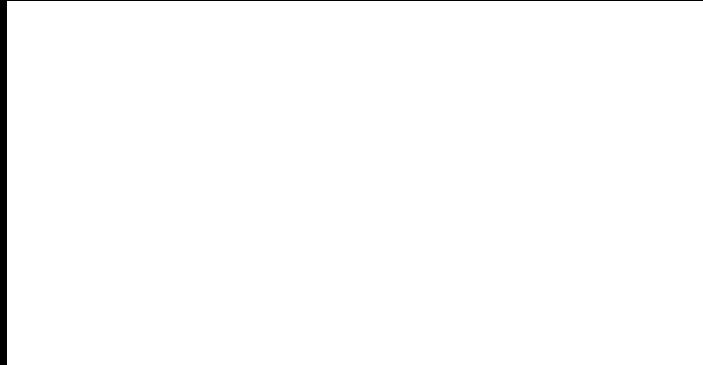

**www.Jacuzzi.com**  
**14525 Monte Vista Ave.**  
**Chino, CA 91710**

**(09/2021) GME-1249 Rev. M**  
**© 2021 Jacuzzi Hot Tubs**